

MATRIZ DE CONMUTACIÓN DE AUDIO

UMX-2M3 Tarjeta con 2 entradas de audio para música (1 slot)



Descripción

- Dos entradas independientes.
- Conectores RCA estéreo, con suma interna de los canales L y R de cada entrada.
- Potenciómetros individuales para el ajuste del nivel de audio.
- Sensibilidad de entrada configurable a través de software: AUX H (775 mV) y AUX L (100 mV)

Número de entradas	2
Controles	Ajuste de volumen
Sensibilidad de entrada	0 dBm / -20 dBm
Relación señal-ruido	> 75 dB
Respuesta en frecuencia	100 Hz ~ 18 kHz
Impedancia de entrada	82 KΩ
Alimentación	A través del chasis
Consumo	100 mA



La tarjeta UMX-2M3 se inserta en el tercer slot de la matriz principal COMPACT



UMX2M3_ES

C/ Barcelona 101
17003 Girona (Spain)
(+34) 972 203 300

 **OPTIMUS**
SOUND & COMMUNICATION


AUDIO SWITCHING MATRIX

UMX-2M3 Card with 2 music audio inputs (1 slot)

Description

- Two independent inputs.
- Stereo RCA connectors, with internal sum of the L and R channels of each input.
- Individual potentiometers for audio level adjustment.
- Configurable input sensitivity through software: AUX H (775 mV) and AUX L (100 mV)

Number of inputs	2, with RCA connectors
Controls	Audio level adjustment
Input sensitivity	0 dBm / -20 dBm
Signal / Noise ratio	> 75 dB
Frequency response	100 Hz ~ 18 KHz
Input impedance	82 KΩ
Power supply	Through mainframe
Consumption	100 mA

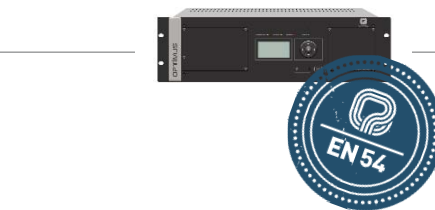

UMX-2M3 card can be inserted in the third slot of COMPACT audio matrix.

