

1CH TOUCHLESS TX TTHS2641E1



1 Introduction



Fig. 1

The Erone Touch transmitter TTHS2641E1 transmitter is a special radio transmitter operating at 433,92 MHz in AM/ASK modulation. It's mainly composed by a capacitive touch sensitive circuit and by a radio transmitter. It can be used to operate gates, doors or garage doors or any device with the corresponding compatible 433 MHz receiver.

It finds its best application everywhere the activation must be done without touching the surface, avoiding in this way any diffusion of bacteria or virus.

The security protocol is a KeeLoq® Hopping code.

The enclosure allows outdoor installations (IP55).

Each product is already factory programmed with a different security code. The transmitter is battery supplied with a ER14505 lithium battery for 2 year life.

Color	P/N	F-code
White	TTHS2641E1B	F0105000013
Black	TTHS2641E1N	F0105000014

FCC ID : PWJTHH

"The device complies with part 15 of the FCC Rules. Operation is subjected to the following 2 conditions:

(1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation"

2 Technical Specifications

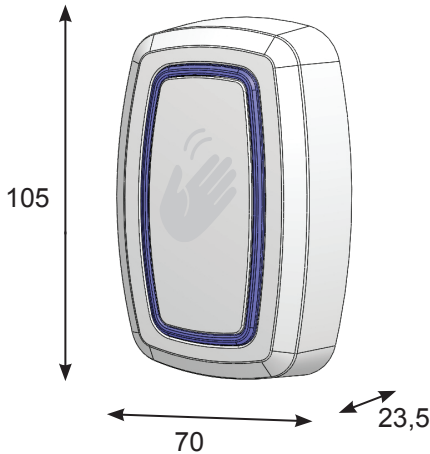


Fig. 2

Carrier frequency	433,92 MHz
Modulation	AM/ASK
N° channels	1
E.r.p.	300 uW
Battery type	ER14505 Lithium
Operating voltage	3,6 Vdc
Current consumption	2 µA : stand-by
	60 mA : transmission
Battery life	2 years
Security protocol	KeeLoq® Hopping code
Code combinations	2exp64
Range in open space	200/300 m
Activation distance	4 cm
Operating temperature	-20°/+80°C
Enclosure IP grade	IP55
Dimensions (mm)	105 x 70 x 23,5
Weight (gr.)	100

3 Mounting

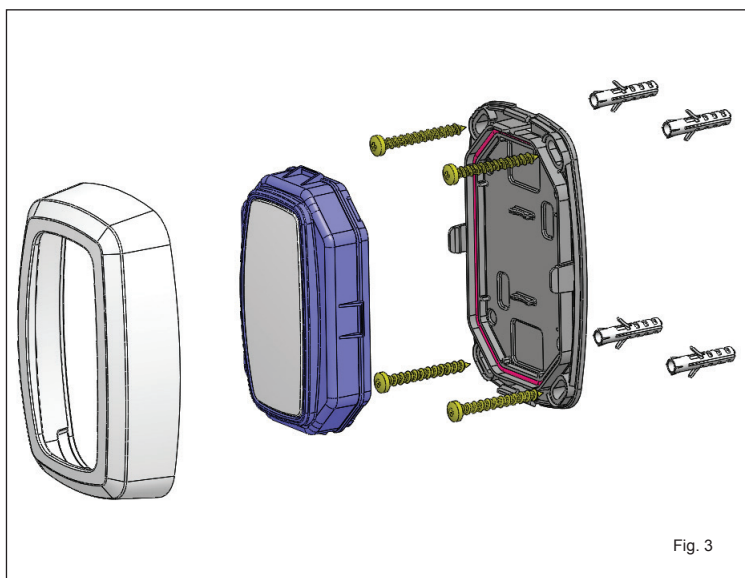


Fig. 3

4 Battery replacement

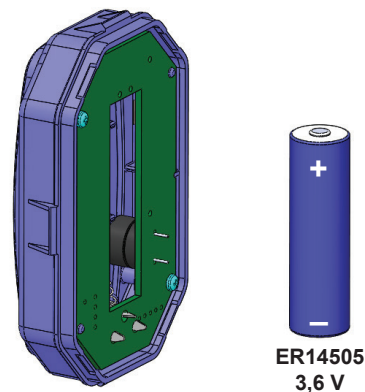



Fig. 4




Replace the battery with another identical or equivalent respecting the polarity as indicated above

NOTE: Please dispose of the batteries correctly, they are hazardous waste.

5 Use

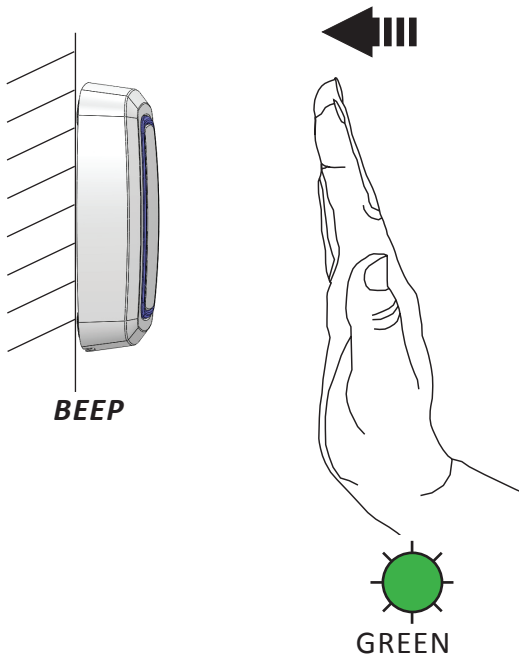

6 Battery Low

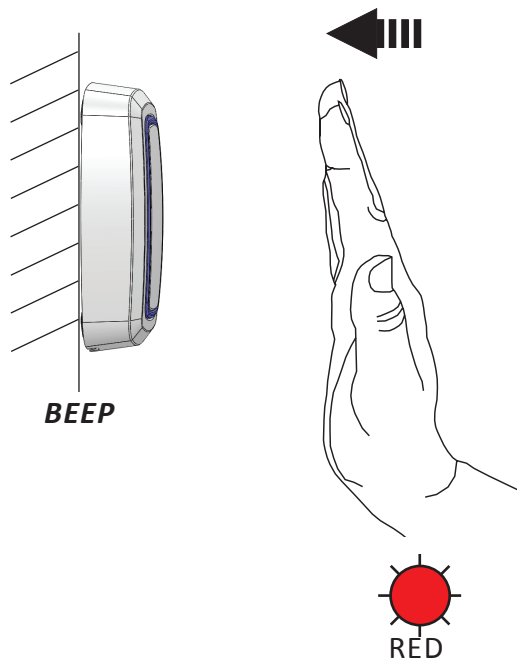

The light of the touch transmitter becomes GREEN when the hand approaches at about 4 cm and RF transmission starts at the "Beep" of the buzzer.

In case of battery low the GREEN color becomes RED.

7 Memorization

For the memorization of the transmitter onto the corresponding receiver, follow the procedure described on the receiver manual. The touch transmitter is read by any Erone receiver as the button "A"

8 Guarantee

The warranty period for this product is 24 months, beginning from the manufacturer date. During this period, if the product does not work correctly, due to a defective component, the product will be repaired or substituted at our discretion. The guarantee does not cover the plastic container integrity. After-sale service is supplied at the factory.

"The device complies with part 15 of the FCC Rules. Operation is subjected to the following 2 conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation"

RF EXPOSURE WARNING

This EUT is in compliance with MPE for general population / uncontrolled exposure limits and it had been tested in accordance with the measurement methods and procedures specified in FCC 47 CFR § 1.1310 and 2.1091

To satisfy FCC RF exposure requirements for mobile transmitting devices, a separation distance of 20 cm or more should be maintained between the antenna of this device and persons during device operation.

To ensure compliance, operations at closer than this distance are not recommended. The antenna used for this transmitter must not be co-located in conjunction with any other antenna or transmitter.



CDVI WIRELESS SPA
Via Piave, 23
31020 S. Pietro di Feletto
(TREVISO) - ITALY

Tel: +39 0438 450860 r.a.
Fax: +39 0438 450628
e-mail: info@erone.com
web: www.erone.com

P.Iva 03023780269
REA 216215 TV
RI 38571 TV
CS 4 400.000.00

EU DECLARATION OF CONFORMITY (DoC)

The company CDVI WIRELESS S.p.A., Via Piave, 23 - 31020 S.PIETRO DI FELETTO (TV) - ITALY, as manufacturer,

DECLARES

that the DoC is issued under his sole responsibility and belongs to the following product:

Brand : **ERONE**
Description : **TRANSMITTER TOUCH**
Type(s) : **TTH2641E1N / TTH2641E1B**

is in full compliance with the essential requirements of the European Directive 2014/53/UE (RED):

The appliance full complies with the following Regulations :

- EN 62479:2010
- EN 301 489-1 V2.1.1
- EN 301 489-3 V2.1.0
- EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013
- EN 300 220-1 V 3.1.1
- EN 300 220-2 V 3.1.1

S. Pietro di Feletto, 13/6/2017

Ing. G. Massimo Dalle Carbonare

(Signature)

(Product manager)

The present document has been issued in compliance with the Directive 2014/53/UE Annex VI

1 Presentazione



Fig. 1

TX DI PROSSIMITA' 1CH TTHS2641E1

Il trasmettitore di prossimità Erone TTH2641E1 è un trasmettitore speciale funzionante a 433,92 MHz in modulazione AM/ASK. E' composto principalmente da un sensore capacitivo e da un circuito radio trasmettente. Può essere utilizzato per comandare cancelli, porte, basculanti o altri dispositivi assieme al ricevitore corrispondente compatibile con la gamma Erone 433.

Trova la sua migliore applicazione dove il comando radio deve essere dato senza toccare alcuna superficie, evitando in questo modo la diffusione di germi o virus.

Il protocollo di sicurezza è del tipo KeeLoq® Hopping code.

Il contenitore consente installazioni all'aperto (IP55).

Ciascun prodotto è già preprogrammato in fabbrica con un numero seriale univoco. La batteria al litio del tipo ER14505 consente un funzionamento di 2 anni in condizioni medie di utilizzo.

Colore	Articolo	Codice F
Bianco	TTHS2641E1B	F0105000013
Nero	TTHS2641E1N	F0105000014

2 Specifiche tecniche

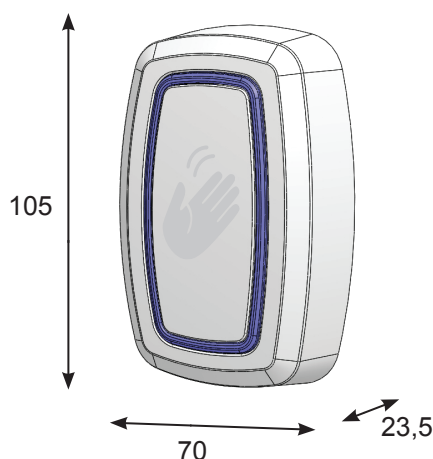


Fig. 2

Frequenza portante	433,92 MHz
Modulazione	AM/ASK
N° canali	1
E.r.p.	300 uW
Batteria	ER14505 Litio
Alimentazione	3,6 Vdc
Consumo di corrente	2 µA : stand-by
.....	60 mA : trasmissione
Durata batteria:	2 years
Protocollo di sicurezza	KeeLoq® Hopping code
Combinazioni	2exp64
Portata (in spazio libero)	200/300 m
Distanza di attivazione	4 cm
Temperatura di funzionamento	-20°/+80°C
Protezione contenitore	IP55
Dimensioni (mm)	105 x 70 x 23,5
Peso (gr.)	100

3 Montaggio

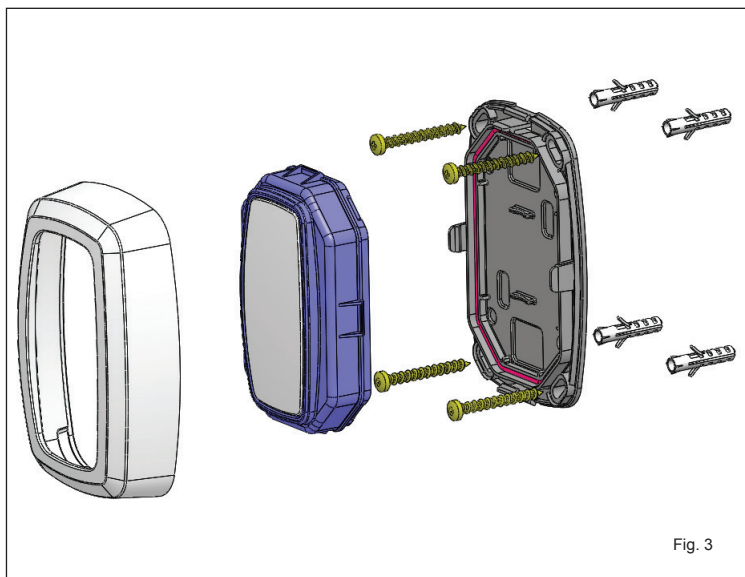


Fig. 3

4 Sostituzione della batteria

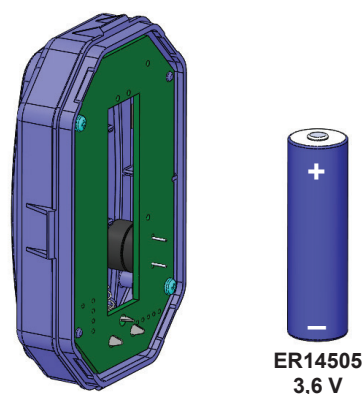



Fig. 4




Sostituire la batteria con un modello identico o equivalente rispettando la polarità come indicato in fig.4

NOTA: Smaltire le batterie correttamente : sono rifiuti speciali

5 Uso

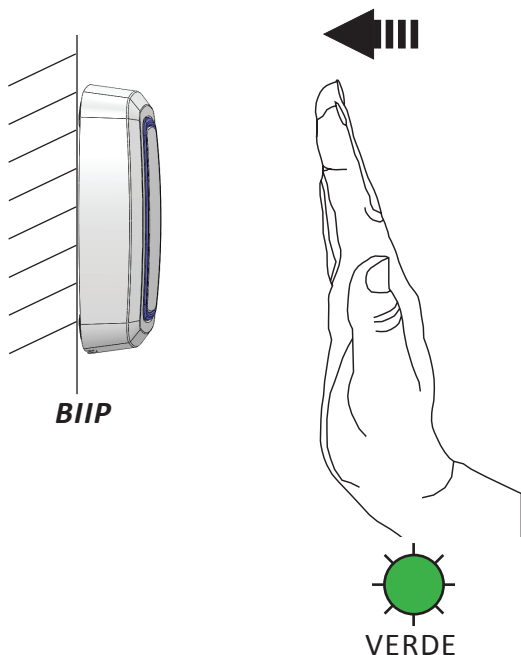

6 Batteria bassa

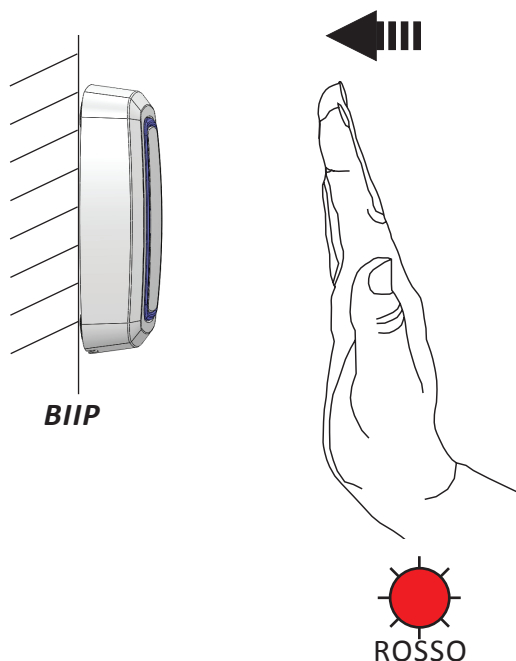

La luce della cornice diventa VERDE quando la mano si avvicina a circa 4 cm dalla superficie : a quel punto si innesca la trasmissione radio e il buzzer emette un Bip.

Nel caso di batteria bassa il colore cambia da VERDE a ROSSO.

7 Memorizzazione nel ricevitore

Per la memorizzazione del codice del trasmettitore nel ricevitore corrispondente, seguire le indicazioni riportate nel manuale del ricevitore. Il trasmettitore è monocanale e viene interpretato dal ricevitore come il tasto "A" di un qualunque trasmettitore della gamma Erone.

8 Garanzia

La garanzia è di 24 mesi dalla data di fabbricazione apposta all'interno. Durante tale periodo, se l'apparecchiatura non funziona correttamente, a causa di un componente difettoso, essa verrà riparata o sostituita a discrezione del fabbricante. La garanzia non copre l'integrità del contenitore plastico.

La garanzia viene prestata presso la sede del fabbricante.



Costruito da :
CDVI WIRELESS SPA - Via Piave, 23
31020 S. Pietro di Feletto (TV) - Italy
Tel : +39-0438-450960 - Fax : +39-0438-455628
web: www.erone.com - email: info@erone.com



CDVI WIRELESS SPA
Via Piave, 23
31020 S. Pietro di Feletto
(TREVISO) - ITALY

Tel. +39 0438 450860 r.a.
Fax +39 0438 455628
e-mail: info@erone.com
web: www.erone.com

P.Iva 03023780289
REA 216210 TV
RI 38071 TV
CS 4 400.000.00

DICHIARAZIONE DI CONFORMITA' UE (DoC)

La società CDVI WIRELESS S.p.A., Via Piave, 23 - 31020 S.PIETRO DI FELETTO (TV) - ITALY, in qualità di fabbricante,

DICHIARA

che la presente dichiarazione di conformità è rilasciata sotto la sua esclusiva responsabilità ed è relativa al seguente prodotto :

Marchio : **ERONE**

Descrizione : **TRASMETTITORE TOUCH**


Modello(i) : **TTH2641E1N / TTH2641E1B**

è conforme alla pertinente normativa di armonizzazione dell'Unione: Direttiva 2014/53/UE. Il prodotto è conforme alle seguenti Norme armonizzate :

- EN 62479:2010
- EN 301 489-1 V2.1.1
- EN 301 489-3 V2.1.0
- EN 60950-1:2006 + A11:2009 + A12:2011 + A2:2013
- EN 300 220-1 V 3.1.1
- EN 300 220-2 V 3.1.1

S. Pietro di Feletto, 13/6/2017

Ing. G. Massimo Dalle Carbonare



(Product manager)

Il presente documento è stato redatto in conformità alla Direttiva 2014/53/UE Allegato VI



Tel 2. +39 0438 450879 r.a. Fax +39 0438 455628 E-mail: info@erone.com WEB: www.erone.com