




- 1 Rotación 2 motores/corona.
- 2 Superestructura en acero de alta resistencia elástica HLE.
- 3 Articulaciones reforzadas.
- 4 Cinemática adaptada a la descarga de barcos.
- 5 Cucharas en acero anti-abrasión. Vigas reforzadas.

Opción : engrase centralizado.

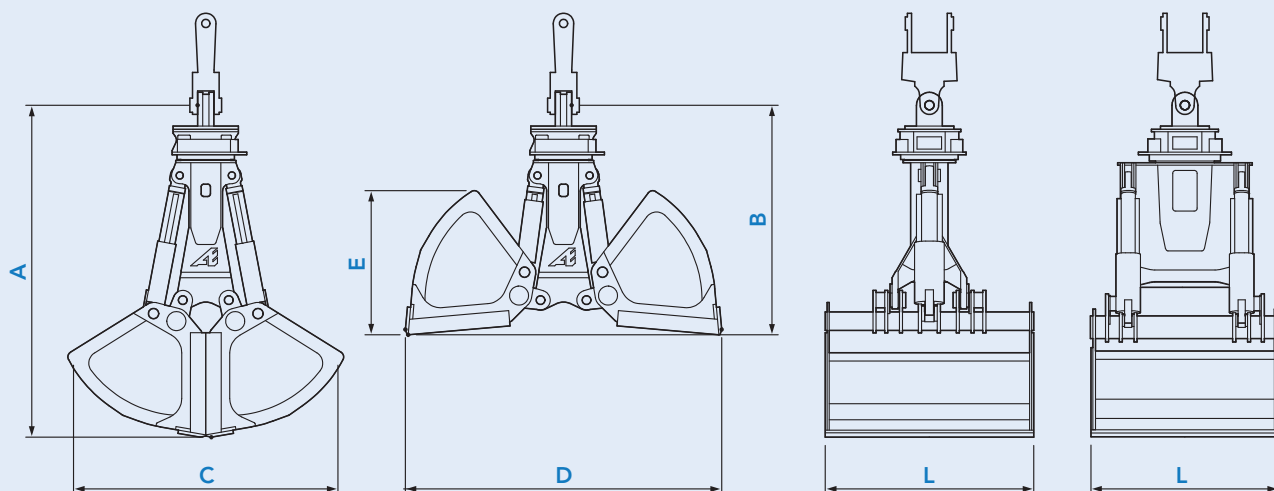

		Ancho	Capacidad		A	B	C	D	E	
	t	mm	l	kg	mm	mm	mm	mm	mm	t
BA614R252	25 - bimotor	1 500	1 440	2 360	2 530	1 815	1 970	2 265	975	27/41*
		1 700	1 640	2 465						
		2 000	1 940	2 615						
		1 500	1 850	2 455	2 650	1 825	2 165	2 500	1 130	
		1 700	2 100	2 565						
		2 000	2 480	2 725						
BA714R252	25 - bimotor	1 500	2 550	3 430	3 160	2 250	2 515	2 890	1 320	39/53*
		2 000	3 420	3 790						
		2 500	4 290	4 150						
		1 500	2 980	3 520	3 260	2 260	2 700	3 095	1 410	
		2 000	4 000	3 880						
		2 500	5 020	4 250						
BA814R401	40 - bimotor	2 000	3 590	5 020	3 250	2 353	2 790	3 160	1 455	53/80*
		2 500	5 020	5 340						
		3 000	6 040	5 740						
		2 000	5 040	5 170	3 420	2 380	3 065	3 480	1 600	
		2 500	6 330	5 580						
		3 000	7 620	6 000						

*Consultenos para definición exacta del equipamiento en función del material a tratar y las características de la máquina portadora.