


- 1 Cuerpo monobloque con espesores de 25 a 120 mm (dependiendo de la máquina).
- 2 Punta desmontable de gran tamaño.

- Demolición de losas.
- Ranurado de suelos muy duros.
- Derribo de árboles.
- Etc...

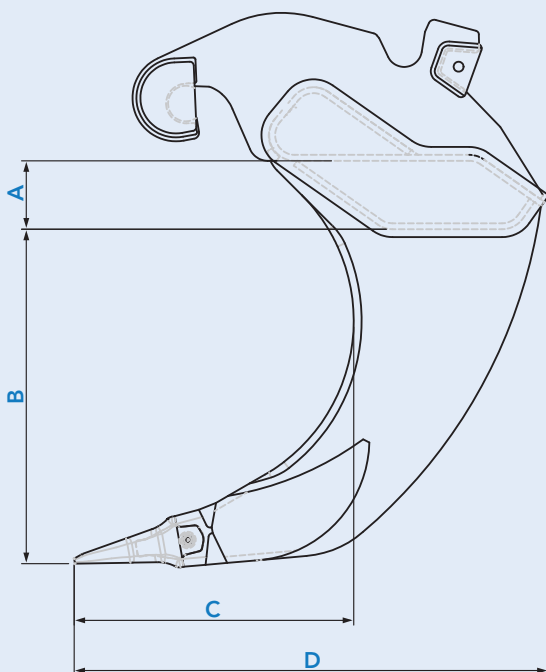

		A	B	C	D	Espesor del cuerpo	Espesor de los refuerzos		
	kg	mm	mm	mm	mm	mm	mm		t
D05	30	45	377	326	511	S690 25	HD450 12	P200	1/2,4
D10	75	77	512	385	652	HD450 30	HD450 25	P432	3/6
D20	125	102	594	423	759	HITUF 40	HD450 20	P432	7,5/11
D30	260	132	704	556	969	HITUF 50	HD450 20	P530	12/15
D40	380	147	773	584	1 052	HITUF 60	HD450 25	P630	16/19
D50	550	173	833	679	1 172	HITUF 80	HD450 20	P730	20/26
D60	800	163	920	700	1 272	HITUF 100	HD450 30	S11	27/37
D70	1 300	180	1 008	746	1 396	HITUF 100	HD450 35	S13	38/53
D80	2 070	195	1 200	850	1 600	HITUF 120	HITUF 50	S15	54/70
D90	2 600	210	1 400	959	1 823	HITUF 120	HITUF 50	S17	71/90