

EMERGENCY SHOWERS AND EYEWASH FIRE-PROOF CABINETS



www.epitecnica.com

PRODUCT INDEX

Emergency Eyewash.....	P. 3 to 6
Laboratory Eyewash.....	P. 7 to 8
Emergency Showers.....	P. 9 to 10
Emergency Showers with Eyewash.....	P. 11 to 14
Eyewash Bottles.....	P. 15
Portable Plastic Tank Eyewash.....	P. 16
Portable Pressurized Eyewash.....	P. 17 to 18
Decontamination Booth.....	P. 19 to 20
Air Showers for Cleanrooms.....	P. 21 to 22
PPE's Sterilization Cabinet.....	P. 22
Fire-Proof Cabinets.....	P. 23 to 24
Fire-Proof Cabinets for Laboratories.....	P. 25 to 26
Outdoor Storage for Hazardous Products.....	P. 27 to 28
PVC Cabinets for Corrosive Products.....	P. 29
Fire-Proof Cabinets for Paper Documents.....	P. 30
Fireman Suits Cabinets.....	P. 31
Special Cabinets.....	P. 32



EPITECNICA EUROPA, S.L. is a company with more than 30 years of global experience and more than 10 years in the Spanish market.

Specifically dedicated to the manufacture of equipment for the protection of accidents and fires.

Our mission:
Develop and manufacture emergency equipment under the Epitecnica brand, having as a principle the quality and protection of people.

PEDESTAL MOUNTED 6023BAS BASIC MODEL



Structure built in hot-dipped galvanized steel tube coated with baked corrosion resistant yellow paint. Aluminum fixing foot that prevents corrosion at the base of the equipment.

Eyewash built with stainless steel receiver diameter 275 mm and stainless steel sprinklers that produce aerated water with effect of eye/face wash. The spray nozzles with pressure and flow regulator have automatic anti-dust plastic caps.

Eyewash operation through a brass ball valve with stainless steel manual lever with instructions and built-in signaling.



OPTIONAL ACCESORIES



SIGNALING
Ref. 6642



FLOW REDUCER
Ref. 6600REG



SIGNALING FLOOR
Ref. SD1009520



GAUGE FOR EYEWASH
Ref. 6607



The presence of an emergency eyewash is not a substitute for the use of personal, facial and / or eye protection equipment, against the splash of dangerous or irritating liquids.



DETAILS



6023PLA

PRODUCTS FAMILY



6033EVO



6030PLA



6031BAS



6030BAS

MODEL	INLET	DRAIN	FLOW
6023BAS	1/2" BSPT - F	3/4" BSPT - F	11,5 Lts/min
6030BAS	1/2" BSPT - F	1-1/4" BSPT - F	11,5 Lts/min
6030PLA	1/2" BSPT - F	1-1/4" BSPT - F	11,5 Lts/min
6031BAS	1/2" BSPT - F	1-1/4" BSPT - F	11,5 Lts/min
6033EVO	1/2" BSPT - M	-----	11,5 Lts/min

Basic model with ABS plastic receiver and pedestal for fixing to the floor with aluminum foot that prevents the corrosion.

Eyewash with stainless steel and silicone anti-lime heads, and dust protection caps. Wall bracket and hose of 1.50 meters, flexible rubber covered with stainless steel.

Basic model with ABS plastic receiver and high resistance aluminum support to fix to the wall.

Model built entirely in stainless steel with high strength support for fixing to the wall.

Basic model with high resistance aluminum support to fix to the wall.

WALL MOUNTED 6030FUL

MODEL WITH AUTOMATIC DUST-COVER



Structure built in hot-dipped galvanized steel tube coated with baked yellow paint.

It includes an aesthetic chromed brass discharge system and aluminum support to the wall.

Eyewash built with stainless steel receiver diameter 275 mm and stainless steel cover that prevents dirt and opens automatically, its stainless steel and anti-lime silicone spray-nozzles, produce aerated water with effect of eye/face wash.

It has a pressure and flow regulator.

Eyewash operation through a brass ball valve with stainless steel manual lever with instructions and built-in signaling.



DETAILS



MODEL	INLET	DRAIN	EYEWASH FLOW	SHOWER FLOW
6030FUL	1/2" BSPT - F	TUBO 1-1/4"	11,5 Lts/min	-----
6031FUL	1/2" BSPT - F	TUBO 1-1/4"	11,5 Lts/min	-----
6030-6023	1/2" BSPT - F	3/4" BSPT - F	11,5 Lts/min	11,5 Lts/min
6023FUL	1/2" BSPT - M	3/4" BSPT - F	11,5 Lts/min	-----
6023FAC	1/2" BSPT - M	3/4" BSPT - F	11,5 Lts/min	-----
6023FAE	1/2" BSPT - M	3/4" BSPT - F	11,5 Lts/min	-----
6023LEG	1/2" BSPT - F	3/4" BSPT - F	11,5 Lts/min	-----
6023-6032	1/2" BSPT - F	3/4" BSPT - F	11,5 Lts/min	11,5 Lts/min
6024FUL	1/2" BSPT - F	3/4" BSPT - F	11,5 Lts/min	-----

PEDESTAL MOUNTED 6023FUL

MODEL WITH PEDAL AND AUTOMATIC DUST-COVER



Structure built in hot-dipped galvanized steel tube coated with baked yellow paint.

Aluminum fixing foot that prevents corrosion at the base of the equipment.

Eyewash built with stainless steel receiver diameter 275 mm and stainless steel cover that prevents dirt and opens automatically, its stainless steel and anti-lime silicone spray-nozzles, with pressure and flow regulator produce aerated water with effect of eye/face wash.

Eyewash operation through a brass ball valve with stainless steel with aluminum pedal and manual lever with instructions and built-in signaling.



DETAILS



PRODUCTS FAMILY



6031FUL

6030-6023

Entirely stainless steel model with high resistance support to fix to the wall and stainless steel cover that prevents dirt and opens automatically.

Model with high resistance support to fix to the wall and stainless steel cover that prevents dirt and opens automatically, and flexible hose 1.50 mts long with hand shower.



6023FAC

6023FAE

6023LEG

Model with automatic anti-freeze valve and eyewash protection cap, specially designed to operate at temperatures down to -10°C.

Model with anti-scald automatic valve and eyewash protector cap, which prevents overheating of pipes in areas of very high temperatures.

This eyewash includes a special valve that after each use, completely eliminates the residual water that remains in the system, avoiding the possibility of generating the Legionella bacteria inside.



6023-6032

6024FUL

Model with stainless steel cover that prevents dirt and opens automatically, and flexible hose 1.50 mts long with hand shower.

Entirely stainless steel model with stainless steel cover that prevents dirt and opens automatically.

LAB BENCH EYEWASH 6020EVO FOLDING MODEL



This eyewash made entirely of chromed brass, is specially designed to be used in laboratory counters, allowing to use the same installation of the work sink.

Its folding support allows it not to disturb the daily tasks, and at the time of use is within the reach of the user, offering the emergency service for which it is designed.

The operation is by means of a fast-acting valve. Your spray nozzles produce aerated water and has eye/face wash effect. It has calibrated pressure and flow regulator and dust protection caps. Includes an emergency eyewash sticker.

FLEXIBLE HOSE EYEWASH 6034EVO LAB BENCH HAND SHOWER MODEL



This emergency hand shower is ready to use on any part of the body, for the convenience of its flexible hose. It is designed to be mounted on the lab bench and take care of first aid of splashes on the face and body. Your sprayer is ergonomic and allows water smooth and flushing. Manufactured with ABS plastic handle and stainless steel, with water sprayer and built-in flow control.

Flexible rubber hose covered with stainless steel. Length = 1.50 meters. Automatic valve by trigger of stainless steel and ABS plastic.

MODEL	INLET	DRAIN	FLOW
6020EVO	1/2" BSPT - M	-----	11,5 Lts/min
6034EVO	1/2" BSPT - M	-----	11,5 Lts/min
6035EVO	1/2" BSPT - M	-----	11,5 Lts/min
6029PULS	1/2" BSPT - M	-----	11,5 Lts/min
6032EVO	1/2" BSPT - M	-----	11,5 Lts/min
6028EVO	1/2" BSPT - M	3/4" BSPT - M	11,5 Lts/min
6033EVO	1/2" BSPT - M	-----	11,5 Lts/min
6025GRIFODUAL	M22x1 ó 1/2"	-----	11,5 Lts/min

LAB BENCH EYEWASH 6029PULS BUILT IN MODEL



This eyewash is specially designed so that your stainless steel collector can be embedded in laboratory counters, being fully integrated into the design of the laboratory.

The operation is by means of a push button and mechanism of stainless steel of fast action.

Its sprayer heads made of stainless steel and silicone antical, produce aerated water with eye/face wash effect. It has dust protection caps.

Includes an emergency eyewash sticker.

PRODUCTS FAMILY



6032EVO

6028EVO

6033EVO

6025DUALGRIFO

Eyewash / hand shower with wall bracket and 1.50 m hose, flexible rubber covered with stainless steel.

Eyewash specially designed to be used in laboratory counters, allowing to use the same installation of the work sink.

Eyewash with wall bracket and 1.50 m hose, flexible rubber covered with stainless steel.

Eyewash built in stainless steel to connect directly to the tap, can be mounted on any conventional cold water tap. At the touch of a button you can switch from eyewash to dripping water for washing.

WALL MOUNTED 6017BAS

BASIC MODEL




Structure built in hot-dipped galvanized steel tube coated with baked yellow paint.

Shower with head of diameter 245 mm built in deluge type stainless steel, with relief baffle that produces a water bell with a diameter of 500 mm.

Shower action through brass ball valve with stainless steel hand lever with instructions and built-in signaling.

DETAILS

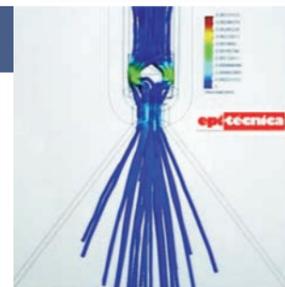

NEW

We have developed the new model of **Head for Emergency Shower** that produces an open and uniform water bell, with a flow rate of 76 Lts / min as required by the UNE-EN 15154 standard.

View of the dynamic 3D model that was used for the development.



MODEL 6017SPK

OPTIONAL ACCESORIES



CURTAIN OF PRIVACY FOR EMERGENCY SHOWER Ref. 6619



TEST KIT FOR EMERGENCY SHOWER Ref.6608R



SIGNAL Ref. 6641



ALARM Ref. 6679EVO



BRACKET Ref. 6000SOP



SAFETY FLOOR Ref. SD1009520



The presence of an emergency shower is not a substitute for the use of personal, facial and / or eye protection equipment, against the splash of dangerous or irritating liquids.



PRODUCTS FAMILY



6015BAS

6019SPK

6018BAS

6032EVO

MODEL	INLET	FLOW
6017BAS	3/4" BSPT - M	76 Lts/min
6017SPK	3/4" BSPT - M	76 Lts/min
6015BAS	3/4" BSPT - M	76 Lts/min
6019BAS	3/4" BSPT - M	76 Lts/min
6019BAS	3/4" BSPT - M	76 Lts/min
6018BAS	3/4" BSPT - M	76 Lts/min
6032EVO	1/2" BSPT - M	11,5 Lts/min

Standing model with aluminum base floor fixing.

6019BAS model entirely in stainless steel to fix the wall.

Model 6019SPK idem previous with spray head that complies with regulations.

Model entirely in stainless steel to fix to the ceiling.

Manual shower model with automatic trigger. Wall bracket and hose of 1.50 meters, flexible rubber covered with stainless steel.

SHOWER WITH EYEWASH 6011BAS

BASIC MODEL



Structure built in hot-dipped galvanized steel tube coated with yellow paint oven process. Aluminum fixing foot that prevents corrosion at the base of the equipment.

Shower head 245 mm diameter made of stainless steel "diluvio type" with relief baffle that produces a bell 500 mm diameter water


Shower drive by ball valve brass with stainless steel hand lever with instructions and embedded signaling.

Eyewash built with stainless steel receiver diameter 275 mm and stainless steel heads that produce aerated and soft water with eyewash and facewasher effect. The heads have pressure and flow rate regulator and automatic anti-dust plastic caps.

Eyewash operation through a brass ball valve with stainless steel manual lever with instructions and built-in signaling.

NEW

We have developed the new model of **Head for Emergency Shower** that produces an open and uniform water bell, with a flow rate of 76 Lts / min as required by the UNE-EN 15154 standard.

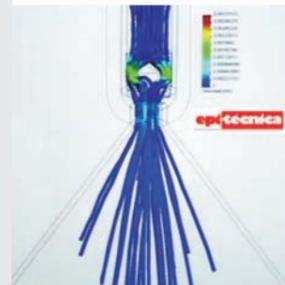

OPTIONAL Model 6011SPK

DETAILS



MODEL	INLET	DRAIN	SHOWER FLOW	EYEWASH FLOW
6011BAS	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min
6011SPK	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min
6011PLA	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min
6011MURINOX	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min
6010BAS	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min
6014	1-1/4" BSPT - F	-----	76 Lts/min	11,5 Lts/min
6011BAS-P	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min

OPTIONAL ACCESORIES



CURTAIN OF PRIVACY FOR EMERGENCY SHOWER Ref. 6619



TEST KIT FOR EMERGENCY SHOWER Ref.6608R



SIGNALS Ref. 6641 AND 6642



ALARM Ref. 6679EVO



BRACKET Ref. 6000SOP



SAFETY FLOOR Ref. SD1009520



The presence of an emergency shower and eyewash is not a substitute for the use of personal, facial and / or eye protection equipment, against the splash of dangerous or irritating liquids.

PRODUCTS FAMILY



Model with ABS plastic shower head and eyewash receiver.	Model with fixing to the wall for easy cleaning in floor.	Model completely built in stainless steel AISI 304L.	Plastic model built with polypropylene AST large wall tubes with UV protection and thermofusion joints, specially designed for zones highly corrosive.	Basic model with the eyewash operation with pedal of aluminum.
--	---	--	--	--

SHOWER WITH EYEWASH 6011FUL

MODEL WITH STAINLESS STEEL DUST-COVER AND FOOT PEDAL



Structure built in hot-dipped galvanized steel tube coated with yellow paint oven process. Aluminum fixing foot that prevents corrosion at the base of the equipment. Shower head 245 mm diameter made of stainless steel "diluvio type" with relief baffle that produces a bell 500 mm diameter water. Shower drive by ball valve brass with stainless steel hand lever with instructions and embedded signaling. Eyewash built with stainless steel receiver diameter 275 mm that includes an stainless steel dust cover who opens automatically when activate the eyewash and stainless steel heads that produce aerated and soft water with eyewash and facewasher effect. It has calibrated pressure and flow rate regulator. Eyewash operation through a brass ball valve with stainless steel manual lever with instructions and built-in signaling.

DETAILS



MODEL	INLET	DRAIN	SHOWER FLOW	EYEWASH FLOW
6011FUL	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min
6010FPHT	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min
6011FAC	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min
6010FUL	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min
6012FUL	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min
6011-6032	1-1/4" BSPT - F	3/4" BSPT - F	76 Lts/min	11,5 Lts/min

OPTIONAL ACCESORIES



CURTAIN OF PRIVACY FOR EMERGENCY SHOWER Ref. 6619



TEST KIT FOR EMERGENCY SHOWER Ref.6608R



SIGNALS Ref. 6641 AND 6642



ALARM Ref. 6679EVO



BRACKET Ref. 6000SOP



SAFETY FLOOR Ref. SD1009520



PRODUCTS FAMILY



<p>Model 6011FAC with automatic anti-freeze valve and eyewash cover, specially designed to operate in temperatures down to -10°C.</p> <p>Model 6011FAE idem to the previous, with anti-scald valve to prevent heating.</p>	<p>Model 6010FPHT with anti-freeze system by electric Heat Tracing , with PVC insulation and Polyurethane foam. Eye protection cap, specially designed to operate in temperatures up to -20°C.</p>	<p>Model completely in stainless steel with stainless steel cover that prevents dirt and automatically opens.</p>	<p>Model with stainless steel cover that prevents dirt and opens automatically. The shower operation by automatic platform.</p>	<p>Model with stainless steel cover that prevents dirt and opens automatically. Include a 1.50 m flexible hose with hand shower.</p>
--	--	---	---	--

EYEWASH STATION 6044EVO WALL MOUNTED




The eyewash station kit consists of:

- 1 500cc Eyewash Bottle
- 1 Wall support cabinet with instructions and signal
- 1 Cartridge of sterile solution (Ref. 6777) for eye wash.

The bottle has an eye cuvette with a suitably shaped lid to allow a quick and comfortable washing of the eyes, eliminate foreign particles and prevent serious injuries to the visual capacity. The head has an automatic valve for the air intake that prevents the reflux of liquid inside the bottle. A small disc pierced in the center of the bucket breaks the jet of water to distribute it evenly in the eye. In addition, it has a discharge tube of the liquid that has washed the eye.

Provide first aid in places where you can not install a conventional eyewash. It is ideal for chemical and oil plants, applications in agriculture, mobile laboratories, workplaces, warehouses, vehicles and any place where water is not accessible.

EYEWASH STATION 56 LITERS DW397 WALL MOUNTED SELF-CONTAINED



This portable unit operated by gravity, does not require installation of pipes, manufactured with a 56 liter high impact polyethylene tank. Ensures that first aid, in the use of substances with potential eye damage, is always possible.

Allows eye wash for more than 15 minutes

Includes a support for easy installation indoors and outdoors. It is ideal for chemical and oil plants, applications in agriculture, mobile laboratories, workplaces, warehouses and any place where water is not accessible. The unit includes an innocuous bactericidal additive (article 6800) to allow water storage for a long time.



BACTERIOSTATIC PRESERVATIVE

Model 6800 DOSE FOR EYEWASHES from 32 to 50 Lts
Model 6812 DOSE FOR EYEWASHES from 15 to 25 Lts
Model 6810 DOSE FOR EYEWASHES from 100 to 150 Lts

PRODUCTS FAMILY



EYEWASH STATION
IN A WALL MOUNTED BOX
6044CAJA

Eyewash station kit consists of:
2 500cc Eyewash Bottles
1 Protective wall box with instructions and signal
2 Cartridges of sterile solution (Ref. 6777) for eye wash.



EYEWASH BOTTLE
6046

Eyewash bottle with 0.2 Liters of neutral pH solution



EYEWASH BOTTLE
6047

Eyewash bottle with 0.5 Liters of neutral pH solution



EYEWASH BOTTLE
6048

Eyewash bottle with 1 Liter of neutral pH solution



PORTABLE EYEWASH
WITH CART
DW396-6684

The cart with a collector bucket transforms the wall eyewash into a transportable element, which allows to easily have the eyewash in the place of risk.



SELF-CONTAINED
EYEWASH
DW396

Manufactured with a 32 liters high impact polyethylene tank. Includes a Bacteriostatic Preservative dose Model 6800 for water conservation.



PORTABLE EYEWASH
WITH CART
DW396-6684

The cart with a collector bucket transforms the wall eyewash into a transportable element, which allows to easily have the eyewash in the place of risk.



SELF-CONTAINED EYEWASH
WITH THERMAL JACKET
DW397+9023

Self-contained 56 liter eyewash with antifreeze electric thermal jacket. Includes a Bacteriostatic Preservative dose Model 6800 for water conservation.

PRODUCTS FAMILY

EYEWASH WITH HAND SHOWER MODEL 6050R2D2

50 LITERS PORTABLE AIR-PRESSURIZED



This portable unit does not require pipe installation, it is portable and transportable. Ensures that first aid, in the use of substances with potential eye damage, is always possible. It is ideal for chemical and oil plants, and any place where water is not accessible.

Allows eye wash for more than 15 minutes

Technical characteristics:

Tank material: stainless steel

Tank capacity: 50 useful liters

Long hose: 1500 mm

Valves: quick-action stainless steel

Eyewash operation: by manual lever

Shower action: by automatic cutting gun

It is charged with potable water and pressurized with compressed air by means of a valve of the automobile pneumatic type.

The unit includes an innocuous bacteriostatic Preservative (Model 6800) to allow water storage for a long time.



DETAILS



MODEL	TANK CAPACITY	SHOWER FLOW	EYEWASH FLOW
6050R2D2	50 Liters	11,5 Lts/min	11,5 Lts/min
6060EVO	15 Liters	11,5 Lts/min	11,5 Lts/min
6070EVO	15 Liters	11,5 Lts/min	11,5 Lts/min
6100R2D2	100 Liters	11,5 Lts/min	11,5 Lts/min
6100DUCHA	100 Liters	11,5 Lts/min	11,5 Lts/min



BACTERIOSTATIC PRESERVATIVE

Model 6800 DOSE FOR EYEWASHES from 32 to 50 Lts
 Model 6812 DOSE FOR EYEWASHES from 15 to 25 Lts
 Model 6810 DOSE FOR EYEWASHES from 100 to 150 Lts

OPTIONAL ACCESORIES



SIGNALS
Model 6641 AND 6642



ANTI-FREEZE
THERMAL JACKET
Model 9011



WATER COLLECTOR
Model SP-120



CHARGING GUN
WITH MANOMETER
Model 6605



The presence of an emergency shower and eyewash is not a substitute for the use of personal, facial and / or eye protection equipment, against the splash of dangerous or irritating liquids.



PRODUCTS FAMILY



6060EVO-C



6060EVO



6070EVO-C



6070EVO



6100R2D2



6100DUCHA

Portable air-pressurized model with 15 liter stainless steel tank to be used as an eyewash or manual shower.

Model 6060EVO-C with cart.

Portable air-pressurized model with 15 liter stainless steel tank to be used as an eyewash.

Model 6070EVO-C with cart.

Portable air-pressurized model with 100 liter stainless steel tank to be used as an eyewash or a hand shower. Allows eye wash for more than 25 minutes.

Portable air-pressurized model with 100 liter stainless steel tank to be used as an eyewash or an emergency shower. Allows eye wash for more than 25 minutes.

SHOWER & EYEWASH SELF-CONTAINED MODEL 6180-1250 WITH 1250 LITERS TANK



It is equipped with a 1250 liters food grade polyethylene tank, which guarantees a minimum of 15 minutes of water flow. Its operation is by gravity. The tank is made of plastic material so it does not require anticorrosive maintenance. Structure totally constructed in stainless steel and enclosures in plates of PVC or PVC M1. Equipped with visual indicator of water level.

Shower head with 245 mm diameter built in stainless steel "deluge type" with relieving baffle, which produces a 500 mm diameter water bell. Actuation of the shower by stainless steel ball valve and stainless steel manual lever with indicator sign and instructions for use incorporated.

Eyewash built with 275 mm diameter stainless steel receiver and sprinklers that produce aerated water with eyewash and fecewash effect. Equipped with stainless steel cover that protect the eyewash and opens automatically. Eyewash operation by stainless steel ball valve, by means of foot pedal and stainless steel manual lever, with indicator and built-in instructions for use.

A bactericidal additive is provided to preserve water.

OPTIONAL ACCESSORIES:

- Electrical heater for tank (ATEX available)
- Sound and light alarm (ATEX available)
- External lighting (ATEX available)
- Panic bar for shower operation
- Authomatic valve Anti-Freeze
- Electrical cooler for tank (ATEX available)
- Swich Flow (ATEX available)
- Cabine Electrical Heater (ATEX Available)
- Swinging Doors with inspection windows
- Authomatic valve Anti-Scald

PRODUCTS FAMILY



PLÁSTIC CABIN
6210PLA

Decontamination plastic cabin composed of emergency shower and eyewash.

Structure built in great thick plastic panels.

Suitable for laboratories or areas of high corrosion.



SHOWER-EYEWASH CABIN
6112

Structure built in stainless steel pipe. Decontamination cabin composed of emergency shower and eyewash, both powered by individual platforms.

Shower: equipped with 16 sprinklers that produce water spray.



SHOWER WITH EYEWASH
6130AI

Structure built in stainless steel pipe. Decontamination cabin composed of emergency shower and eyewash, both powered by individual platforms.

Shower: equipped with central shower head and 4 laterals sprinklers that produce water spray.



SHOWER-EYEWASH CABIN
6150EVO

Structure built in stainless steel pipe. Decontamination cabin composed of emergency shower and eyewash.

Shower: equipped with 12 sprinklers that produce water spray.

Actuation of the shower by barrier.

EMERGENCY SHOWER & EYEWASH FOR EXTREME CLIMATES MODEL 6210WOP - TEMPERING WATER - WATER TEMPERATURE CONTROL



Cabine built in a special structure of treated wood and yellow polyuretane coated, specially designed to resist very corrosive environments and low temperatures conditions. Swinging doors. Piping, fitting and tank in stainless steel AISI 304L.

Shower head 220 mm stainless steel, with air baffle, delivering a 500 mm in diameter water cone. Eyewash include stainless steel assembly of flow control and heads which delivers a soft water flow. Stainless steel ball valves.

The hot water stored in the stainless steel tank of 450 liters is mixed with cold water supply through of a thermostatic mixing valve protected against scald. This Tempering Water Decontamination Booth is supplied in one module ready to use. Hooks for lift and holes for forklift truck included.

OPTIONAL ACCESSORIES:

- Sound and light alarm (ATEX available)
- Swich Flow (ATEX available)
- External lighting (ATEX available)
- Internal Lighting (ATEX Available)
- Cabine Electrical Heater (ATEX Available)
- Platform to Shower Operation
- Authomatic valve Anti-Freeze
- Authomatic valve Anti-Scald

PRODUCTS FAMILY



SHOWER-EYEWASH CABIN
6210AI + 6662-450

Decontamination cabin composed of shower and emergency eyewash.

Structure built in stainless steel with swing doors and security visors.

Water heating module with 450 Lts. tank.



SHOWER WITH EYEWASH
6011CEVA

Emergency shower and eyewash.

Structure built in galvanized steel and insulating panels.

Water heating module with 450 Lts. tank.



SHOWER-EYEWASH CABIN
6210AUAI

Decontamination cabin composed of emergency shower and eyewash. Structure and panels of stainless steel with interior insulation.

It is equipped with a 1250 liter polyethylene tank with automatic replenishment system, with visual indicator of water level and thermometer.



SHOWER-EYEWASH CABIN
6180FAER

Built with a tank of 1250 Lts. which guarantees a minimum of 15 minutes of water flow. Its operation is by gravity. Structure totally constructed in stainless steel and enclosures in PVC plates.

Equipped with electric equipment water cooler tank, which keeps the water at 20°C.

DECONTAMINATION BOOTH

AIR SHOWER MODEL 6410AI



Decontamination cabin by air jets and filtered suction. Built entirely in AISI 304L stainless steel with polycarbonate visors.

Specially designed for the entrance to cleanrooms and controlled atmosphere environments.

The return filters are of the HEPA Absolute type and then a filter that guarantees the elimination of the maximum of contaminating particles of the worker's clothing. The cleaning is carried out by 16 addressable nozzles that blow approximately 20 m3/sec of clean air.

Interior with LED luminaires and emergency stop.

Program full automatic, programmable cleaning.

DETAILS



CHARACTERISTICS OF PERFORMANCE

AIR FLOW: 20 m3/sec
 FILTERED: MAX. 3,500,000 particles > 0.5µ / m3
 VOLTAGE: 3 x 380V
 POWER: 1.5 Kw
 ADAPTABLE AND AUTOMATIC CLEANING PROGRAM
 INTERNAL AND EXTERNAL EMERGENCY STOP
 DOOR LOCKING SYSTEM ADJUSTABLE

EXTERIOR DIMENSIONS
 HIGH: 2850 mm
 WIDTH: 900 mm
 DEPTH: 1200 mm
 Other dimensions on request
 WEIGHT: 400 kg
 DOOR WIDTH: 800 mm



AIR FILTRATION

The air is filtered through a first stage of prefiltration gravimetric efficiency class G4 (EU-4) according to EN779. Finally, it is filtered by the absolute filter class H-13 with efficiency 99.95% MPPS (particle size of greater penetration), according to EN 1822-1. Each air shower contains a 305x610x292mm filter.

FILTERING STAGE	CLASS	EFFICIENCY
PREVIOUS PHASE (PREFILTER)	G4	90-95% GRAVIMETRIC
FINAL PHASE (ABSOLUTE)	H13	99.95% MPPS

Absolute HEPA Filters

HEPA absolute filters are used for inlet and recirculation air filtration in ventilation systems such as: Air inlet (Clean Rooms, Operating Rooms, Laboratories, etc.), Industrial processes (Microelectronics industry, food, optical, pharmaceutical, fine chemicals, etc.), treatment of dangerous substances: asbestos, metallurgical dust, bacteria, viruses, radioactive particles.




PPE'S STERILIZATION CABINET

MODEL 7844UV



EXTERIOR DIMENSIONS:
 HIGH: 772 mm
 WIDTH: 600 mm
 DEPTH: 603 mm
 INTERNAL DIMENSIONS:
 HIGH: 619 mm
 WIDTH: 510 mm
 DEPTH: 567 mm

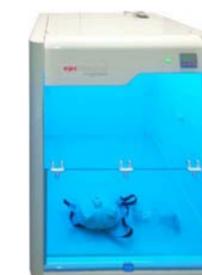

The three 15W ultraviolet light tubes and the inclusion of a timer allow complete sterilization of personal PPE'S as glasses, masks, hearing protectors that are deposited inside, avoiding possible contamination.

A 4mm thick tempered glass acts as a filter protecting personnel and the environment from exposure to UV radiation. In case of accidental opening of the front of the the cabin, UV lamps are automatically disconnected for full operator protection.

The 7844UV cab combines comfort of the work plane and curves that soften the environment and naturalize it. It is made in a single body with 1 shelf and plug & play operation, so you can start working in a matter of minutes.

VOLTAGE: 220V 50 Hz
 POWER: 63W

FIRE CABINET MODEL 7019BATA

TYPE 90 MINUTES - AUTOMATIC DOORS



Security cabinet manufactured according to the requirements of the UNE-EN 14470-1, with resistance to 90 min. fire, suitable for flammable liquids. Its 2 doors, have automatic closing at 50°C of temperature in the environment.

Constructed with double sheet metal wall and 70 mm insulation non-toxic high density insulation material. Equipped with automatic closing vents by temperature, 3 adjustable easy-clean collector shelves and 1 tray bottom collector. It has a lock with a security key.

Painted with epoxy paint, closet body white RAL 9010 and doors yellow RAL 1023

Its intumescent joints expand its volume 25 times to over of 100°C, and seal the cabinet hermetically.

Includes grounding.

OPTIONAL ACCESORIES



GAS EXTRACTOR
Ref. SP-300



PURIFIER OF ODORS
Ref. SP-400



ADDITIONAL SHELF
Ref. 6681



AUTOMATIC EXTINGUISHER
Ref. SP-500



SLIDING SHELF
Ref. 6698



HAND PALLET TRUCK SUPPLEMENT KIT
Ref. 6670

The fireproof cabinets are for use indoor.

For the calculation of the quantities to be stored in each cabinet, and the types of products that can be mixed within the same cabinet, consult the regulations of your region.



PRODUCTS FAMILY

DETAILS



Automatic closing system by temperature, with blocking open doors system.



Liquid collector shelves and lower collector tray.



Reinforced opening handle with security key.



Internal ventilation system with automatic closing by temperature.



External chimneys for connection of forced ventilation systems.



7019BATM



7029BATA



7029BATM

Model of 2 hinged doors with manual closing with 3 collector shelves and a lower collector tray.

One-door automatic swing door model with 3 collector shelves and a lower collector tray.

Model of 1 hinged door of manual closing with 3 collector shelves and a lower collector tray.

MODEL	HIGH	WIDTH	DEPTH	WEIGHT	SHELVES	INT. HIGH	INT. WIDTH	INT. DEPTH
7019BATA	1880 mm	1135 mm	615 mm	435 kg	3	1620 mm	1000 mm	410 mm
7019BATM	1880 mm	1135 mm	615 mm	420 kg	3	1620 mm	1000 mm	410 mm
7029BATA	1880 mm	635 mm	615 mm	277 kg	3	1620 mm	490 mm	410 mm
7029BATM	1880 mm	635 mm	615 mm	270 kg	3	1620 mm	490 mm	410 mm

FIRE CABINET MODEL 7039BATA

TYPE 90 MINUTES - AUTOMATIC DOORS



Security cabinet manufactured according to the requirements of the UNE-EN 14470-1, with resistance to 90 min. fire, suitable for flammable liquids.

Its 2 doors, have automatic closing at 50°C of temperature in the environment.

Constructed with double sheet metal wall and 70 mm insulation non-toxic high density insulation material.

Equipped with automatic closing vents by temperature, 2 adjustable easy-clean collector shelves and 1 tray bottom collector.

It has a lock with a security key.

Painted with epoxy paint, closet body white RAL 9010.

Its intumescent joints expand its volume 25 times to over of 100°C, and seal the cabinet hermetically.

Includes grounding.

OPTIONAL ACCESORIES



GAS EXTRACTOR
Ref. SP-300



PURIFIER OF ODORS
Ref. SP-400



ADDITIONAL SHELF
Ref. 6681



AUTOMATIC EXTINGUISHER
Ref. SP-500




SLIDING SHELF
Ref. 6698



HAND PALLET TRUCK SUPPLEMENT KIT
Ref. 6670

The fireproof cabinets are for use indoor.

For the calculation of the quantities to be stored in each cabinet, and the types of products that can be mixed within the same cabinet, consult the regulations of your region.

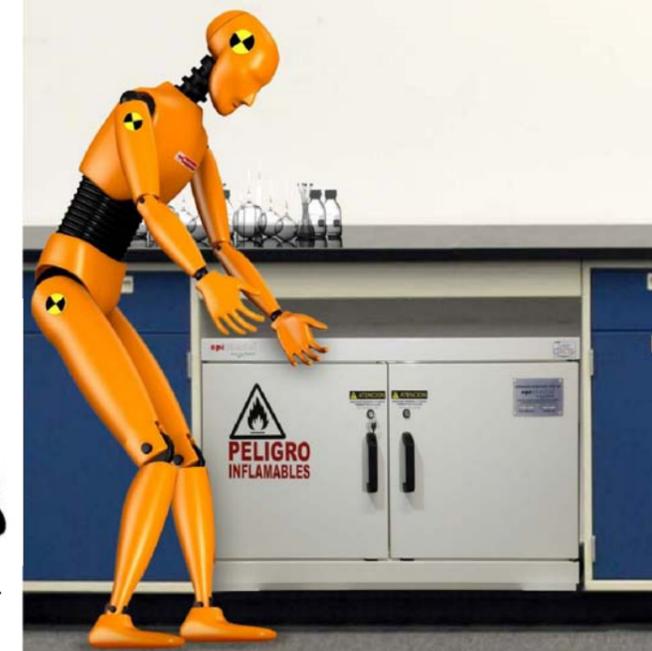

PRODUCTS FAMILY

DETAILS



Automatic closing system by temperature, with blocking open doors system.



Liquid collector shelves and lower collector tray.



Reinforced opening handle with security key.



Internal ventilation system with automatic closing by temperature.



External chimneys for connection of forced ventilation systems.



7039BATM



7059BATA



7059BATM



7049BATA

Model of 2 hinged doors with manual closing with 2 collector shelves and a lower collector tray.

Model of 2 hinged doors with automatic closing with 1 collector shelf and a lower collector tray.


Model of 2 hinged doors with manual closing with collector shelf and a lower collector tray.

Model of 1 hinged door with automatic closing with 1 collector shelf and a lower collector tray.

MODEL	HIGH	WIDTH	DEPTH	WEIGHT	SHELVES	INT. HIGH	INT. WIDTH	INT. DEPTH
7039BATA	1080 mm	1135 mm	615 mm	277 kg	2	820 mm	1000 mm	410 mm
7039BATM	1080 mm	1135 mm	615 mm	263 kg	2	820 mm	1000 mm	410 mm
7049BATA	670 mm	635 mm	615 mm	122 kg	1	460 mm	490 mm	380 mm
7059BATA	670 mm	635 mm	615 mm	203 kg	1	460 mm	1000 mm	380 mm
7059BATM	670 mm	635 mm	615 mm	190 kg	1	460 mm	1000 mm	380 mm

CONTAINERS FOR FLAMMABLE LIQUIDS


FIRE RESISTANCE REI-120



Structure built in galvanized steel and certified panels of 240 minutes of fire resistance and 120 mm thickness. Trailable floor of galvanized tramex that allows to walk on the anti-spill bucket.

Includes:
 Anti-spill cuvette
 2 certified reinforced swing doors REI-120
 Side vents for natural gas removal with closure automatic.
 Grounding system to avoid electrostatic charges.

OPTIONAL:
 Interior shelving
 Smoke detection system with alarm
 Indoor Temperature Control System (ATEX also available)
 Automatic Fire Extinguishment
 Interior lighting (ATEX also available)
 Outdoor lighting (ATEX also available)
 Forced ventilation (ATEX also available)
 Shower with eyewash (interior or exterior)

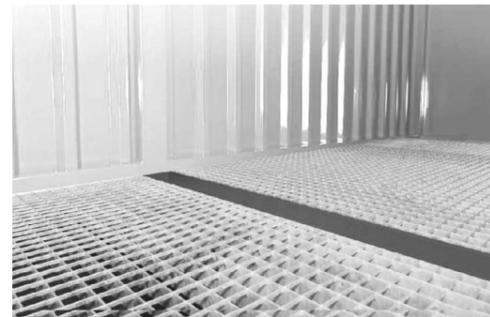

PRODUCTS FAMILY



FIREPROOF CONTAINER FOR 2 DRUMS
72800

Certified double door of 120 minutes of fire resistance. Trailable floor of galvanized tramex and anti-spill tank type pallet that allows to transport the drums.

Includes:
 Removable anti-spill bowl.
 Side vents for natural gas removal with automatic closure.
 Grounding system to avoid electrostatic charges.




FIREPROOF CONTAINER REFRIGERATED
73500FAER

Double sliding door that does not take place when opening them. Trailable floor of galvanized tramex and large volume antiderrame bucket.

Includes:
 Large volume spill tank.
 Cooling system for indoor temperature control.
 Side vents for natural gas removal with automatic closure.
 Grounding system to avoid electrostatic charges.

STORAGE IN ISOLATED AREAS AND HAZARDOUS PRODUCTS

RESISTANCE EI-90



Structure built in galvanized steel sheet coated in epoxy paint. Trailable floor of galvanized tramex that allows to walk on the antiderrame bucket.

Includes:
 Legs for handling with bull.
 Anti-spill cuvette.
 2 sliding doors that do not occupy place when opening.
 Galvanized access ramp.
 Side vents for natural gas elimination.

OPTIONAL:
 Interior shelving
 Smoke detection system with alarm
 Automatic Fire Extinguishment
 Interior lighting (ATEX also available)
 Outdoor lighting (ATEX also available)
 Forced ventilation (ATEX also available)
 Shower with eyewash (interior or exterior)



PRODUCTS FAMILY



CONTAINER FOR 2 IBC
72602

Container for 2 IBC, structure built in galvanized steel sheet. Trailable floor of galvanized tramex that allows to walk on the anti-spill bucket.

Includes:
 Legs for handling with bull.
 2 swing doors
 Side vents for natural gas elimination



CONTAINER FOR 4 IBC
72604

Container for 4 IBC, or 16 200Lts. drums in two levels, structure built-in galvanized steel sheet. Trailable floor of galvanized tramex that allows to walk on the anti-spill bucket.

Includes:
 Legs for handling with bull.
 2 swing doors
 Side vents for natural gas elimination

PVC CABINET

CORROSIVE PRODUCTS STORAGE MODEL 7610PLA



Ecological and anti-spill security cabinet to store chemical, corrosive, acid and base products.

Constructed entirely in self-extinguishing PVC category M1, and great resistance to chemical products, it does not contain metallic parts to prevent corrosion of them.

Its shelves are anti-spill and its roof has a practical anti-spill work area for safe handling of products.

OPTIONAL:

- SP-300 GAS EXTRACTOR
- SP-400 ODOR PURIFIER
- SP-500 AUTOMATIC EXTINGUISHER
- 6681 ADDITIONAL SHELF
- COLORED DOORSS



OPTION BLUE DOORS



OPTION YELLOW DOORS



DETAILS



Plastic hinges without maintenance by corrosion.



Completely plastic door closing system.



Practical roof with collector tray that allows work safely and without spills.

MODEL	HIGH	WIDTH	DEPTH	WEIGHT	SHELVES	INT. HIGH	INT. WIDTH	INT. DEPTH
7610PLA	1000 mm	850 mm	650 mm	70 kg	1	900 mm	760 mm	560 mm
7050BATM	1950 mm	1250 mm	520 mm	200 kg	4	1780 mm	1140 mm	405 mm
7045EVO	1600 mm	800 mm	600 mm	120 kg	3	1461 mm	406 mm	400 mm
7040EVO	1220 mm	600 mm	520 mm	71 kg	2	1082 mm	506 mm	420 mm
7304EVO	1500 mm	545 mm	653 mm	210 kg	4 DRAWERS			
7302EVO	825 mm	545 mm	653 mm	110 kg	2 DRAWERS			

FIRE CABINET FOR PAPER DOCS

MODEL 7050BATM WITH 2 DOORS



Safety cabinet with 2 hinged doors manufactured according to the requirements of standard UNE-EN-15659 suitable for paper documents.

Constructed with double 50 mm sheet metal wall and non-toxic high density insulating material insulation. With 4 adjustable shelves has lock with security key.

Painted with baked RAL 7035 gray paint.

It has intumescent joints that expand its volume 25 times to over than 100°C and seal the cabinet hermetically.



OPTIONAL ACCESSORIES



SLIDING SHELVES 6698



ELECTRONIC LOCK



FIRE-PROOF CASE 73010

PRODUCTS FAMILY



FIRE CABINET MODEL 7045EVO



FIRE CABINET MODEL 7040EVO



FIRE-PROOF FILE MODEL 7304EVO



FIRE-PROOF FILE MODEL 7302EVO

Model with 1 manual swing door with 3 adjustable shelves and security lock.

Model with 1 manual swing door with 2 adjustable shelves and security lock.

4 drawer model for hanging folders and security lock.

2 drawer model for hanging folders and security lock.

FIREMAN SUITS CABINET MODEL MODULO-1 FOR 2 FIREMAN SUITS



Cabinet for 2 Fireman Suits, 2 doors with windows of transparent methacrylate and embedded lock.
Specially designed to store and protect 2 Fireman suits, necessary for emergencies and firefighting.

Constructed with sheet metal wall 1.5 mm and painted with paint baked red color RAL 3000 high visibility.
Contains 1 shelf for small items, and tube for hangers.

EXTERIOR DIMENSIONS:


HIGH: 2000 mm

WIDTH: 900 mm

DEPTH: 400 mm

WEIGHT OF THE EMPTY CABINET: 50 Kg

SAFETY CABINET FOR PESTICIDES MODELO 77008



Security cabinet with 2-door, suitable for phytosanitary products according to RD 656/2017 and its APQ directives.

Built with quality sheet, 4 adjustable easy to clean collector shelves, 1 lower leak-proof collector tray and door lock with security key.

Painted with baked paint RAL 6011 green.

It has vents on the doors.

They are delivered with pictogram included

EXTERIOR DIMENSIONS:

HIGH: 1800 mm

WIDTH: 800 mm

DEPTH: 400 mm

WEIGHT OF THE EMPTY CABINET: 90 Kg



PRODUCTS FAMILY



CABINET FOR PPE's
MODEL MODULO-2

Metallic safety cabinet for Fire Brigades and Rescuers with 2 doors, suitable to store PPE's.

External Dimensions:
2000 x 900 x 400 mm
4 Shelves and lock with key
Doors with methacrylate visors.



SCBA CABINET
MODEL MODULO-3

Metal safety cabinet to store a self-contained breathing apparatus, with 1 door.

External Dimensions:
750 x 500 x 300 mm
1 hook to support the equipment and lock with key.
Door with methacrylate visor.



CABINET FOR PPE's
MODEL MODULO-4

Metallic safety cabinet with 1 door, suitable to store PPE's.

External Dimensions:
750 x 620 x 300 mm
2 Shelves and lock with key
Doors with methacrylate visors.



CABINET FOR PPE's
MODEL MODULO-5

Metallic safety cabinet with 1 door, suitable to store PPE's.

External Dimensions:
750 x 300 x 220 mm
2 Shelves and lock with key
Doors with methacrylate visors.

PRODUCTS FAMILY



EVACUATION PLANS CABINET
MODEL V-240

Metal cabinet to store the plans / evacuation plans required by the Firemen Department.
With 1 door with key and security viewer.

External dimensions:
510 x 380 x 200 mm



SPECIAL STORAGE CABINET
MODEL 77002

Metal 2-door safety cabinet suitable for products that must be kept away.

External dimensions:
1800 x 800 x 400 mm
4 Shelves and lock with key



SPECIAL STORAGE CABINET
MODEL 77003

Metal 1-door safety cabinet suitable for products that must be kept away.

External dimensions:
1800 x 600 x 400 mm
4 Shelves and lock with key



SPECIAL STORAGE CABINET
MODEL 77000

Metal 2-door safety cabinet suitable for products that must be kept away.

External dimensions:
900 x 900 x 400 mm
2 Shelves and lock with key


epi+técnica

EMERGENCY SHOWERS AND EYEWASH FIRE-PROOF CABINETS



Download the catalog in pdf format

Copyright 2018 Epitécnica Europa, SL
All rights reserved.
All photographs and texts
published on this page are
subject to copyright and
can not be used without authorization.
If you are interested in using any
of these images
or texts, please contact:
sales@epitecnica.com

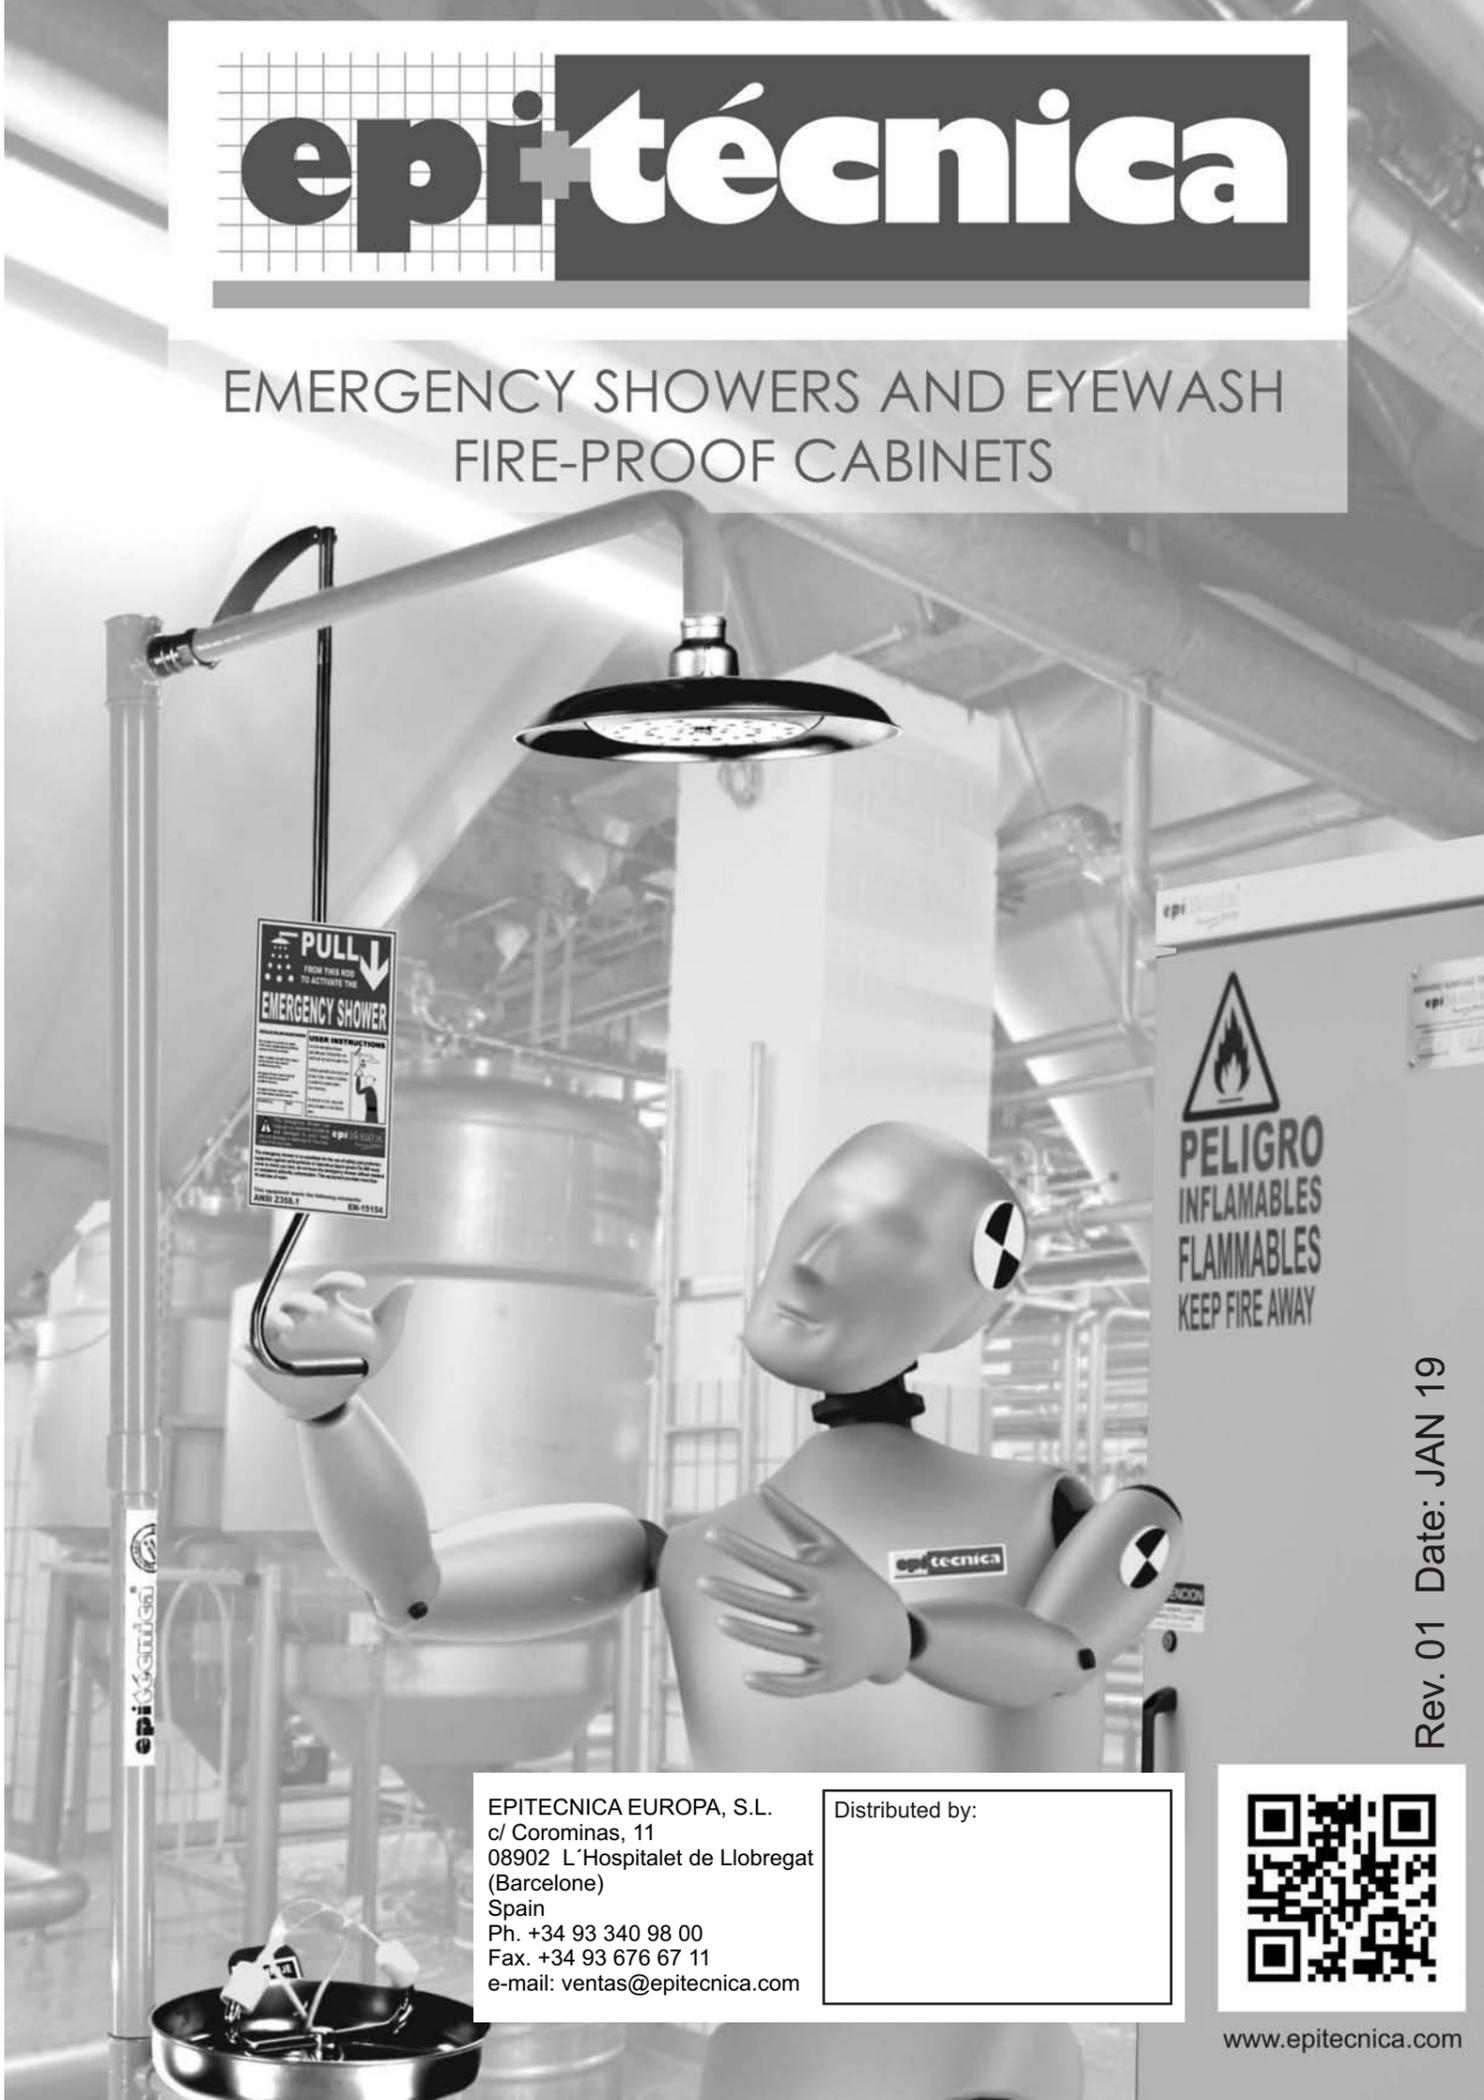

PULL ↓
FROM THIS SIDE
TO ACTIVATE THE
EMERGENCY SHOWER
USER INSTRUCTIONS
epi+tecnica
ANSI Z358.1 EN-15154

PELIGRO
INFLAMABLES
FLAMMABLES
KEEP FIRE AWAY

EPITECNICA EUROPA, S.L.
c/ Corominas, 11
08902 L'Hospitalet de Llobregat
(Barcelona)
Spain
Ph. +34 93 340 98 00
Fax. +34 93 676 67 11
e-mail: ventas@epitecnica.com

Distributed by:



Rev. 01 Date: JAN 19

www.epitecnica.com