

# MORNSUN®



**AC/DC Converter • DC/DC Converter • Isolation Transmitter  
IGBT Driver • LED Driver • EMC Auxiliary Device**

## Product Catalogue 2018



**MORNSUN®**

**MORE THAN RELIABILITY**



Headquarter in Guangzhou

# CONTENT

---

About MORN SUN.....	02-06
Part I Recommended selection of AC/DC converter for application environment.....	07-11
Part II Recommended selection of product line for application industry .....	12-17
Part III Product Lists.....	18-26
Part IV Pin-Out Details .....	27
Part V Product Specification.....	28-106
1 AC/DC Converter.....	28-45
2 DC/DC Converter.....	46-82
3 EMC Auxiliary Device.....	83-87
4 Industrial Bus Isolation Transceiver Module.....	89-92
5 Signal Conditioning Module .....	93-97
6 DC/DC Converter for IGBT Driver /IGBT Driver.....	98-101
7 LED Driver.....	102
8 Isolation Transmitter.....	103-106
Part VI Caution.....	107
Part VII Power Supply Testing.....	108-109
Part VIII Application Notes.....	110-121

**MORNSUN®** MORNSUN, a national high-tech enterprise headquartered in China, has grown into a leading vertical industrial power supply manufacturer.

Keeping the spirit of being forerunner, MORNSUN specializes in magnetic isolation technology and product research and application, and manufactures high-quality products include AC/DC converter, DC/DC converter, adapter, isolation transmitter, IGBT driver and LED driver , etc. most of which got UL, CE, CSA, CB and DoE Level VI certification.

As an IPR Demonstration Enterprises in Guangdong, MORNSUN is one of few power supply manufactures that have its own independent Intellectual Property Rights of integrated circuit, innovative transformer structure, assembly system and appearance design. Over the past 20 years, MORNSUN applied 300+ patents for inventions.

Guided by the service principle of "trust worthy", MORNSUN established its subsidiaries in America and Germany, expanded its distribution network in 40+ countries and operated sample inventory in Germany, North America, India, Japan and others to offer the best service to local clients in those locations.

As part of society, MORNSUN focuses on teamwork and persistent hard work, and it's deeply devoted to her role as a responsible corporate citizen around the world. Based on it, MORNSUN holds the core value of "creating value for her employees, clients, shareholders and developing our business to repay the society" and takes it as her mission to make contribution to the development of society and progress of the humankind by pursuing excellence unremittingly.

MORNSUN is marching a new silk road like a camel without any stop to realize new brilliant.



R&D Center in Guangzhou



Manufacturing Center in Huaihua

## Milestones

- 2017---Awarded "TOP 500 Manufacturing enterprise in Guangdong Province" for 2 years in a row(2016-2017)
- 2017---Awarded Sci-Tech Awards by CHINA POWER SUPPLY SOCIETY for 3 times in a row (2013-2017, biennial event)
- 2017---Awarded "TOP 10 Power Supply Product" for 6 years in a row (2012-2017)
- 2017---Awarded "Guangdong Outstanding Export Enterprise 2017"
- 2017---Awarded "Best Employer of China" for 4 years in a row (2013-2017)
- 2017---Awarded "Intellectual Property Mayor award in Guangzhou"
- 2017---Established Mornsun Power GmbH in Germany
- 2017---Awarded "IPR Demonstration Enterprises in Guangdong 2017"
- 2017---Acquired "Guangdong Provincial Enterprise Technology Center" approval
- 2017---Member of the Product Safety Standards Working Group (under Ministry of Industry and Information Technology) and of drafting compulsory GB4943.1 standard and amending IEC62368-1 draft
- 2016---Completed the certification of GB/T29490-2013 Enterprise IPR Management
- 2016---Awarded "Top 100 Innovative Enterprise in Guangdong"
- 2016---Awarded "To 20 Enterprise of Patent Creating in Development Zone" for 5 years in a row (2012-2016)
- 2016---Awarded "Guangdong Golden Award of Patent"
- 2015---Awarded "Guangdong Engineering Technology Research Center of Industrial Power Supply Module "
- 2015---Awarded "Well-Known Trademark" in Guangdong
- 2014---High frequency switching DC power source awarded "Well-Known Product" in Guangdong
- 2014---Purchased Mornsun Guangzhou R&D center building
- 2013---Drafted Fixed voltage input and Unregulated output isolated DC-DC model power supply, standard number (pending): Energy 20130817
- 2012---Drafted Wide voltage input and regulated output isolated DC-DC model power supply, standard number NB/T 42039-2014, which goes into effect from Nov. 1 2014
- 2012---Ranked the top 18th of 100 most potential private companies by Forbes China
- 2012---Awarded "Most Satisfactory Employer of China 2012" under the Hi-Tech category
- 2011---Established Mornsun Huaihua manufacturing center
- 2010---Moved to MORNSUN new headquarter building in Guangzhou Science City
- 2008---Established Mornsun America, LLC in MA, USA
- 2003---Awarded "High-tech Enterprise"
- 2001---Implemented informational management system
- 1998.07---Established MORNSUN in Guangzhou, China

# One-stop solutions of industrial power supplies

## ▶ Professional Technology & International Standard

- 600+ patents and IPR: power circuit topology, transformer structures, assembling technology and etc;
- Drafted the standard *NB/T 42039-2014* and *Energy 20130817*;
- International standard pin-out and SMD package with convenient design and automatic manufacturing process.

## ▶ 360° Professional Support

- Professional selection guide : 'Choose the product that works';
- Precise trading: Nearly 100% OTD and door-to-door delivery which reduce customers' cost and risks;
- 360° professional support: Fast response within 48hrs, routine visit, technical communication and discussion.

## ▶ Reliability Ensured throughout the whole manufacturing process

- Seven platforms ensuring the reliability and controllability for the whole process from R&D, manufacturing to marketing;
- Seven platforms: Technology management platform, Material management platform, Failure analysis platform, Manufacturing platform, Process control platform, Personnel training platform, Service platform.



### Notes:

NB/T 42093-2014: Wide voltage input and regulated output isolated DC-DC model power supply

Energy 20130817: Fixed voltage input and unregulated output isolated DC-DC model power supply



Automatic SMT clean room

## Certifications



REACH



## Key to the Reliability

Power supply is the heart of industrial equipment. What customers concern most is not the price, the function or the efficiency, but the reliability of the power supply. In other words, it must not break down especially in various extreme situations.

It is easy to guarantee the function of the power supply, but not for the reliability, particularly the reliability of the power supply under harsh conditions. The reliability can only be achieved by a perfect management system which consists of advanced research technology, high-quality raw material platform, advanced equipment, excellent manufacturing process management, specialized screening sequence on reliability and rich experience.

Meanwhile, the reliability of products depends on not only design and manufacturing but also customers' proper operation. Therefore, MORNSUN FAE team are ready to offer professional technical support to customers to enhance the reliability.

Therefore, improving the reliability of the products is not a simple task but a rather complex system.

To meet customers demand and expectation, MORNSUN spends much time and money to improve the power supply reliability. In 2007, MORNSUN established the power supply reliability system project and brought in 7 platforms to improve the reliability of MORNSUN products in the following 11 years, including Technology management platform, Material management platform, Failure analysis platform, Manufacturing platform, Process control platform, Personnel training platform, Service platform.. Thanks to these platforms, MORNSUN makes significant breakthroughs in all existing products and develops R3 DC-DC Converter with higher reliability and upgraded performance.

"No pain, no gain." The reliability can only be achieved by earnest, meticulous work, step by step, which is consistent with MORNSUN's Camel Culture. In conclusion, MORNSUN's meticulous and systemic work makes products reliable .




Automatic workshop


## Systems

IATF16949 ISO9001 ISO14001 OHSAS18001

### MORNSUN's TQA System Architecture

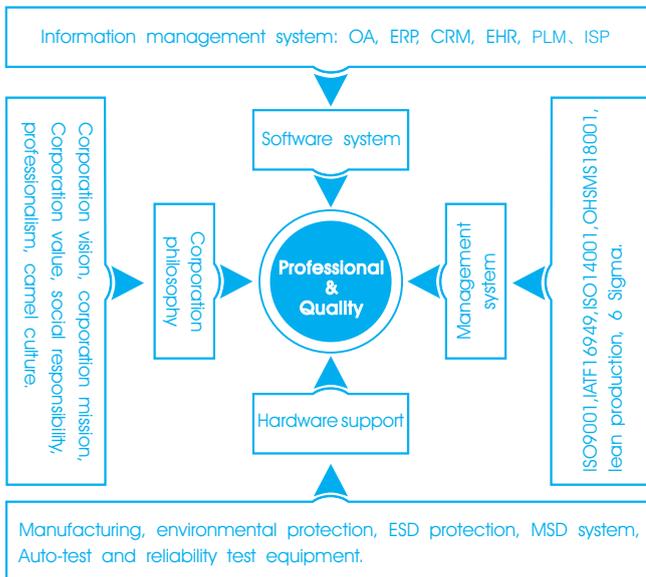

### Reliability Assurance

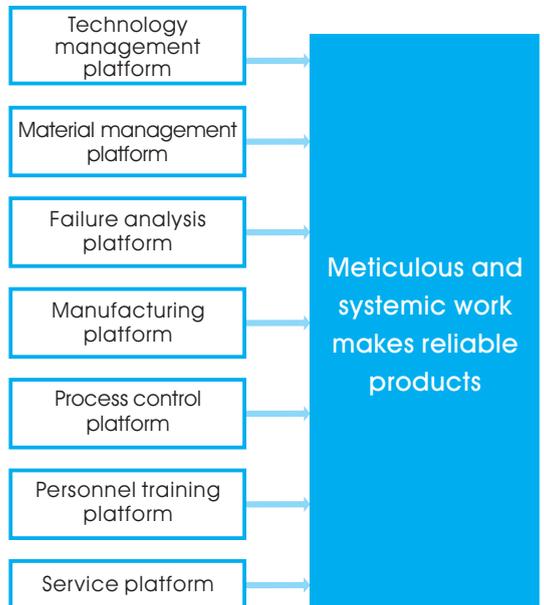

# Recommended Selection of AC/DC Converter for Application Environment

## Causes and basis for classification

### Cause:

AC/DC converter can be used in various applications which are complicated and volatile in practical application, such as commercial, industrial and military environment. Whereas many people do not take the requirement and impact of environment to product performance into consideration and misunderstand that AC/DC converter can be used in all environment; which may cause:

- 1.Redundant performance results in increased system cost which further weaken its market competitiveness.
- 2.Inadequate performance results in damage to system or even cause it unable to work normally

So it does matter that "Choose the product that works". To make the most optimal choice for performance, price and reliability, the assessment and classification of practical application environment is needed; which can avoid traps and over design.

### Basis:

The characteristics of system operation, change range of environment temperature, requirement of industry standard for power supply in performance and certification.

## Commercial Indoor Environment

- Operation environment: intermittent power supply mode, system runs on standby for most of the time
- Environment temperature: -10°C to +40°C
- Performance requirement: EMI meets CLASS B
- Applications: household appliances, consumer electronics, office equipments



Suitable for smart home, household appliances

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
LS01-15BxxSS(-F)	1W	85-305VAC/70-430VDC	5,9,12,15,24	RoHS cFUS CE CB	29
LS03-15BxxSR2S(-F)	3W	85-305VAC/70-430VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB	29
LS05-15BxxSS(-F)	5W	85-264VAC/100-400VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB	29

## Industrial Indoor Environment

- Operation environment: system runs without interruption
- Environment temperature: -25 to +71°C
- Performance requirement: EMI meets CLASS B
- Application: intelligent building, building monitoring



Suitable for intelligent building, smart agriculture

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
LDE03-20B	3W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB (pending)	32
LDE05-20B	5W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB (pending)	32
LDE06-20B	6W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB (pending)	32
LDE10-20B	10W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB (pending)	32
LDE15-20B	15W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB (pending)	32
LDE20-20B	20W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB (pending)	32
LD01-10B	1W	85-305VAC/120-430VDC	3,3,5,9,12,15,24	RoHS cFUS CE	34
LD02-10B	2W	85-305VAC/120-430VDC	3,3,5,9,12,15,24	RoHS cFUS CE	34
LD03-10BxxR2	3W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB (pending)	33
LD03-16B	3W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB	31
LD05-20B	5W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS cFUS CE (pending)	33
LD05-23B	5W	85-305VAC/100-430VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB	34
LD10-20B	10W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS cFUS CE	33
LS05-26BxxSS(-F)	5W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS cFUS CE CB (pending)	30

Series	Power	Input Voltage Range	Output Available (Vo1/Vo2/Vo3)	Output Available (Vo4/Vo5)	Output Available (Vo6/Vo7)	Certification	Page
LO10-10J	10W	85-264VAC/120-370VDC	Triple outputs available (3.3V-24V)	Positive and negative voltage available (±5V to ±24V)	Positive and negative voltage available (±5V to ±70V)	RoHS	42

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# Recommended Selection of AC/DC Converter for Application Environment

## Suitable for intelligent building, smart agriculture

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
LD10-13B	10W	85-305VAC/122-430VDC	3.3,5,9,12,15,24	RoHS	34
LD12-20B	12W	85-264VAC/100-370VDC	3.3,5,12,15,24	RoHS   	33
LD20-10B	20W	85-264VAC/100-370VDC	3.3,5,12,15,24	RoHS   	33
LD10-26B	10W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS  (pending)	31
LD20-26B	20W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS  (pending)	31

## Special Industrial Indoor Environment

- Operation environment: closed to or direct connect/contact with human body
- Environment temperature: -25 to +71°C
- Performance requirement: EMI meets CLASS B, typical application or certification requirements
- Application: medical



## Suitable for medical equipment

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
LD05-20BxxMU	5W	85-264VAC/100-370VDC	5,12,15,24	RoHS   	41
LD10-20Bxx	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS   	33
LH15-20BxxMU	15W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS    	41
LH25-20BxxMU	25W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS    	41

## Industrial Outdoor Environment

- Operation environment: system runs without interruption
- Environment temperature: -40 to +71°C
- Performance requirement: EMS meets level 3
- Application: intelligent transportation, communication, video surveillance, charging station, agriculture and animal husbandry



## Suitable for intelligent transportation, video surveillance, charging station

Series	Power	Input Voltage Range (VDC)	Output Voltage (Vo1)	Output Voltage (Vo2)	Certification	Page
LS03-16BxxSS(-F)	3W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	/	RoHS    	30
LO10-24B	10W	30-280VAC/30-400VDC	5,12,13	/	RoHS	42
LO10-26D0512-04L	10W	57-528VAC/80-745VDC	5.1	12	RoHS	43
LO15-26D1212/26D1305-03	15W	57-528VAC/80-745VDC	12,13,5	5,12	RoHS	43
LO20-10C0512-01	18.7W	165-264VAC/230-370VDC	5	±12	RoHS	43
LO30-10C0512-12	31.2W	85-264VAC/100-370VDC	5	±12	RoHS	43
LH10/15/25-10B/DxxER2	10W,15W,25W	85-264VAC/100-370VDC	5,12,15,24	5,12,24	RoHS    	44
LH120-10B	120W	85-264VAC/120-370VDC	12,24,48	/	RoHS    	40
LH240-10B	240W	85-264VAC/120-370VDC	24,48	/	RoHS    	40
LM30-00J0512-03E	30W	85-264VAC/100-370VDC	5	±12,24	RoHS	40
LHE05-20B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS     (pending)	36
LHE10-20B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS     (pending)	36
LHE15-20B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS     (pending)	36
LHE20-20B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS     (pending)	36
LHE25-20B	25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	/	RoHS     (pending)	36
LH05-10B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS   	37
LH05-10A	5W	85-264VAC/100-370VDC	+5,+12,+15,+24	-5,-12,-15,-24	RoHS	37
LH05-10C	5W	85-264VAC/100-370VDC	5	±5,±12,±15,±24	RoHS	37
LH05-10D	5W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	37
LH10-10B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS   	37
LH10-10A	10W	85-264VAC/100-370VDC	+5,+12,+15,+24	-5,-12,-15,-24	RoHS   	37

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

# Recommended Selection of AC/DC Converter for Application Environment

## Industrial Outdoor Environment



Suitable for intelligent transportation, video surveillance, charging station

Series	Power	Input Voltage Range (VDC)	Output Voltage (Vo1)	Output Voltage (Vo2)	Certification	Page
LH10-10C	10W	85-264VAC/100-370VDC	5	±12, ±15	RoHS	37
LH10-10D	10W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS cULus CE	37
LH15-10B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS cULus CE CB	37
LH15-10A	15W	85-264VAC/100-370VDC	+5, +12, +15, +24	-5, -12, -15, -24	RoHS	37
LH15-10C	15W	85-264VAC/100-370VDC	5	±5, ±12, ±15, ±24	RoHS cULus CE CB	37
LH15-10D	15W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	37
LH20-10B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS cULus CE CB	37
LH20-10A	20W	85-264VAC/100-370VDC	+5, +12, +15	-5, -12, -15	RoHS	37
LH20-10C	20W	85-264VAC/100-370VDC	5	±5, ±12, ±15, ±24	RoHS cULus CE CB	37
LH20-10D	20W	85-264VAC/100-370VDC	5	12,15,24	RoHS cULus CE CB	37
LH25-10B	25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	/	RoHS cULus CE CB	37
LH40-10B	40W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS cULus CE	39
LH40-10A	40W	85-264VAC/100-370VDC	+5, +12, +15	-5, -12, -15	RoHS	39
LH40-10D	40W	85-264VAC/100-370VDC	5	12,24	RoHS	39
LH60-20B	60W	90-264VAC/122-370VDC	5,9,12,15,24,48	/	RoHS cULus CE	39



Suitable for communication and security

Series	Power	Load Voltage/Current	Floating charging voltage/ Charging current	Certification	Page
MBP500-2A27D27L	162W(540W/30s,702W/1s)	27V/4.5A	27V/1.5A	RoHS	45
MBP500-2A54D54L	135W(540W/30s,702W/1s)	54V/1A	54V/1.5A	RoHS	45

Series	Power	Input Voltage Range (VDC)	Output Voltage (Vo1)	Output Voltage (Vo2)	Certification	Page
LH05-10B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS cULus CE	37
LH05-10A	5W	85-264VAC/100-370VDC	+5, +12, +15, +24	-5, -12, -15, -24	RoHS	37
LH05-10C	5W	85-264VAC/100-370VDC	5	±5, ±12, ±15, ±24	RoHS	37
LH05-10D	5W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	37
LH10-10B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS cULus CE	37
LH10-10A	10W	85-264VAC/100-370VDC	+5, +12, +15, +24	-5, -12, -15, -24	RoHS cULus CE	37
LH10-10C	10W	85-264VAC/100-370VDC	5	±12, ±15	RoHS	37
LH10-10D	10W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS cULus CE	37
LH15-10B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS cULus CE CB	37
LH15-10A	15W	85-264VAC/100-370VDC	+5, +12, +15, +24	-5, -12, -15, -24	RoHS	37
LH15-10C	15W	85-264VAC/100-370VDC	5	±5, ±12, ±15, ±24	RoHS cULus CE CB	37
LH15-10D	15W	85-264VAC/100-370VDC	5	5,12,15,24	RoHS	37
LH20-10B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS cULus CE CB	37
LH20-10A	20W	85-264VAC/100-370VDC	+5, +12, +15	-5, -12, -15	RoHS	37
LH20-10C	20W	85-264VAC/100-370VDC	5	±5, ±12, ±15, ±24	RoHS cULus CE CB	37
LH20-10D	20W	85-264VAC/100-370VDC	5	12,15,24	RoHS cULus CE CB	37
LH25-10B	25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	/	RoHS cULus CE CB	37
LH40-10B	40W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS cULus CE	39
LH40-10A	40W	85-264VAC/100-370VDC	+5, +12, +15	-5, -12, -15	RoHS	39
LH40-10D	40W	85-264VAC/100-370VDC	5	12,24	RoHS	39
LH60-20B	60W	90-264VAC/122-370VDC	5,9,12,15,24,48	/	RoHS cULus CE	39

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# Recommended Selection of AC/DC Converter for Application Environment



## Suitable for agriculture and animal husbandry

Series	Power	Input Voltage Range (VDC)	Output Voltage (Vo1)	Output Voltage (Vo2)	Certification	Page
LD10-13B	10W	85-305VAC/122-430VDC	3.3,5,9,12,15,24	/	RoHS	34
LH05-13B	5W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	/	RoHS cFUS CE CB	35
LH10-13B	10W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	/	RoHS cFUS CE CB	35
LH15-13B	15W	85-305VAC/100-430VDC	3.3,5,9,12,15,24,48	/	RoHS cFUS CE CB	35
LH20-13B	20W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	/	RoHS cFUS CE CB	35
LH25-13B	25W	85-305VAC/100-430VDC	3.3,5,9,12,15,24,48	/	RoHS cFUS CE CB	35
LH40-10B	40W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	/	RoHS cFUS CE	39
LH40-10A	40W	85-264VAC/100-370VDC	+5, +12, +15	-5, -12, -15	RoHS	39
LH40-10D	40W	85-264VAC/100-370VDC	5	12,24	RoHS	39
LH60-20B	60W	90-264VAC/122-370VDC	5,9,12,15,24,48	/	RoHS cFUS CE	39

## Special Industrial Outdoor Environment(Harsh Environment)

- Operation environment: large fluctuation in input voltage, system runs without interruption, suitable for outdoor applications with high/low temperature, high humidity, high pollution or strong noise interference
- Environment temperature: -40 to +85°C
- Performance requirement: EMS meets level 4, wide and high input voltage
- Application: roadside equipment, electricity, environment monitoring, communication base



## Suitable for roadside equipment

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
LHE05-20B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS cFUS CE CB (pending)	36
LHE10-20B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS cFUS CE CB (pending)	36
LHE15-20B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS cFUS CE CB (pending)	36
LHE20-20B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS cFUS CE CB (pending)	36
LHE25-20B	25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	RoHS cFUS CE CB (pending)	36



## Suitable for environment monitoring, communication base

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
LHE05-20B	5W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS cFUS CE CB (pending)	36
LHE10-20B	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS cFUS CE CB (pending)	36
LHE15-20B	15W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS cFUS CE CB (pending)	36
LHE20-20B	20W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS cFUS CE CB (pending)	36
LHE25-20B	25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24,48	RoHS cFUS CE CB (pending)	36



## Suitable for electricity

Series	Power	Load Voltage/Current	Floating charging voltage/ Charging current	Certification	Page
MCP100-2A27D27	100W	27V/1.5A	27V/3A	RoHS	45
MBP300-2A27D27	108W(350W/30s,432W/1s)	27V/3A	27V/1A	RoHS	45
MBP500-2A27D27L	162W(540W/30s,702W/1s)	27V/4.5A	27V/1.5A	RoHS	45
MBP500-2A54D54L	135W(540W/30s,702W/1s)	54V/1A	54V/1.5A	RoHS	45
MBP300-2A27D27220	62.5W(340W/20s)	27V/1A,220V/0.1A	27V/0.5A	RoHS	44
MBP300-2A27D27M	300W(350W/30s,432W/1s)	27V/1A	27V/0.5A	RoHS	45

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

# Recommended Selection of AC/DC Converter for Application Environment

## Special Industrial Outdoor Environment(Plateau)

- Operation environment: large fluctuation in input voltage, suitable for high-altitude applications ( up to 2000 meters )
- Environment temperature: -40 to +71°C
- Performance requirement: EMS meets level 4, wide and high input voltage range, good heat dissipation and high reliability
- Application: electricity, environment monitoring



Suitable for electricity

### 100-1500VDC Ultra-wide Input Voltage DC/DC Converter

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
PV05-27BxxR2	5W	100-1000	5	RoHS CE	47
PV10-27BxxR2	10W	100-1000	5,9,24	RoHS CE	47
PV15-27BxxR2	15W	100-1000	12,15,24	RoHS CE	47
PV40-27B	40W	200-1200	12,15,24	RoHS	47
PV15-29B	10W,15W	200-1500	5,12,15,24	RoHS CE	48
PV15-29BxxL	10W,15W	200-1500	5,12,15,24	RoHS	48
PV40-29B	40W	200-1500	12,15,48	RoHS CE	48
PV45-29D	45W	150-1500	12V/15V/24V double outputs customization acceptable	RoHS	48
PV200-27Bxx	200W	200-1000	12,15,24,26,48	RoHS CE	49
PV200-29Bxx	200W	300-1500	24,48	RoHS CE	49

# Recommended Product Line for Applications



## Industrial Control



## Inverter & Motor Drive and Control System

Series	Nominal Input Voltage(VDC)	Input Voltage Range(VDC)	Positive Output (VDC)	Negative Output (VDC)	Output Current (mA)	Efficiency	Isolation	Certification	Page
QA01	15	14.5-15.5	+15	-8.7	+80/-40	80%	3000VAC	RoHS c    CB CE	98
QA02	12	11.6-12.4	+15	-8.7	+80/-40	80%	3000VAC	RoHS c    CB CE	98
QA03	24	23.3-24.7	+15	-8.7	+80/-40	80%	3000VAC	RoHS c    CB CE	98
QA04	12	9-15	+15	-8	+100/-80	80%	3000VAC	RoHS c    CB CE	98
QA01C	15	13.5-16.5	+20	-4	+100/-100	83%	3500VAC	RoHS c    CB CE	99
QAW01	12	9-18	+15	-9	+200/-200	85%	3000VDC	RoHS	99
QAW02	24	18-36	+15	-9	+200/-200	85%	3000VDC	RoHS	99
QA152D	15	13.5-16.5	+15	-9	+200/-200	87%	4000VAC	RoHS CE	99
QA156D-24	15	13.5-16.5	+24	/	150/15	80%	12000VDC	RoHS CE	99
QA121	12	11.4-12.6	+15	-8	+120/-120	81%	3000VAC	RoHS	98
QA151	15	14.25-15.75	+15	-8	+120/-120	81%	3000VAC	RoHS	98
QA241	24	22.8-25.2	+15	-8	+120/-120	81%	3000VAC	RoHS	98
CQAW01	12	7-18	+15	-9	+200/-200	83%	3000VDC	RoHS	100

Series	Input Voltage (VDC)	Input Voltage Range(VDC)	Output High-level Voltage VOH(VDC)	Output Low-level Voltage VOL(VDC)	Max. Driving Current (A)	Max.Frequency (KHz)	Isolation	Certification	Page
QP12W08S-37	15	14.5-15.5	15	-9	±8	20	3750VAC	RoHS	100

Series	Positive input Voltage (VDC)	Negative input Voltage (VDC)	Output High-level Voltage VOH (VDC)	Output Low-level Voltage VOL (VDC)	Max. Driving Current (A)	Max.Frequency (KHz)	Isolation	Certification	Page
QC962-8A	15	-10	14	-9	±8	40	3750VAC	RoHS	101



## Robot

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
URB-LD-20WR3	20W	9-36,18-75	3,3,5,9,12,15,24	RoHS c    CE CB	77
URB-LD-30WR3	30W	9-36,18-75	3,3,5,9,12,15,24	RoHS c    CE CB	79
VRB-LD-50W	50W	18-36,36-75	3,3,5,12,15,24	RoHS CE	79
URF-QB-100WR3	100W	18-75	5,12,15,24,48	RoHS CE	80
URF-QB-200WR3	200W	18-75	5,12,15,24,48	RoHS CE	80



## DCS & PLC & SCADA

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LH-10B	5W,10W,15W,20W,25W	85-264VAC/100-370VDC	3,3,5,9,12,15,24,48	RoHS c    CE	37
LH-13B	5W,10W,15W,20W,25W	85-305VAC/100-430VDC	3,3,5,9,12,15,24,48	RoHS c    CE CB	35
LH40-10B	40W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RHS c    CE	39
LH60-20B	60W	90-264VAC/122-370VDC	5,9,12,15,24,48	RoHS c    CE CB	39

Series	Power	Input Voltage Range(VDC)	Output Voltage (VDC)	Certification	Page
WRA_S-1WR2/3WR2	1W,3W	4.5-9,9-18,18-36,36-75	±5,±9,±12,±15,±24	RoHS CE	64,66
WRB_S-1WR2/3WR2	1W,3W	4.5-9,9-18,18-36,36-75	3,3,5,9,12,15,24	RoHS CE	64,66

# Recommended Product Line for Applications



## DCS & PLC & SCADA

Series		Power Supply	Data Rate	Certification	Page
TD321/521D485	Single RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	19.2Kbps	RoHS CE	89
TD321/521D485H	Single high-speed RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	200Kbps	RoHS CE	89
TD321/521D485H-A	Single high-speed RS485 isolated transceiver module (automatic switching)	3.15-3.45, 4.75-5.25VDC	500Kbps	RoHS CE	89
TD321/521D485H-E	Single high-speed RS485 isolated transceiver module (enhanced)	3.15-3.45, 4.75-5.25VDC	500Kbps	RoHS CE	89
TD322/522D485H-A	Dual channel RS485 transceiver(automatic switching)	3.15-3.45, 4.75-5.25VDC	120Kbps	RoHS CE	89
TD321/521S485	SMD Single RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	19.2Kbps	RoHS CE	89
TD321/521S485H	SMD Single high-speed RS485 isolated transceiver module	3.15-3.45, 4.75-5.25VDC	200Kbps	RoHS CE	89
TD321/521S485H-A	SMD Single high-speed RS485 isolated transceiver module (automatic switching)	3.15-3.45, 4.75-5.25VDC	500Kbps	RoHS CE	89
TD321/521S485H-E	SMD Single high-speed RS485 isolated transceiver module (enhanced)	3.15-3.45, 4.75-5.25VDC	500Kbps	RoHS CE	89
TD321/521DCAN	Single universal CAN isolation transceiver module	3.3,5VDC	5K-1Mbps	RoHS CE	90
TD321/521DCANH	Single high rate CAN isolation transceiver module	3.3,5VDC	40K-1Mbps	RoHS CE	90
TD321/521SCAN	SMD Single universal CAN isolation transceiver module	3.3,5VDC	5K-1Mbps	RoHS CE	90
TD321/521SCANH	SMD Single high rate CAN isolation transceiver module	3.3,5VDC	40K-1Mbps	RoHS CE	90
TD322/522DCAN	Duplex High Rate Isolation CAN Transceiver Module	3.3,5VDC	40K-1Mbps	RoHS CE	90
TD301/501MCAN	Single high speed Compact size CAN isolation transceiver module	3.3,5VDC	40K-1Mbps	RoHS CE	90
TD301/501MCANFD	Single high speed Compact size CANFD isolation transceiver module	3.3,5VDC	40K-5Mbps	RoHS CE	90
TD301/501DCANHE	High Surge Protective Isolated CAN transceiver	3.3,5VDC	40K-1Mbps	RoHS	90
TD301/501D232H	Single high speed RS232 isolation transceiver	3.0-3.6, 4.5-5.5VDC	0-115.2Kbps	RoHS	92
TD302/502D232H	Dual high speed RS232 isolation transceiver	3.0-3.6, 4.5-5.5VDC	0-115.2Kbps	RoHS	92
TLAxx-03K485	Integrated isolated 485 ACDC power supply	85-305VAC/100-430VDC	500Kbps	RoHS	91
TLAxx-03KCAN	Integrated isolated CAN ACDC power supply	85-305VAC/100-430VDC	5-1000Kbps	RoHS	91

Series	Function	Input Signal	Output Signal	Isolation	Certification	Page
TE_N	Active module	0-5V,0-10V,4-20mA	0-5V,0-10V	2000VAC	RoHS CE	93
TE_AN	Active module positive and negative signal	±5V, ±10V	0-5V,0-10V	2000VAC	RoHS CE	93
TE_CN	Active module positive and negative signal	±5V, ±10V	±5V, ±10V	2000VAC	RoHS CE	93
TEM_AN	Active, mV-class, positive and negative signal	±75mV/±100mV	0-5V	2000VAC	RoHS CE	93
TEM_CN	Active, mV-class, positive and negative signal	±50mV/±100mV/±200mV	±5V/±10V	2000VAC	RoHS CE	93
TE_HN	Active high precision high isolated detection type signal	0-5V	0-5V	4000VAC	RoHS	98
TF_N	Active module	0-5V,0-10V	0/4-20mA,0-5V,0-10V	2000VAC	RoHS CE	94
TF_GN	Active module	0-5V	±10V	2000VAC	RoHS CE	94
TFW_N	Active High Precision PWM Signal	5V	0-20mA,0-10V	2000VAC	RoHS CE	94
T_P	Active module	0/4-20mA,0/1-5V,0-10V	0/4-20mA,0-5V,0-10V	2500VDC	RoHS	96
T_CP	Active high precision signal	±5V, ±10V	±5V/±10V, ±20mA	2500VDC	RoHS	96
TM_P	Active high precision signal (mV-class)	0-10/30/50/75/100mV	0/4-20mA,0-5V,0-10V	2500VDC	RoHS	95
TM_CP	Active high precision signal (mV-class)	±10/±20/±50/±75/±100mV/±200mV	±5V/±10V	2500VDC	RoHS	95
T1100N	Passive module	4-20mA	4-20mA	3000VDC	RoHS CE	96
T1100L	Passive module	4-20mA	4-20mA	3000VDC	RoHS CE	96
T1100L-F	Passive module(loop power supply)	4-20mA	4-20mA	3000VDC	RoHS CE	96
T_HL	Two-wire Self-Powered module with HART	0-2.5V	3.7-22mA	2000VAC	RoHS CE	97
T_L	Two-wire loop power supply	0-2.5V	3.7-22mA	2000VAC	RoHS CE	97
TRP_P	RTDs detection type isolated module	Pt100(0-200°C)	4-20mA	2000VAC	RoHS CE	97

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# Recommended Product Line for Applications



## Instrumentation

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LS01-15BxxSS(-F)	1W	85-305VAC/70-430VDC	5,9,12,15,24	RoHS	29
LS03-15BxxSR2S(-F)	3W	85-305VAC/70-430VDC	3,3,5,9,12,15,24	RoHS	29
LS03-16BxxSS(-F)	3W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS	30
LD03-16B	3W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS	31
LS05-15BxxSS(-F)	5W	85-264VAC/100-400VDC	3,3,5,9,12,15,24	RoHS	29
LS05-26BxxSS(-F)	5W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS    (pending)	30
B_LS-1WR2/B_LS-1WR3	1W	3,3,5,12,15,24VDC	3,3,5,9,12,15,24,60	RoHS	51,54
A_XT-1WR2/A_XT-1WR3	1W	3,3,5,12,15,24VDC	±5, ±9, ±12, ±15, ±24	RoHS	56
B_XT-1WR2/B_XT-1WR3	1W	3,3,5,12,15,24VDC	3,3,5,6,9,12,15,24	RoHS	56
A_S-2WR2	2W	5,12,15,24VDC	±3,3, ±9, ±5, ±12, ±15	RoHS	58
B_S-2WR2	2W	5,12,15,24VDC	3,3,5,9,12,15,24	RoHS	58



## Renewable Energy



### TLS-CB & PV Inverter & Wind Energy Converter & UHV Power Transmission & SVG

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
PV05/10/15-27BxxR2	5W,10W,15W	100-1000	5,9,12,15,24	RoHS	47
PV40-27B	40W	200-1200	12,15,24	RoHS	47
PV45-29D	45W	150-1500	12,15,24 double outputs available	RoHS	48
PV15/40-29B	10W,15W,40W	200-1500	5,12,15,24	RoHS	48
PV15-29BxxL	10W,15W	200-1500	5,12,15,24	RoHS	48
PV200-27Bxx	200W	200-1000	12,15,24,26,48	RoHS	49
PV200-29Bxx	200W	300-1000	24,48	RoHS	49



## Protective Relaying System

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LM30-00J0512-03E	30W	85-264VAC/100-370VDC	5/±12/24	RoHS	40
G_S-2WR2	2W	5,12,15,24VDC	±5, ±9, ±12, ±15	RoHS	52
H_S-2WR2	2W	5,12,15,24VDC	5,12,15	RoHS	52
LH10/15/25-10B/DxxER2	10W,15W,25W	85-264VAC/100-370VDC	5,12,15,24	RoHS	44



## Intelligent Surveillance System

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
E_XT-1WR2/E_XT-1WR3	1W	3,3,5,12,15,24	±5, ±9, ±12, ±15, ±24	RoHS	56
F_XT-1WR2/1WR3/2WR2	1W, 2W	3,3,5,12,15,24	3,3,5,9,12,15,24	RoHS	56,59
E_S-1WR2/1WR3/2WR2	1W, 2W	3,3,5,9,12,15,24	±5, ±9, ±12, ±15, ±24	RoHS	55,58
F_S-1WR2/1WR3/2WR2	1W, 2W	3,3,5,9,12,15,24	3,3,5,9,12,15,24	RoHS	55,58
WRE_S-1WR2/3WR2	1W,3W	4.5-9,9-18,18-36,36-75	±5, ±9, ±12, ±15	RoHS	64,68
WRF_S-1WR2/3WR2	1W,3W	4.5-9,9-18,18-36,36-75	3,3,5,9,12,15,24	RoHS	64,68

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

# Recommended Product Line for Applications



## Smart Home

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LS01-15BxxSS(-F)	1W	85-305VAC/70-430VDC	5,9,12,15,24	RoHS	29
LS03-15BxxSR2S(-F)	3W	85-305VAC/70-430VDC	3.3,5,9,12,15,24	RoHS	29
LS03-16BxxSS(-F)	3W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS	30
LS05-15BxxSS(-F)	5W	85-264VAC/100-400VDC	3.3,5,9,12,15,24	RoHS	29
LS05-26BxxSS(-F)	5W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS    (pending)	30
LD03-10BxxR2	3W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS    (pending)	33
LD05-23B	5W	85-305VAC/100-430VDC	3.3,5,9,12,15,24	RoHS	34
LD03-16B	3W	90-528VAC/100-745VDC	3.3,5,9,12,15,24	RoHS	31
LO10-24B	10.92W	30-280VAC/30-400VDC	5,12,13	RoHS	42
LO10-26D0512-04L	10W	57-528VAC/80-745VDC	5,1,12	RoHS	43



## Distribution Network Automation

Series	Power	Load Voltage/ Current	Floating charging voltage/ Charging current	Certification	Page
MCP100-2A27D27	100W	27V/1.5A	27V/3A	RoHS	45
MBP300-2A27D27	108W(350W/30s,432W/1s)	27V/3A	27V/1A	RoHS	45
MBP500-2A27D27L	162W(540W/30s,702W/1s)	27V/4.5A	27V/1.5A	RoHS	45
MBP500-2A54D54L	135W(540W/30s,702W/1s)	54V/1A	54V/1.5A	RoHS	45
MBP300-2A27D27220	62.5W(340W/20s)	27V/1A,220V/0.1A	27V/0.5A	RoHS	44
MBP300-2A27D27M	300W(350W/30s,432W/1s)	27V/1A	27V/0.5A	RoHS	45

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
URF_LP-10WR3	10W	9-36,18-75	3.3,5,9,12,15,24	RoHS	74
URF_LP-20WR3	20W	9-36,18-75	3.3,5,9,12,15,24	RoHS	77



## Transportation



### OBU

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
URB1D-YMD-6WR3	6W	40-160	5,12,15,24	RoHS	81
URB1D-LMD-10WR3/15WR3/20WR3	10W,15W,20W	40-160	3.3,5,12,15,24	RoHS  (pending)	81
URF1D_QB-50W/75W/100W	50W,75W,100W	66-160	3.3,5,12,15,24	RoHS	82
URF1D_HB_150W	150W	50-160	12,15,24	RoHS	82



### Railway Auxiliary Device

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
IB_LS-1W/IB_LS-1WR3	1W	5,12,15,24VDC	5,9,12,15,24	RoHS   (pending)	61
URB_YMD-10WR3	10W	9-36,18-75VDC	3.3,5,9,12,15,24	RoHS	74
URB_LD-20WR3	20W	9-36,18-75VDC	3.3,5,9,12,15,24	RoHS	77
LH_10B	5W,10W,15W,20W,25W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS	37

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# Recommended Product Line for Applications



## Electric Vehicle--Motor Drive

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Isolation Capacitance (pF)	Output Current (mA)	Effi(%) (typ)	Isolation	Certification	Page
CWRF_S-3W	3W	7-18	+15	/	+200	82%	4300VDC	RoHS	69



## BMS(Battery Management System)

Series	Power	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Effi(%) (typ)	Certification	Page
B05_LD-1WR2	1W	5	50,60	17,20	77.79	RoHS	51



## Medical

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
G_S-1W/2WR2	1W,2W	5,12,15,24VDC	±5,±9,±12,±15	RoHS	52
H_S-1W/2WR2	1W,2W	3.3,5,12,24VDC	3.3,5,12,15	RoHS	52
URH_P-6WR3	6W	9-36,18-75VDC	5,6,9,12,15,24	RoHS	69
LD05-20BxxMU	5W	85-264VAC/100-370VDC	5,12,15,24	RoHS	41
LD10-20Bxx	10W	85-264VAC/100-370VDC	3.3,5,9,12,15,24	RoHS	33
LH15-20BxxMU	15W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS	41
LH25-20BxxMU	25W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS	41



## Lighting

Series	Input Voltage Range	Output Voltage (VDC)	Output Current (mA)	Certification	Page
KC24H-1000	5.5-48	3.3-36	0-1000	RoHS	102
KC24H-1200	5.5-48	3.3-36	0-1200	RoHS	102
KC24RT	5.5-48	3.3-36	0-300,0-350,0-500,0-600,0-700	RoHS	102
KC24H-R	5.5-46	3.3-36	0-300,0-350,0-500,0-600,0-700	RoHS	102
KC24W	5.5-48	3.3-36	0-300,0-350,0-500,0-600,0-700	RoHS	102



## Communication

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
URA_YMD-6WR3	6W	9-36,18-75	±5, ±12, ±15, ±24	RoHS	72
URB_YMD-6WR3	6W	9-36,18-75	3.3,5,9,12,15,24	RoHS	72
URF_P-6WR3	6W	9-36,18-75	3.3,5,9,12,15,24	RoHS	72
URA_YMD-10WR3	10W	9-36,18-75	±5, ±9, ±12, ±15, ±24	RoHS	74
VRB-LD-15WR3	15W	18-36,36-75	5,12,15,24	RoHS	77
URA_LD-20WR3	20W	9-36,18-75	±5, ±9, ±12, ±15	RoHS	77
URF_LP-20WR3	20W	9-36,18-75	3.3,5,9,12,15,24	RoHS	77
URB_LD-30WR3	30W	9-36,18-75	3.3,5,9,12,15,24	RoHS	79
VRB_LD-50W	50W	18-36,36-75	3.3,5,12,15,24	RoHS	79

# Recommended Product Line for Applications



## IOT(Internet of Things)

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	Page
LS01-15BxxSS(-F)	1W	85-305VAC/70-430VDC	5,9,12,15,24	RoHS c  us CE CB	29
LS03-15BxxSR2S(-F)	3W	85-305VAC/70-430VDC	3,3,5,9,12,15,24	RoHS c  us CE CB	29
LS05-15BxxSS(-F)	5W	85-264VAC/100-400VDC	3,3,5,9,12,15,24	RoHS c  us CE CB	29
B_XT-1WR2/B_XT-1WR3	1W	3,3,5,12,15,24VDC	3,3,5,6,9,12,15,24	RoHS c  us CE	56
K78(L)-500R3	500/-300/-150mA	4.75-36VDC	3,3,5,-5,9,-12,12,-15,15	RoHS c  us CE	62
K78(L)-1000R3(L)	1000/-500/-300mA	6-36VDC	3,3,5,-5,9,-12,12,-15,15	RoHS c  us CE CB	62
K78U-500(L)	500/300mA	9-72VDC	3,3,5,6,5,9,12,15,24	RoHS	62
K78-1500(L)	1500mA	4.75-18VDC	3,3,5,6,5	RoHS	62
K78-2000(L)	2000mA	4.75-18VDC	1.5,1.8,2.5,3,3,5,6,5	RoHS	62
K78xxM-1000R3	1000/-500/-300mA	6-36VDC	3,3,5,-5,9,-12,12,-15,15	RoHS	62
K78T-500R3	500mA	4.75-36VDC	1.5,1.8,2.5,3,3,5,6,5,9,12,15	RoHS c  us CE CB (pending)	62
K78T-1000R3	1000/800mA	4.75-36VDC	1.5,1.8,2.5,3,3,5,6,5,9,12	RoHS c  us CE CB (pending)	62
K78xxW-500R3	500/-300/-150	4.75-36VDC	3,3,±5,9,±12,±15	RoHS	62

Series	Function	Input Voltage Range (VDC)	Data Rate	Certification	Page
TD321/521DCANH	Single high rate CAN isolation transceiver module	3,3,5	40K-1Mbps	RoHS CE	90
TD321/521SCANH	SMD Single high rate CAN isolation transceiver module	3,3,5	40K-1Mbps	RoHS CE	90
TD321/521D485H	Single high-speed RS485 isolated transceiver module	3.15-3.45,4.75-5.25	200Kbps	RoHS CE	89
TD321/521D485H-A/E	Single high-speed RS485 isolated transceiver module (automatic switching/enhanced)	3.15-3.45,4.75-5.25	500Kbps	RoHS CE	89
TD321/521S485H	SMD Single high-speed RS485 isolated transceiver module	3.15-3.45,4.75-5.25	200Kbps	RoHS CE	89
TD321/521S485H-A/E	SMD Single high-speed RS485 isolated transceiver module (automatic switching/enhanced)	3.15-3.45,4.75-5.25	500Kbps	RoHS CE	89



## Charging Station

Series	Power/Function	Input Voltage Range/Input Voltage	Output Voltage/Data Rate	Certification	Page
LS03/05-15BxxSS(-F)	3W,5W	85-264VAC/100-400VDC	3,3,5,9,12,15,24VDC	RoHS c  us CB	29
LO20-10C0512-01	18.7W	165-264VAC/230-370VDC	5,±12VDC	RoHS	43
LO30-10C0512-12	31.2W	85-264VAC/100-370VDC	5,±12VDC	RoHS	43
LH05/10/15/20/25-10A/BXXX	5W,10W,15W,20W,25W	85-264VAC/100-370VDC	3,3,5,9,12,15,24,48 ±5,±12,±15,±24	RoHS c  us CE CB	37
LM30-00J0512-03E	30W	85-264VAC/100-370VDC	5/±12/24VDC <sub>VDC</sub>	RoHS	40
B_S-1WR2/B_S-1WR3	1W	3,3,5,12,15,24VDC	3,3,5,9,12,15,24VDC	RoHS c  us CE	54
F_S-1WR2/F_S-1WR3	1W	3,3,5,9,12,15,24VDC	3,3,5,9,12,15,24VDC	RoHS c  us CE	55
WRB_S-3WR2	3W	4.5-9,9-18,18-36VDC	3,3,5,9VDC	RoHS CE	66
URB_YMD-6WR3	6W	18-75,9-36VDC	12,15,24VDC	RoHS c  us CE CB	72
TD321/521D485H	Single high-speed RS485 isolated transceiver module	3.15-3.45,4.75-5.25VDC	200Kbps	RoHS CE	89
TD321/521S485H	SMD Single high-speed RS485 isolated transceiver module	3.15-3.45,4.75-5.25VDC	200Kbps	RoHS CE	89
TD321/521S485H-A/E	SMD Single high-speed RS485 isolated transceiver module (automatic switching/enhanced)	3.15-3.45,4.75-5.25VDC	500Kbps	RoHS CE	89
TD321/521DCANH	Single high rate CAN isolation transceiver module	3,3,5,5VDC	40-1Mbps	RoHS CE	90
TD321/521SCANH	SMD Single high rate CAN isolation transceiver module	3,3,5VDC	40K-1Mbps	RoHS CE	90
TD301/501D232H	Single high speed RS232 isolation transceiver	3.0-3.6,4.5-5.5VDC	0-115.2Kbps	RoHS	92

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# AC/DC Converter Selection Guide

## 1-5W DIY Type LS Series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	application environment	Page
LS01-15BxxSS(-F)	1W	85-305VAC/70-430VDC	5,9,12,15,24	RoHS  CE CB	Commercial Indoor Environment	29
LS03-15BxxSR2S(-F)	3W	85-305VAC/70-430VDC	3,3,5,9,12,15,24	RoHS  CE CB	Commercial Indoor Environment	29
LS03-16BxxSS(-F)	3W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS  CE CB	Industrial Outdoor Environment	30
LS05-15BxxSS(-F)	5W	85-264VAC/100-400VDC	3,3,5,9,12,15,24	RoHS  CE CB	Commercial Indoor Environment	29
LS05-26BxxSS(-F)	5W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Indoor Environment	30

## A New Generation of 3-20W ultra-compact AC/DC Converter LDE series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	application environment	Page
LDE03-20B	3W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Indoor Environment	32
LDE05-20B	5W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Indoor Environment	32
LDE06-20B	6W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Indoor Environment	32
LDE10-20B	10W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Indoor Environment	32
LDE15-20B	15W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Indoor Environment	32
LDE20-20B	20W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Indoor Environment	32

## 1-20W Compact LD Series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	application environment	Page
LD01-10B	1W	85-305VAC/120-430VDC	3,3,5,9,12,15,24	RoHS  CE	Industrial Indoor Environment	34
LD02-10B	2W	85-305VAC/120-430VDC	3,3,5,9,12,15,24	RoHS  CE	Industrial Indoor Environment	34
LD03-10BxxR2	3W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Indoor Environment	33
LD05-20B	5W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE (pending)	Industrial Indoor Environment	33
LD05-23B	5W	85-305VAC/100-430VDC	3,3,5,9,12,15,24	RoHS  CE CB	Industrial Indoor Environment	34
LD10-20B	10W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE	Special Industrial Indoor Environment	33
LD10-13B	10W	85-305VAC/122-430VDC	3,3,5,9,12,15,24	RoHS	Industrial Indoor Environment	34
LD12-20B	12W	85-264VAC/100-370VDC	3,3,5,12,15,24	RoHS  CE	Industrial Indoor Environment	33
LD20-10B	20W	85-264VAC/100-370VDC	3,3,5,12,15,24	RoHS  CE	Industrial Indoor Environment	33
LD03-16B	3W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS  CE CB	Industrial Indoor Environment	31
LD10-26B	10W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS CE (pending)	Industrial Indoor Environment	31
LD20-26B	20W	90-528VAC/100-745VDC	3,3,5,9,12,15,24	RoHS CE (pending)	Industrial Indoor Environment	31

## A New Generation of 5-25W standard packaged AC/DC Converter LHE series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	application environment	Page
LHE05-20B	5W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Outdoor Harsh Environment	36
LHE10-20B	10W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Outdoor Harsh Environment	36
LHE15-20B	15W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Outdoor Harsh Environment	36
LHE20-20B	20W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	RoHS  CE CB (pending)	Industrial Outdoor Harsh Environment	36
LHE25-20B	25W	85-264VAC/100-370VDC	3,3,5,9,12,15,24,48	RoHS  CE CB (pending)	Industrial Outdoor Harsh Environment	36

## 5-60W Standard Package LH Series

Series	Power	Input Voltage Range	Output Voltage (Vo1)VDC	Output Voltage (Vo2)VDC	Certification	application environment	Page
LH05-10B	5W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	/	RoHS  CE	Industrial Outdoor Environment	37
LH05-10A	5W	85-264VAC/100-370VDC	+5, +12, +15, +24	-5, -12, -15, -24	RoHS	Industrial Outdoor Environment	37
LH05-10C	5W	85-264VAC/100-370VDC	5	±5, ±12, ±15, ±24	RoHS	Industrial Outdoor Environment	37
LH05-10D	5W	85-264VAC/100-370VDC	5	5, 12, 15, 24	RoHS	Industrial Outdoor Environment	37
LH10-10B	10W	85-264VAC/100-370VDC	3,3,5,9,12,15,24	/	RoHS  CE	Industrial Outdoor Environment	37

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

# AC/DC Converter Selection Guide

## 5-60W Standard Package LH Series

Series	Power	Input Voltage Range	Output Voltage (Vo1)VDC	Output Voltage (Vo2)VDC	Certification	application environment	Page
LH10-10A	10W	85-264VAC/100-370VDC	+5, +12, +15, +24	-5, -12, -15, -24	RoHS   	Industrial Outdoor Environment	37
LH10-10C	10W	85-264VAC/100-370VDC	5	±12, ±15	RoHS	Industrial Outdoor Environment	37
LH10-10D	10W	85-264VAC/100-370VDC	5	5, 12, 15, 24	RoHS   	Industrial Outdoor Environment	37
LH15-10B	15W	85-264VAC/100-370VDC	3.3, 5, 9, 12, 15, 24	/	RoHS    	Industrial Outdoor Environment	37
LH15-10A	15W	85-264VAC/100-370VDC	+5, +12, +15, +24	-5, -12, -15, -24	RoHS	Industrial Outdoor Environment	37
LH15-10C	15W	85-264VAC/100-370VDC	5	±5, ±12, ±15, ±24	RoHS    	Industrial Outdoor Environment	37
LH15-10D	15W	85-264VAC/100-370VDC	5	5, 12, 15, 24	RoHS	Industrial Outdoor Environment	37
LH20-10B	20W	85-264VAC/100-370VDC	3.3, 5, 9, 12, 15, 24	/	RoHS    	Industrial Outdoor Environment	37
LH20-10A	20W	85-264VAC/100-370VDC	+5, +12, +15	-5, -12, -15	RoHS	Industrial Outdoor Environment	37
LH20-10C	20W	85-264VAC/100-370VDC	5	±5, ±12, ±15, ±24	RoHS    	Industrial Outdoor Environment	37
LH20-10D	20W	85-264VAC/100-370VDC	5	12, 15, 24	RoHS    	Industrial Outdoor Environment	37
LH25-10B	25W	85-264VAC/100-370VDC	3.3, 5, 9, 12, 15, 24, 48	/	RoHS    	Industrial Outdoor Environment	37
LH40-10B	40W	85-264VAC/100-370VDC	3.3, 5, 9, 12, 15, 24	/	RoHS   	Industrial Outdoor Environment	39
LH40-10A	40W	85-264VAC/100-370VDC	5, 12, 15	-5, -12, -15	RoHS	Industrial Outdoor Environment	39
LH40-10D	40W	85-264VAC/100-370VDC	5	12, 24	RoHS	Industrial Outdoor Environment	39
LH60-20B	60W	90-264VAC/122-370VDC	5, 9, 12, 15, 24, 48	/	RoHS   	Industrial Outdoor Environment	39

## 5-25W 85-305VAC Wide Input Voltage LH-13B Series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Certification	application environment	Page
LH05-13B	5W	85-305VAC/100-430VDC	3.3, 5, 9, 12, 15, 24	RoHS    	Industrial Outdoor Environment	35
LH10-13B	10W	85-305VAC/100-430VDC	3.3, 5, 9, 12, 15, 24	RoHS    	Industrial Outdoor Environment	35
LH15-13B	15W	85-305VAC/100-430VDC	3.3, 5, 9, 12, 15, 24, 48	RoHS    	Industrial Outdoor Environment	35
LH20-13B	20W	85-305VAC/100-430VDC	3.3, 5, 9, 12, 15, 24	RoHS    	Industrial Outdoor Environment	35
LH25-13B	25W	85-305VAC/100-430VDC	3.3, 5, 9, 12, 15, 24, 48	RoHS    	Industrial Outdoor Environment	35

## 120-240W DIN35 Package LI Series

Series	Power	Input Voltage Range	Output Voltage (VDC)	Output Current (mA)	Certification	application environment	Page
LI120-10B	120W	85-264VAC/120-370VDC	12, 24, 48	10000, 5000, 2500	RoHS    	Industrial Outdoor Environment	40
LI240-10B	240W	85-264VAC/120-370VDC	24, 48	10000, 5000	RoHS    	Industrial Outdoor Environment	40

## 100W 165-265VAC Input Voltage Capacitor Charging MCP Series

Series	Power	Input Voltage Range	Output Voltage/Current (Vo1/Io1)	Output Voltage/Current (Voc/Ioc)	Certification	application environment	Page
MCP100-2A27D27	100W	165-265VAC	27V/1.5A	27V/3A	RoHS	Industrial Outdoor Harsh Environment	45

## 350W/540W 165-264VAC Input Voltage Battery Charging MBP Series

Series	Power	Input Voltage Range	Load Voltage/ Current	Floating charging voltage/ Charging current	Certification	application environment	Page
MBP300-2A27D27	108W(350W/30S, 432W/1S)	165-264VAC	27V/3A	27V/1A	RoHS	Industrial Outdoor Harsh Environment	45
MBP500-2A27D27L	162W(540W/30S, 702W/1S)	165-264VAC	27V/4.5A	27V/1.5A	RoHS	Industrial Outdoor Harsh Environment	45
MBP500-2A54D54L	135W(540W/30S, 702W/1S)	165-264VAC	54V/1A	54V/1.5V	RoHS	Industrial Outdoor Harsh Environment	45
MBP300-2A27D27220	62.5W(340W/20S)	165-264VAC	27V/1A 220V/0.1A	27.0V/0.5A	RoHS	Industrial Outdoor Harsh Environment	44
MBP300-2A27D27M	300W(350W/30S, 432W/1S)	165-264VAC	27V/1A	27V/0.5A	RoHS	Industrial Outdoor Harsh Environment	45

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# AC/DC Converter Selection Guide

## 5-25W AC/DC Converter Specialized for Medical

Series	Power	Input Voltage Range	Output Voltage (Vo1)	Certification	Page
LD05-20BxxMU	5W	85-264VAC/100-370VDC	5,12,15,24	RoHS  CE	41
LH15-20BxxMU	15W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS  CE CB	41
LH25-20BxxMU	25W	85-264VAC/100-370VDC	5,12,15,18,24	RoHS  CE CB	41

## 10-30W AC/DC Converter Specialized for Electric Power

Series	Power	Input Voltage Range	Output Voltage (VDC)	EMI	Certification	Page
LO10-24B	10W	30-280VAC/30-400VDC	5,12,13	Class B	RoHS	42
LO10-26D0512-04L	10.92W	57-528VAC/80-745VDC	5.1/12	Class B	RoHS	43
LO15-26D1212-03	15W	57-528VAC/80-745VDC	12	Class B	RoHS	43
LO15-26D1305-03	15W	57-528VAC/80-745VDC	5,13.5	Class B	RoHS	43
LH10-10BxxER2	10W	85-264VAC/100-370VDC	5,12,24	Class A/Class B	RoHS	44
LH10-10DxxER2	10W	85-264VAC/100-370VDC	5/5,5/12,5/24	Class A/Class B	RoHS	44
LH15-10BxxER2	15W	85-264VAC/100-370VDC	5,12,24	Class A/Class B	RoHS	44
LH15-10DxxER2	15W	85-264VAC/100-370VDC	5/12,5/24	Class A/Class B	RoHS	44
LH25-10BxxER2	25W	85-264VAC/100-370VDC	5,12,15,24	Class A/Class B	RoHS  CE CB	44
LM30-00J0512-03E	30W	85-264VAC/100-370VDC	5/±12/24	Class B/Class B	RoHS	40
LO20-10C0512-01	18.7W	165-264VAC/230-370VDC	5, ±12	Class A	RoHS	43
LO30-10C0512-12	31.2W	85-264VAC/100-370VDC	5, ±12	Class A	RoHS	43

## 10W LO Series Specialized for Flow-meter ( Customization is acceptable )

Series	Power	Input Voltage Range	Output Available (Vo1/Vo2/Vo3)	Output Available (Vo4/Vo5)	Output Available (Vo6/Vo7)	Certification	Page
LO10-10J	10W	85-264VAC/120-370VDC	Triple outputs available (3.3V-24V)	Positive and negative voltage available ( ±5V to ±24V)	Positive and negative voltage available ( ±5V to ±70V)	RoHS	42

# DC/DC Converter Selection Guide

## Fixed Input Voltage, Isolated & Unregulated Output DC/DC Converter

Series	Power	Input Voltage (VDC)	Output Voltage (VDC)	Certification	Applications	Page
B_S-W2R2	0.25W	3.3,5,12,15,24	3.3,5,9,12	RoHS   	universal	54
B_XT-W2R2	0.25W	3.3,5,12,24	3.3,5,9,12,15	RoHS 	universal	56
F_XT-W2R2/F_XT-W2R3	0.25W	5,12	5	RoHS 	universal	56
CF0505XT-1WR3	1W	5	5	RoHS	universal	50
B05_LD-1WR2	1W	5	50,60	RoHS	universal	51
G_S-1WR2	1W	5,12,15,24	±5,±9,±12,±15	RoHS   	Medical	52
H_S-1WR2	1W	3.3,5,12,15,24	3.3,5,12,15	RoHS   	Medical	52
B_RN-1WR2	1W	5	5	RoHS	universal	53
B_RT-1WR2	1W	5	5	RoHS	universal	53
A_S-1WR2/A_S-1WR3	1W	3.3,5,9,12,15,24	±3.3,±5,±9,±12,±15	RoHS  	universal	54
B_S-1WR2/B_S-1WR3	1W	3.3,5,12,15,24	3.3,5,9,12,15,24	RoHS   	universal	54
B_LS-1WR2/B_LS-1WR3	1W	3.3,5,12,15,24	3.3,5,9,12,15,24,60	RoHS  	universal	51,54
E_S-1WR2/E_S-1WR3	1W	3.3,5,9,12,15,24	±5,±9,±12,±15,±24	RoHS  	universal	55
F_S-1WR2/F_S-1WR3	1W	3.3,5,9,12,15,24	3.3,5,9,12,15,24	RoHS  	universal	55
A_XT-1WR2/A_XT-1WR3	1W	3.3,5,12,15,24	±5,±9,±12,±15,±24	RoHS   	universal	56
B_XT-1WR2/B_XT-1WR3	1W	3.3,5,12,15,24	3.3,5,6,9,12,15,24	RoHS  	universal	56
E_XT-1WR2/E_XT-1WR3	1W	3.3,5,12,15,24	±5,±9,±12,±15,±24	RoHS   	universal	56
F_XT-1WR2/F_XT-1WR3	1W	3.3,5,12,15,24	3.3,5,9,12,15,24	RoHS  	universal	56
A_D-1WR2	1W	5,12,15,24	±5,±9,±12,±15,±24	RoHS	universal	57
B_D-1WR2	1W	3.3,5,12,15,24	3.3,5,9,12,15,24	RoHS   	universal	57
E_D-1WR2	1W	5,12,24	±5,±12,±15	RoHS 	universal	57
F_D-1WR2	1W	3.3,5,12,15,24	3.3,5,12,15	RoHS  	universal	57
F_N-1WR3	1W	5	5,9,12,15	RoHS  	universal	57
G_S-2WR2	2W	5,12,15,24	±5,±9,±12,±15	RoHS   	Medical	52
H_S-2WR2	2W	5,12,15,24	5,12,15	RoHS   	Medical	52
A_S-2WR2	2W	5,12,15,24	±3.3,±5,±9,±12,±15	RoHS  	universal	58
B_S-2WR2	2W	5,12,15,24	3.3,5,9,12,15,24	RoHS  	universal	58
E_S-2WR2	2W	5,12,15,24	±3.3,±5,±9,±12,±15,±24	RoHS   	universal	58
F_S-2WR2	2W	5,12,15,24	3.3,5,9,12,15,24	RoHS   	universal	58
B_XT-2WR2	2W	5,12,15,24	3.3,5,9,12,15,24	RoHS 	universal	59
F_XT-2WR2	2W	5,12,15,24	5,9,12,15,24	RoHS 	universal	59
A_D-2WR2	2W	5,12,15,24	±5,±9,±12,±15	RoHS   	universal	60
B_D-2WR2	2W	3.3,5,9,12,24	3.3,5,9,12,15,24	RoHS   	universal	60
E_D-2WR2	2W	5,12,15,24	±5,±9,±12,±15,±24	RoHS   	universal	60
F_D-2WR2	2W	5,12,15,24	5,9,12,15,24	RoHS   	universal	60
B_S-3WR2	3W	5,12	5,9,12	RoHS	universal	58
F_S-3WR2	3W	5,12,15	5,9,12,15	RoHS	universal	58

## HK Series Specialized for Intelligent Instrument

Series	Input Voltage (VDC)	Input Current (mA)	Output Voltage (VDC)	Output Current (mA)	Certification	Page
HK5S_B	5	4-20	3.3,5	2,3,2	RoHS	50
HK8S_B	7.5	4-20	3,3,3,5	3,5,5	RoHS	50
HK_S	5/7-8	3.5-20	3.3	2.5,3,5,2	RoHS	50

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# DC/DC Converter Selection Guide

## Fixed Input Voltage, Isolated & Regulated Output DC/DC Converter

Series	Power	Input Voltage (VDC)	Output Voltage (VDC)	Certification	Applications	Page
IB_LS-1W/IB_LS-1WR3	1W	5,12,15,24	3.3,5,9,12,15,24	RoHS  CE (pending)	universal	61
IB_XT-1WR2	1W	5,12,24	3.3,5,12,15	RoHS CE	universal	61
IF_XT-1WR2	1W	5,12,24	3.3,5,12,15	RoHS CE	universal	61
IF_S-1W/IF_S-1WR3	1W	5,12,24	5,9,12,15	RoHS  CE (pending)	universal	61
IF_RN-1W	1W	5,12	5	RoHS	universal	61
IF_RT-1W	1W	5,12	5	RoHS	universal	61
IB_S-2W	2W	5,12,15,24	5,12,15	RoHS CE	universal	61
IF_S-2W	2W	5,12,24	5	RoHS CE	universal	61
IB_S-W75R3	0.75W	5	3.3,5,9,12,15	RoHS  CE (pending)	universal	61
IB_XT-W75R3	1W	5	3.3,5,9,12,15	RoHS  CE (pending)	universal	61

## 2:1 Wide Input Voltage, Isolated & Regulated Output DC/DC Converter

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Applications	Page
WRA_S-1WR2	1W	4.5-9,9-18,18-36,36-75	±5,±9,±12,±15	RoHS CE	universal	64
WRB_S-1WR2	1W	4.5-9,9-18,18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	64
WRE_S-1WR2	1W	4.5-9,9-18,18-36,36-75	±5,±12,±15	RoHS CE	universal	64
WRF_S-1WR2	1W	4.5-9,9-18,18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	64
WRB_N-2W	2W	9-18,18-36	5,12,15	RoHS	universal	65
WRA_S-3WR2	3W	4.5-9,9-18,18-36,36-75	±5,±9,±12,±15,±24	RoHS CE	universal	66
WRB_S-3WR2	3W	4.5-9,9-18,18-36,36-75	3.3,5,6,9,12,15,24	RoHS CE	universal	66
WRA_ZP-3WR2	3W	4.5-9,9-18,18-36,36-75	±5,±9,±12,±15,±24	RoHS CE	universal	66
WRB_ZP-3WR2	3W	4.5-9,9-18,18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	66
WRE_S-3WR2	3W	4.5-9,9-18,18-36,36-75	±5,±9,±12,±15	RoHS CE	universal	68
WRF_S-3WR2	3W	4.5-9,9-18,18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	68
WRE_P-3WR2	3W	4.5-9,9-18,18-36,36-75	±3.3,±5,±9,±12,±15	RoHS CE	universal	68
WRF_P-3WR2	3W	4.5-9,9-18,18-36,36-75	3.3,5,12,15,24	RoHS CE	universal	68
VRA_YMD-6WR3	6W	9-18,18-36	±5,±12,±15	RoHS  CE CB	universal	70
VRB_YMD-6WR3	6W	9-18,18-36	3.3,5,9,12,15,24	RoHS  CE CB	universal	70
VRA_ZP-6WR3	6W	9-18,18-36,36-75	±5,±12,±15,±24	RoHS CE	universal	70
VRB_ZP-6WR3	6W	9-18,18-36,36-75	3.3,5,12,15,24	RoHS CE	universal	70
VRB_S-6WR3	6W	9-18,18-36	3.3,5,9,12,15,24	RoHS CE (pending)	universal	70
VRB_J(M)D/T-6W	6W	9-18,18-36	3.3,5,12,15	RoHS	universal	71
VRB_YMD-10WR3	10W	9-18,18-36,36-75	3.3,5,12,15,24	RoHS CE	universal	74
VRB_ZP-10WR3	10W	18-36,36-75	12,15,24	RoHS	universal	74
VRA_ZP-10WR3	10W	18-36,36-75	±5,±12,±15	RoHS	universal	74
VRB_S-10WR3	10W	18-36,36-75	3.3,5,9,12,15,24	RoHS	universal	74
VRB_LD-15WR3	15W	18-36,36-75	5,12,15,24	RoHS  CE CB	universal	77
VRA_LD-20WR3	20W	18-36,36-75	±5,±9,±12,±15	RoHS  CE CB	universal	77
VRB_LD-20WR3	20W	18-36,36-75	3.3,5,9,12,15,24	RoHS  CE CB	universal	77
VRB_YMD-15WR3	15W	9-18,18-36,36-75	3.3,5,12,15,24	RoHS CE (pending)	universal	78
VRB_YMD-20WR3	20W	9-18,18-36,36-75	3.3,5,12,15,24	RoHS CE (pending)	universal	78
VRB_LD-30WR3	30W	18-36,36-75	3.3,5,9,12,15,24	RoHS CE	universal	79
VRB_LD-40WHR3	40W	18-36,36-75	12,15,24	RoHS CE (pending)	universal	79
VRB_LD-50W	50W	18-36,36-75	3.3,5,12,15,24	RoHS CE	universal	79

# DC/DC Converter Selection Guide

## 5-200W Ultra-wide Input Voltage DC/DC Converter

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Page
PV05/10/15-27BxxR2	5W,10W,15W	100-1000	5,9,12,15,24	RoHS CE	47
PV15-29BxxL	10W,15W	200-1500	5,12,15,24	RoHS	48
PV15-29B	10W,15W	200-1500	5,12,15,24	RoHS CE	48
PV40-27B	40W	200-1200	12,15,24	RoHS	47
PV40-29B	40W	200-1500	12,15,48	RoHS CE	48
PV45-29D	45W	150-1500	12V/15V/24V double output	RoHS	48
PV200-27Bxx	200W	200-1000	12,15,24,26,48	RoHS CE	49
PV200-29Bxx	200W	300-1500	24.48	RoHS CE	49

## 4:1 Ultra-Wide Input Voltage, Isolated & Regulated Output DC/DC Converter

Series	Power	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Applications	Page
PWB_ZP-3WR2	3W	9-36,18-75	3.3,5,9,12,15,24	RoHS CE	universal	67
URB_MT-3WR3	3W	9-36,18-75	3.3,5,9,12,15,24	RoHS	universal	67
URH_P-6WR3	6W	9-36,18-75	5,9,12,15,24	RoHS CE	Medical	69
URA_YMD-6WR3	6W	9-36,18-75	±5, ±12, ±15, ±24	RoHS	universal	72
URB_YMD-6WR3	6W	9-36,18-75	3.3,5,9,12,15,24	RoHS	universal	72
URA_ZP-6WR3	6W	9-36,18-75	±5, ±9, ±12, ±15, ±24	RoHS	universal	72
URB_ZP-6WR3	6W	9-36,18-75	3.3,5,9,12,15,24	RoHS	universal	72
URE_P-6WR3	6W	9-36	±5, ±12, ±15	RoHS	universal	72
URF_P-6WR3	6W	9-36,18-75	3.3,5,9,12,15,24	RoHS	universal	72
URB_S-6WR3	6W	9-36	3.3,5,9,12,15,24	RoHS CE (pending)	universal	72
URA_YMD-10WR3	10W	9-36,18-75	±5, ±9, ±12, ±15, ±24	RoHS	universal	74
URB_YMD-10WR3	10W	9-36,18-75	3.3,5,9,12,15,24	RoHS	universal	74
URE_LP-10WR3	10W	9-36,18-75	±5, ±12, ±15	RoHS	universal	74
URF_LP-10WR3	10W	9-36,18-75	3.3,5,9,12,15,24	RoHS	universal	74
URA_ZP-10WR3	10W	9-36,18-75	±5, ±12, ±15	RoHS	universal	74
URB_ZP-10WR3	10W	9-36,18-75	12,15,24	RoHS	universal	74
URB_S-10WR3	10W	9-36	3.3,5,9,12,15,24	RoHS CE	universal	74
URA_LD-20WR3	20W	9-36,18-75	±5, ±9, ±12, ±15	RoHS	universal	77
URB_LD-20WR3	20W	9-36,18-75	3.3,5,9,12,15,24	RoHS	universal	77
URF_LP-20WR3	20W	9-36,18-75	3.3,5,9,12,15,24	RoHS	universal	77
URA_YMD-15WR3	15W	9-36,18-75	±5, ±12, ±15, ±24	RoHS CE	universal	77
URB_YMD-15WR3	15W	9-36,18-75	3.3,5,12,15,24	RoHS CE	universal	77
URB_YMD-20WR3	20W	9-36,18-75	3.3,5,12,15,24	RoHS	universal	77
URA_YMD-20WR3	20W	9-36,18-75	±5, ±12, ±15, ±24	RoHS CE	universal	77
URA_LD-30WR3	30W	9-36,18-75	±5, ±12, ±15, ±24	RoHS CE	universal	79
URB_LD-30WR3	30W	9-36,18-75	3.3,5,9,12,15,24	RoHS	universal	79
URA1D_YMD-6WR3	6W	40-160	±5, ±12, ±15	RoHS	electric vehicle	81
URB1D_YMD-6WR3	6W	40-160	5,12,15,24	RoHS CE	electric vehicle	81
URB1D_LMD-10WR3	10W	40-160	3.3,5,12,15,24	RoHS	electric vehicle	81
URB1D_LMD-15WR3	15W	40-160	3.3,5,12,15,24	RoHS CE (pending)	electric vehicle	81
URB1D_LMD-20WR3	20W	40-160	3.3,5,12,15,24	RoHS CE (pending)	electric vehicle	81
URB1D_LD-20WR3	20W	40-160	3.3,5,12,15,24	RoHS	universal	81
URE1D_LD-20WR3	20W	40-160	±5, ±12, ±15	RoHS	universal	81
URF1D_LD-40WR3	40W	40-160	3.3,5,12,15,24,48	RoHS	universal	81
UW2405D/240512D-20W	20W	6-50	5,12	RoHS	universal	65
URF1D_QB-50W	50W	66-160	3.3,5,12,15,24	RoHS	electric vehicle	82
URF1D_QB-75W	75W	66-160	5,12,15,24	RoHS	electric vehicle	82
URF1D_QB-100W	100W	66-160	12,15,24	RoHS	electric vehicle	82
URF1D_HB-150W	150W	50-160	12,15,24	RoHS	electric vehicle	82
URF_QB-75WR3	75W	18-75	5,12,15,24,48	RoHS	universal	80
URF_QB-100WR3	100W	9-36,18-75	5,12,15,24,28,48	RoHS	universal	80
URF_QB-150WR3	150W	18-75	5,12,15,24,48	RoHS	universal	80
URF_QB-200WR3	200W	18-75	5,12,15,24,48	RoHS	universal	80

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# DC/DC Converter/EMC Auxiliary Device Selection Guide

## 5-200W Ultra-wide Input Voltage DC/DC Converter

Series	Output Current (mA)	Input Voltage Range (VDC)	Output Voltage (VDC)	Certification	Applications	Page
K78-500R3	500/-300/-150	4.75-36	3.3, 5, 9, 12, 15, -5, -12, -15	RoHS  CE	universal	62
K78L-500R3	500/-300/-150	4.75-36	3.3, 5, 12, 15, -5, -12, -15	RoHS  CE	universal	62
K78-1000R3(L)	1000/-500/-300	6-36	3.3, 5, 9, 12, 15, -5, -12, -15	RoHS  CE CB	universal	62
K78L-1000R3	1000/-500/-300	6-36	3.3, 5, 12, 15, -5, -12, -15	RoHS  CE CB	universal	62
K78xxM-1000R3	1000/-500/-300	6-36	3.5, -5, 9, 12, -12, 15, -15	RoHS  CE CB (pending)	universal	62
K78U-500(L)	500/300	9-72	3.3, 5, 6, 5, 9, 12, 15, 24	RoHS	universal	62
K78-1500	1500	4.75-18	3.3, 5, 6, 5	RoHS	universal	62
K78-1500L	1500	4.75-18	3.3, 5, 6, 5	RoHS	universal	62
K78-2000	2000	4.75-18	1.8, 2.5, 3, 3.5, 6, 5	RoHS	universal	62
K78-2000L	2000	4.75-18	1.5, 3, 3.5, 6, 5	RoHS	universal	62
K78T-500R3	500	4.75-36	1.5, 1.8, 2.5, 3, 3.5, 6, 5, 9, 12, 15	RoHS  CE CB (pending)	universal	62
K78T-1000R3	1000/800	4.75-36	1.5, 1.8, 2.5, 3, 3.5, 6, 5, 9, 12	RoHS  CE CB (pending)	universal	62
K78xxW-500R3	500/-300/-150	4.75-36	3.3, 5, -5, 9, 12, -12, 15, -15	RoHS	universal	62

## Specialized for Super-capacitor and Lithium Battery-powered DC/DC Converter

Series	Input Voltage Range (VDC)	Output Voltage (VDC)	Constant Current (mA)	EFFI (%) (typ)	Certification	Page
URF2428LP-700	9-36	0-28.5	700	86/88	RoHS	73
URB24A5YMD-1000	9-36	0-4.8	1000	76/78	RoHS	73

## EMC Auxiliary Device

Series	Function	Input Voltage Range	Max. Output Power/Current	Certification	Page
FC-LX1D	EMC Filter	85-305VAC	1.5A	RoHS	84
FC-LX1D2	EMC Filter	85-305VAC	1.5A	RoHS	84
FC-L01DV1	EMC Filter	85-305VAC	0.3A	RoHS	84
FC-AX3D	EMC Filter	10-36VDC	30W	RoHS	84
FC-B02D	EMC Filter	18-75VDC	30W	RoHS	84
FC-D03D	EMC Filter	18-36VDC	50W	RoHS	84
FC-E03D	EMC Filter	36-75VDC	75W	RoHS	84
FC-A01D	EMC Filter	9-36VDC	1A	RoHS	84
FC-B01D	EMC Filter	18-75VDC	1A	RoHS	84
FC-C01D	EMC Filter	40-160VDC	10W	RoHS	85
FC-CX1D	EMC Filter	40-160VDC	30W	RoHS	85
FC-C03D	EMC Filter	40-160VDC	50W	RoHS	85
FC-CX3D	EMC Filter	66-160VDC	100W	RoHS	85
FI-B03D	EMI Filter	0-80VDC	3A	RoHS	85
FS-A01D	Surge Suppressor	0-40VDC	0.6A	RoHS	86
FT-BX1D	EFT Suppressor	0-80VDC	1.5A	RoHS	86
FS-TD01D	485-AB Bus Surge Protection Module	0-5VDC	≤0.1	RoHS	87
FL2D	Common Mode Filter	/	0.5, 1, 3A	RoHS	87

# Isolation Transceiver Module/ Signal Conditioning Module Selection Guide

## Industrial Bus Isolation Transceiver Module

Series	Function	Power Supply	Data Rate	Certification	Page
TD321/521D485	Single RS485 isolated transceiver module	3.15-3.45,4.75-5.25VDC	19.2Kbps	RoHS CE	89
TD321/521D485H	Single high-speed RS485 isolated transceiver module	3.15-3.45,4.75-5.25VDC	200Kbps	RoHS CE	89
TD321/521D485H-A	Single high-speed RS485 isolated transceiver module (automatic switching)	3.15-3.45,4.75-5.25VDC	500Kbps	RoHS CE	89
TD321/521D485H-E	Single high-speed RS485 isolated transceiver module (enhanced)	3.15-3.45,4.75-5.25VDC	500Kbps	RoHS CE	89
TD322/522D485H-A	Dual channel RS485 transceiver(automatic switching)	3.15-3.45,4.75-5.25VDC	120Kbps	RoHS CE	89
TD321/521S485	SMD Single RS485 isolated transceiver module	3.15-3.45,4.75-5.25VDC	19.2Kbps	RoHS CE	89
TD321/521S485H	SMD Single high-speed RS485 isolated transceiver module	3.15-3.45,4.75-5.25VDC	200Kbps	RoHS CE	89
TD321/521S485H-A	SMD Single high-speed RS485 isolated transceiver module (automatic switching)	3.15-3.45,4.75-5.25VDC	500Kbps	RoHS CE	89
TD321/521S485H-E	SMD Single high-speed RS485 isolated transceiver module (enhanced)	3.15-3.45,4.75-5.25VDC	500Kbps	RoHS CE	89
TD321/521DCAN	Single universal CAN isolation transceiver module	3.3,5VDC	5K-1Mbps	RoHS CE	90
TD321/521DCANH	Single high rate CAN isolation transceiver module	3.3,5VDC	40K-1Mbps	RoHS CE	90
TD321/521SCAN	SMD Single universal CAN isolation transceiver module	3.3,5VDC	5K-1Mbps	RoHS CE	90
TD321/521SCANH	SMD Single high rate CAN isolation transceiver module	3.3,5VDC	40K-1Mbps	RoHS CE	90
TD322/522DCAN	Duplex High Rate Isolation CAN Transceiver Module	3.3,5VDC	40K-1Mbps	RoHS CE	90
TD301/501MCAN	Single high speed Compact size CAN isolation transceiver module	3.3,5VDC	40K-1Mbps	RoHS CE	90
TD301/501MCANFD	Single high speed Compact size CANFD isolation transceiver module	3.3,5VDC	40K-5Mbps	RoHS CE	90
TD301/501DCANHE	High Surge Protective Isolated CAN transceiver	3.3,5VDC	40K-1Mbps	RoHS	90
TD301/501D232H	Single high speed RS232 isolation transceiver	3.0-3.6,4.5-5.5VDC	0-115.2Kbps	RoHS	92
TD302/502D232H	Dual high speed RS232 isolation transceiver	3.0-3.6,4.5-5.5VDC	0-115.2Kbps	RoHS	92
TLAxx-03K485	Integrated isolated 485 ACDC power supply	85-305VAC/100-430VDC	500Kbps	RoHS	91
TLAxx-03KCAN	Integrated isolated CAN ACDC power supply	85-305VAC/100-430VDC	5-1000Kbps	RoHS	91

## Signal Conditioning Module

Series	Function	Input Signal	Output Signal	Isolation	Certification	Page
TE_N	Active module	0-5V,0-10V,4-20mA	0-5V,0-10V	2000VAC	RoHS CE	93
TE_AN	Active module positive and negative signal	$\pm 5V, \pm 10V$	0-5V,0-10V	2000VAC	RoHS CE	93
TE_CN	Active module positive and negative signal	$\pm 5V, \pm 10V$	$\pm 5V, \pm 10V$	2000VAC	RoHS CE	93
TEM_AN	Active, mV-class, positive and negative signal	$\pm 75mV/\pm 100mV$	0-5V	2000VAC	RoHS CE	93
TEM_CN	Active, mV-class, positive and negative signal	$\pm 50mV/\pm 100mV/\pm 200mV$	$\pm 5V/\pm 10V$	2000VAC	RoHS CE	93
TE_HN	Active high precision high isolated detection type signal	0-5V	0-5V	4000VAC	RoHS	98
TF_N	Active module	0-5V,0-10V	0/4-20mA,0-5V,0-10V	2000VAC	RoHS CE	94
TF_GN	Active module	0-5V	$\pm 10V$	2000VAC	RoHS CE	94
TFW_N	Active High Precision PWM Signal	5V	0-20mA,0-10V	2000VAC	RoHS CE	94
T_P	Active module	0/4-20mA,0/1-5V,0-10V	0/4-20mA,0-5V,0-10V	2500VDC	RoHS	96
T_CP	Active high precision signal	$\pm 5V, \pm 10V$	$\pm 5V/\pm 10V, \pm 20mA$	2500VDC	RoHS	96
TM_P	Active high precision signal (mV-class)	0-10/30/50/75/100mV	0/4-20mA,0-5V,0-10V	2500VDC	RoHS	95
TM_CP	Active high precision signal (mV-class)	$\pm 10/\pm 20/\pm 50/\pm 75/\pm 100mV/\pm 200mV$	$\pm 5V/\pm 10V$	2500VDC	RoHS	95
T1100N	Passive module	4-20mA	4-20mA	3000VDC	RoHS CE	96
T1100L	Passive module	4-20mA	4-20mA	3000VDC	RoHS CE	96
T1100L-F	Passive module(loop power supply)	4-20mA	4-20mA	3000VDC	RoHS CE	96
T_HL	Two-wire Self-Powered module with HART	0-2.5V	3.7-22mA	2000VAC	RoHS CE	97
T_L	Two-wire loop power supply	0-2.5V	3.7-22mA	2000VAC	RoHS CE	97
TRP_P	RTDs detection type isolated module	Pt100(0-200°C)	4-20mA	2000VAC	RoHS CE	97

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# LED/IGBT Driver /Isolation Transmitter Selection Guide

## LED Driver

Series	Input Voltage Range	Output Voltage(VDC)	Output Current(mA)	Certification	Page
KC24H-1000	5.5-48VDC	3.3-36	1000	RoHS	102
KC24H-1200	5.5-48VDC	3.3-36	1200	RoHS	102
KC24H-R	5.5-46VDC	3.3-36	0-300,0-350,0-500,0-600,0-700	RoHS	102
KC24W	5.5-48VDC	3.3-36	0-300,0-350,0-500,0-600,0-700	RoHS	102
KC24RT	5.5-48VDC	3.3-36	0-300,0-350,0-500,0-600,0-700	RoHS	102

## DC/DC Converter for IGBT Driver

Series	Nominal Input Voltage(VDC)	Positive Output (VDC)	Positive Output (VDC)	Negative Output (VDC)	Output Current (mA)	Efficiency	Isolation	Certification	Page
QA01	15	14.5-15.5	+15	-8.7	+80/-40	80%	3000VAC	RoHS  CB CE 98	
QA02	12	11.6-12.4	+15	-8.7	+80/-40	80%	3000VAC	RoHS  CB CE 98	
QA03	24	23.3-24.7	+15	-8.7	+80/-40	80%	3000VAC	RoHS  CB CE 98	
QA04	12	9-15	+15	-8	+100/-80	80%	3000VAC	RoHS  CB CE 98	
QA01C	15	13.5-16.5	+20	-4	+100/-100	83%	3500VAC	RoHS  CB CE 99	
QA1201C-20	12	10.8-13.2	+20	-4	100/10	80%	3500VAC	RoHS	
QA2401C-20	24	21.6-26.4	+20	-4	+100/-100	83%	3500VAC	RoHS	
QA15115R2	15	13.5-16.5	+15	-2.5	+100/-100	80%	3500VAC	RoHS	
QA01C-18	15	13.5-16.5	+18	-3	+100/-100	83%	3500VAC	RoHS	
QA121C2	12	10.8-13.2	+15	-3.5	-111/-111	78%	3500VAC	RoHS	
QA151M	15	14.4-15.9	+15	-5	+100/-100	80%	3500VAC	RoHS	
QAW01	12	9-18	+15	-9	+200/-200	85%	3000VDC	RoHS	
QAW02	24	18-36	+15	-9	+200/-200	85%	3000VDC	RoHS	
QA152D	15	13.5-16.5	+15	-9	+200/-200	83%	4000VAC	RoHS CE	
QA156D-24	15	13.5-16.5	+24	/	150/15	80%	12000VDC	RoHS CE	
QA121	12	11.4-12.6	+15	-8	+120/-120	81%	3000VAC	RoHS	
QA151	15	14.25-15.75	+15	-8	+120/-120	81%	3000VAC	RoHS	
QA241	24	22.8-25.2	+15	-8	+120/-120	81%	3000VAC	RoHS	
CQAW01	12	7-18	+15	-9	+200/-200	81%	3000VAC	RoHS	

## Hybrid Integrated IGBT Driver (Built-in Isolated DC/DC Converter)

Series	Power Supply (VDC)	Input Voltage Range(VDC)	Output High-level Voltage VOH(VDC)	Output Low-level Voltage VOL(VDC)	Max. Driving Current (A)	Max.Frequency (KHz)	Isolation	Certification	Page
QP12W08S-37	15	14.5-15.5	15	-9	±8	20	3750VAC	RoHS	100

## Hybrid Integrated IGBT Driver

Series	Power Supply VCC(VDC)	Power Supply VEE(VDC)	Gate Voltage (VDC)	Max. Driving Current (A)	Max.Frequency (KHz)	Isolation	Certification	Page
QC962-8A	15	-10	+14/-9	±8	40	3750VAC	RoHS	101

## Signal Isolator / Isolation Barrier

Series	Function	Input Signal	Output Signal	Feature	Page
TAx0W	Analog signal	4-20mA,0-10V	0/4-20mA,0-10V	DIN-Rail power supply	103
TAx05W	DC current input analog signal	4-20mA	4-20mA,1-5V,0-10V	DIN-Rail power supply	103
TAx06W	Passive Barrier	4-20mA	4-20mA	/	104
TAx0PW	DC current/voltage input programmable analog signal	0/4-20mA	0/1-5V,0/2-10V	DIN-Rail power supply	104
TAx5PW	DC current input programmable analog signal	0/4-20mA	0/4-20mA,0/1-5V,0/2-10V	DIN-Rail power supply	105
TRxx0PW	Programmable RTD	Pt100,Cu50,Cu100	0/4-20mA,0/1-5V,0/2-10V	DIN-Rail power supply	105
TR1x0PWE	Programmable RTD	Pt100,Cu50,Cu100	0/4-20mA,0/1-5V,0/2-10V	DIN-Rail power supply	106
TCxx0PW	Programmable thermocouple	R,S,K,J,T,B,E thermocouple,mV signal	0/4-20mA,0/1-5V,0/2-10V	DIN-Rail power supply	106

# Pin-Out Details

## DC/DC Converter Pin-Out


GND	Input GND
+Vo	+Output
0V	Output GND
-Vo	-Output
DC(-Vin)	-Input
DC(+Vin)	+Input
Vadj	Voltage Adjustable
CTRL	ON/OFF Control Function
ON/OFF	ON/OFF Control, UVLO & Starting Time Delay Function
CS	With External Capacitance(Reduce Ripple)
Trim	Output Voltage Adjustable
-Sense	Voltage Output Remote Compensation(Output GND)
+Sense	Voltage Output Remote Compensation(Output +)
NC	No Electrical Connection
No Pin	No Pin

## AC/DC Converter Pin-Out

AC(N)	Neutral Wire
AC(L)	Live Wire
-Vo	-Output
+Vo	+Output
Trim	Output Voltage Adjustable
COM	Common
	GND Protection
+V(CAP)	+ External Capacitance
-V(CAP)	-External Capacitance
NC	No Electrical Connection
No Pin	No Pin

## Isolation Transmitter Module Pin-Out

Pin+	Power Supply +
Pin-	Power Supply-
Pout+	Isolated Output +
Pout-	Isolated Output-
Pgnd	Isolated Output GND
Vo	Output
+Poss	+ Isolated Power, Output
-Poss	-Isolated Power, Output
FB	Input Feedback
Ocom	Output Common
Icom	Input Common
Pin com/GND	Power Common
Iout	Current Output
Iin	Current Input
Sin+	Signal Input +
Sin-	Signal Input-
Sout+	Signal Output +
Sout-	Signal Output-
+Piss	+ Isolated Power, Input
-Piss	-Isolated Power, Input
-IN	-Input
+IN	+Input
Pin	Power supply
Adj	Gain Adjustable
GR	Gain auxiliary regulation
SG	Gain regulation
ZR	Zero auxiliary regulation
SZ	Zero regulation



# AC/DC Converter

<b>1、 These series are suitable for Commercial Indoor Environment</b>	
1-5W DIY Type LS Series .....	29
<b>2、 These series are suitable for Industrial Indoor Environment</b>	
3-5W 90-528VAC ultra-wide input voltage AC/DC converter LS series.....	30
3-20W 90-528VAC ultra-wide input voltage AC/DC converter LD series.....	31
New generation 3-20W Compact Size Universal Input Voltage AC/DC converter LDE Series.....	32
3-20W Compact LD Series.....	33
1-10W Compact 85-305VAC Wide Input Voltage LD Series.....	34
10W Seven outputs Open Frame LO Series Specialized for Flow meter .....	42
<b>3、 These series are suitable for Special Industrial Indoor Environment</b>	
5W Compact Size LD05-MU Series for Medical.....	41
15-25W Low Power Consumption AC/DC LH-MU Series for Medical .....	41
<b>4、 These series are suitable for Industrial Outdoor Environment</b>	
5-25W 85-305VAC Wide Input Voltage LH-13B Series.....	35
5-25W Standard Package LH Series.....	37
40-60W Standard Package LH Series.....	39
120-240W DIN35 Package LI Series .....	40
30W Four Outputs Metal Mask LM Series Specialized for Protective Relaying System.....	40
10W Open Frame LO Series Specialized for Electric Power.....	42
10-15W Dual Outputs 528V Input Voltage Open Frame LO Series Specialized for Electric Power.....	43
20-30W Three Outputs Open Frame AC/DC Converters Specialized for AC Charging Station.....	43
10-25W LH-ER2 Series Specialized for Electric Power.....	44
<b>5、 These series are suitable for Special Industrial Outdoor Environment (Harsh Environment)</b>	
New generation 5-25W standard packaged AC/DC converter LHE series.....	36
300W Three Outputs Battery Charging MBP Series .....	44
100W 165-265VAC Input Voltage Capacitor Charging MCP Series.....	45
350W/540W 165-264VAC Input Voltage Battery Charging MBP Series.....	45
<b>6、 These series are suitable for Special Industrial Outdoor Environment (Plateau)DC/DC Converter</b>	
5-40W ultra-wide input voltage PV series.....	47-48
45W 150-1500VDC Ultra-wide Input Voltage Caged Power Supply Specialized for SVG.....	48
200W New Energy 200-1500VDC Ultra-wide input voltage converter .....	49

# These series are suitable for Commercial Indoor Environment

## 1-5W DIY Type LS Series

CE CB RoHS

### Features

- Suitable for various applications, especially for limited dimension application
- Input voltage range: 85-305VAC/70-430VDC;  
LS05: 85-264VAC/100-400VDC
- Operating temperature: -40°C to +85°C (LS05: -25°C to +85°C)
- Isolation: 3000VAC
- Efficiency up to 79%
- Output short-circuit and over-current protections
- IEC/UL/EN60950 approval




### Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi (%) (typ)	Certification
LS01-15B05SS(-F)	1W	85-305VAC 70-430VDC	5V/200mA	66	
LS01-15B09SS(-F)		85-305VAC 70-430VDC	9V/111mA	67	
LS01-15B12SS(-F)		85-305VAC 70-430VDC	12V/83mA	70	
LS01-15B15SS(-F)		85-305VAC 70-430VDC	15V/67mA	69	
LS01-15B24SS(-F)		85-305VAC 70-430VDC	24V/42mA	68	
LS03-15B03SR2S(-F)	1.98W	85-305VAC 70-430VDC	3.3V/600mA	65	
LS03-15B05SR2S(-F)	3W	85-305VAC 70-430VDC	3.3V/600mA	70	
LS03-15B09SR2S(-F)	3W	85-305VAC 70-430VDC	9V/333mA	73	
LS03-15B12SR2S(-F)		85-305VAC 70-430VDC	12V/250mA	74	
LS03-15B15SR2S(-F)		85-305VAC 70-430VDC	15V/200mA	75	
LS03-15B24SR2S(-F)	3.3W	85-305VAC 70-430VDC	24V/125mA	77	
LS05-15B03SS(-F)	5W	85-264VAC 100-400VDC	3.3V/1000mA	67	
LS05-15B05SS(-F)		85-264VAC 100-400VDC	5V/1000mA	74	
LS05-15B09SS(-F)		85-264VAC 100-400VDC	9V/560mA	75	
LS05-15B12SS(-F)		85-264VAC 100-400VDC	12V/420mA	76	
LS05-15B24SS(-F)		85-264VAC 100-400VDC	24V/210mA	79	


- Note: 1. External electrolytic capacitors are required. For more details refer to typical application;  
2. All series are available for 90° pin-out;  
3. Detailed application please refer to datasheet;  
4. If the application requires higher performance for EMC, our matching FC-L01DV1 is available;  
5. LS05-15BxxSS-F series are without CE/UL approval.

### Package Dimension

LS01&LS03: LxWxH: 35.00x18.00x11.00(mm)

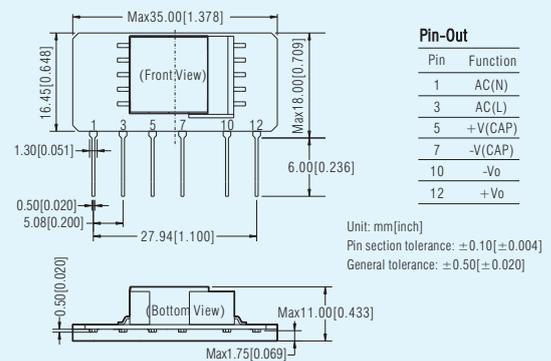


LS05: LxWxH: 42.00x20.00x13.65(mm)

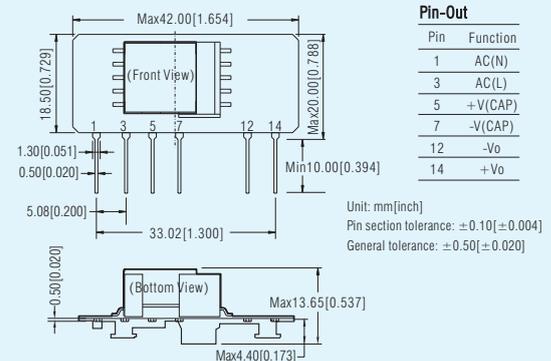


### EMC Solution-recommended Circuit

e.g.: LS03-15BXXSR2S(-F), for others please refer to datasheet.

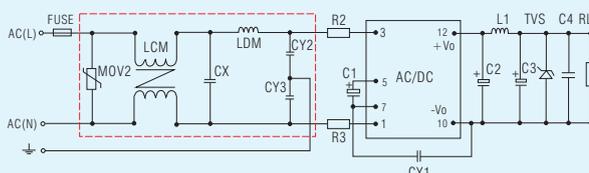

### Typical Application Circuit

e.g.: LS03-15BXXSR2S(-F), for others please refer to datasheet.

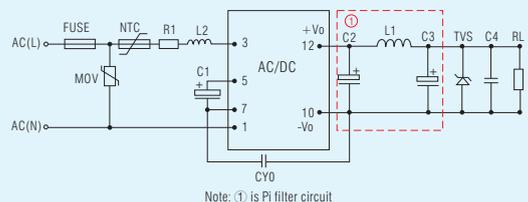


# These series are suitable for Industrial Indoor Environment

## 3-5W 90-528VAC ultra-wide input voltage AC/DC converter LS series

**CE** **RoHS** **CB** **UL** **US**

### Features

- Suitable for various applications, especially for limited dimension application
- Input voltage range: 90-528VAC/100-745VDC
- Operating temperature: -40°C to +85°C
- Isolation: 4000VAC
- Output short-circuit and over-current protections
- FCC part 15 standard, UL/IEC/EN60950 approval (Pending)

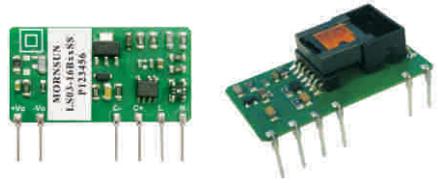


Product Program				
Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Certification
LS03-16B03SS(-F)	1.65W	90-528VAC	3.3V/500mA	
LS03-16B05SS(-F)	2.5W	90-528VAC	5V/500mA	
LS03-16B09SS(-F)	3W	90-528VAC	9V/333mA	
LS03-16B12SS(-F)		90-528VAC	12V/250mA	
LS03-16B15SS(-F)		90-528VAC	15V/200mA	
LS03-16B24SS(-F)	90-528VAC	24V/125mA		
LS05-26B03SS(-F)	2.805W	90-528VAC	3.3V/850mA	
* LS05-26B05SS(-F)	4.250W	90-528VAC	5V/850mA	
* LS05-26B09SS(-F)	5.000W	90-528VAC	9V/560mA	
* LS05-26B12SS(-F)		90-528VAC	12V/420mA	
* LS05-26B15SS(-F)		90-528VAC	15V/340mA	
* LS05-26B24SS(-F)	90-528VAC	24V/215mA		

- Note: 1. External electrolytic capacitors are required to AC input modules for LS series;  
 2. LD series in DIP package meet the requirements of ±1KV surge level. If the application requires higher performance for surge, our recommended peripheral circuit is available;  
 3. LS series are available for 90° pin-out.  
 4. Products marked with "\*" meet UL62368, EN62368, FCC part 15 standard


### Package Dimension

LS03/LS05 Series: LxWxH: 44.50x22.50x13.00(mm)

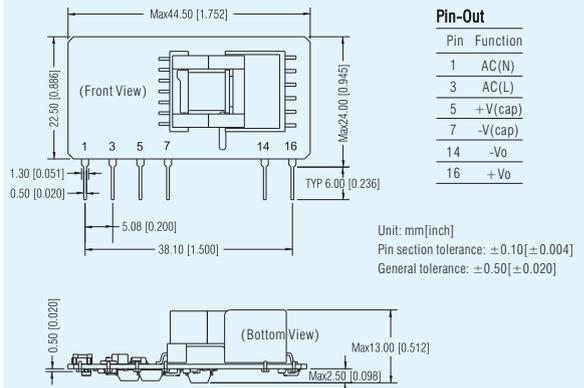

- Note:  
 1. It is necessary to add C1, C2 and R1, R2 between pin 5 and pin 7;  
 2. It is necessary to add pi-type filter circuit to the output, such as the typical application of Figure 1.

### Typical Application Circuit

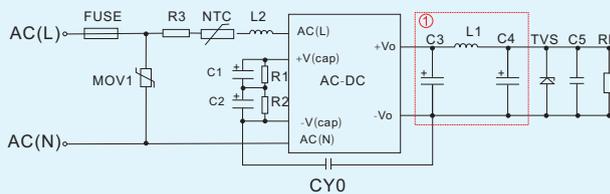

Note: ① is Pi filter circuit

# These series are suitable for Industrial Indoor Environment

## 3-20W 90-528VAC ultra-wide input voltage AC/DC converter LD series

(Pending)

### Features

- Suitable for electric power, industrial control and intelligent building applications
- Input voltage range: 90-528VAC/100-745VDC
- Operating temperature: -40°C to +70°C
- Isolation: 4000VAC(LD03:3000VAC)
- FCC part15 standard, UL/IEC/EN60950 approval, IEC/EN62368 approval(Pending)
- Output short-circuit, over-current and over-voltage protections




### Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi.(%) (typ)	Certification	
LD03-16B03	1.65W	90-528VAC	3.3V/500mA	63	 (Pending)	
LD03-16B05	2.5W	90-528VAC	5V/500mA	70		
LD03-16B09	3W	90-528VAC	9V/333mA	73		
LD03-16B12		90-528VAC	12V/250mA	76		
LD03-16B15		90-528VAC	15V/200mA	76		
LD03-16B24	90-528VAC	24V/125mA	76	 (Pending)		
LD10-26B03	6.6W	90-528VAC	3.3V/2000mA		72	
LD10-26B05	10W	90-528VAC	5V/2000mA		76	
LD10-26B09		90-528VAC	9V/1100mA		78	
LD10-26B12		90-528VAC	12V/900mA		80	
LD10-26B15		90-528VAC	15V/700mA		80	
LD10-26B24	90-528VAC	24V/450mA	82		 (Pending)	
LD20-26B03	11.88W	90-528VAC	3.3V/3600mA			74
LD20-26B05	18W	90-528VAC	5V/3600mA			78
LD20-26B09	20W	90-528VAC	9V/2230mA			79
LD20-26B12		90-528VAC	12V/1660mA	82		
LD20-26B15		90-528VAC	15V/1330mA	83		
LD20-26B24	90-528VAC	24V/833mA	83			

### Package Dimension

LD10/20 Series:

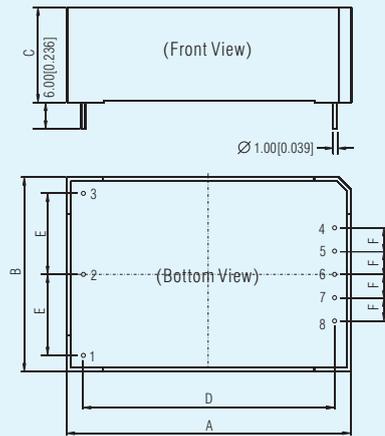

#### Outline & Dimensions


NO.	LD10	LD20
A	62.00	70.00
B	45.00	48.00
C	30.00	30.00
D	54.00	62.00
E	17.50	20.00
F	5.00	5.75
G	12.50	12.50

#### Pin-Out

Pin	LD10-26B	LD20-26B
1	NC	NC
2	AC(N)	AC(N)
3	AC(L)	AC(L)
4	+Vo	+Vo
5	No Pin	No Pin
6	No Pin	No Pin
7	No Pin	No Pin
8	-Vo	-Vo

Unit: mm[inch]  
 Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
 General tolerance:  $\pm 0.50[\pm 0.020]$

LD03 Series: LxWxH: 50.80x25.40x15.16(mm)

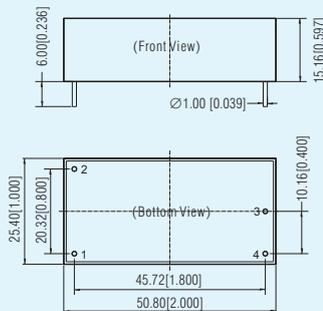


#### Pin-Out

Pin	Function
1	AC(N)
2	AC(L)
3	+Vo
4	-Vo

Unit: mm[inch]  
 Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
 General tolerance:  $\pm 0.50[\pm 0.020]$

### EMC Solution-recommended Circuit

Take LD03-16Bxx as an example, others please refer to datasheet.

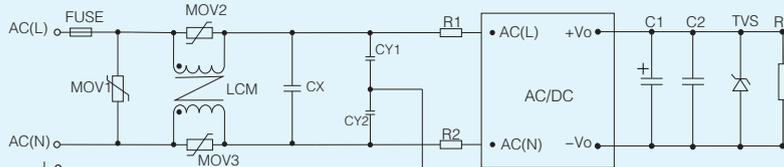

# These series are suitable for Industrial Indoor Environment

## New generation 3-20W Compact Size Universal Input Voltage AC/DC converter LDE Series

**UL** **US** **CE** **CB** **RoHS**  
(Pending)

### Features

- Compact size, suitable for limited dimension application
- Input voltage range: 85-264VAC/100-370VDC
- Operating temperature: -40°C to +70°C
- Isolation: 4000VAC
- Efficiency up to 83%
- high efficiency, environment friendly
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Output short-circuit, over-current and over-voltage protections
- IEC/EN/UL62368, EN60335 approval(Pending)



A2S Chassis Mounting




A4S DIN-Rail Mounting

### Product Program


Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi(%) (typ)	Certification	
LDE03-20B03	2.3W	85-264VAC	3.3V/700mA	66	<b>UL</b> <b>US</b> <b>CE</b> <b>CB</b> <b>RoHS</b> (Pending)	
LDE03-20B05		85-264VAC	5V/600mA	74		
LDE03-20B09		85-264VAC	9V/330mA	75		
LDE03-20B12		3W	85-264VAC	12V/250mA		77
LDE03-20B15			85-264VAC	15V/200mA		77
LDE03-20B24			85-264VAC	24V/125mA		78
LDE05-20B03	3.3W	85-264VAC	3.3V/1000mA	68		
LDE05-20B05		85-264VAC	5V/1000mA	75		
LDE05-20B09		85-264VAC	9V/560mA	77		
LDE05-20B12	5W	85-264VAC	12V/420mA	79		
LDE05-20B15		85-264VAC	15V/330mA	79		
LDE05-20B24		85-264VAC	24V/210mA	81		
LDE06-20B03		4.1W	85-264VAC	3.3V/1250mA		70
LDE06-20B05	85-264VAC		5V/1200mA	76		
LDE06-20B09	6W		85-264VAC	9V/660mA		74
LDE06-20B12			85-264VAC	12V/500mA		77
LDE06-20B15			85-264VAC	15V/400mA		77
LDE06-20B24	85-264VAC	24V/250mA	80			
LDE10-20B03	6.6W	85-264VAC	3.3V/2000mA	71		
LDE10-20B05		85-264VAC	5V/2000mA	76		
LDE10-20B09		10W	85-264VAC	9V/1100mA	80	
LDE10-20B12			85-264VAC	12V/900mA	81	
LDE10-20B15			85-264VAC	15V/700mA	81	
LDE10-20B24	85-264VAC	24V/450mA	83			
LDE15-20B03	8.9W	85-264VAC	3.3V/2700mA	72		
LDE15-20B05	13.5W	85-264VAC	5V/2700mA	76		
LDE15-20B09		85-264VAC	9V/1660mA	77		
LDE15-20B12		15W	85-264VAC	12V/1250mA	80	
LDE15-20B15	85-264VAC		15V/1000mA	81		
LDE15-20B24	85-264VAC		24V/625mA	81		
LDE20-20B03	11.8W	85-264VAC	3.3V/3600mA	74		
LDE20-20B05	18W	85-264VAC	5V/3600mA	78		
LDE20-20B09		85-264VAC	9V/2200mA	79		
LDE20-20B12	20W	85-264VAC	12V/1660mA	82		
LDE20-20B15		85-264VAC	15V/1330mA	83		
LDE20-20B24		85-264VAC	24V/833mA	83		

### Package Dimension


LDE03/05 Series: LxWxH: 37.00x24.50x18.00(mm)

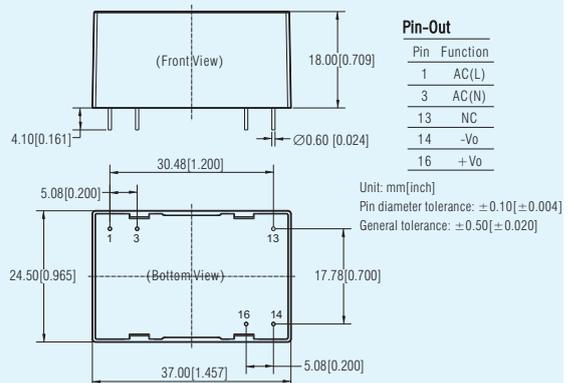

LDE06/10/15/20 Series:

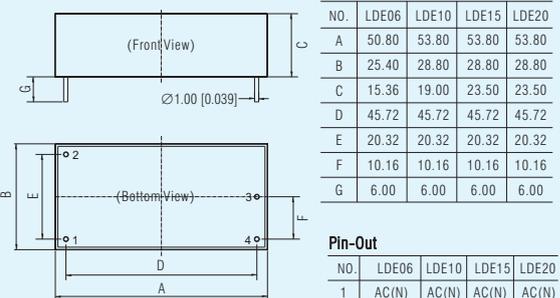

### EMC Solution-recommended Circuit

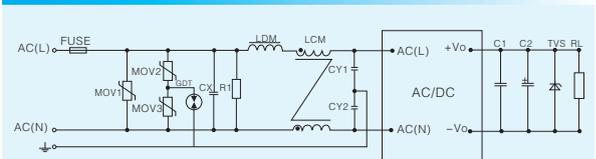

- Note: 1. LDE series meet the requirements of lightning protection. If the application requires higher performance for lightning protection and EMI, our standard products LHE series (surge level three), LH-ER2 (surge level four) and recommended peripheral circuit are available;  
2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available. For example, LDE03/LDE05 with FC-LX1D reaches to ±2KV/4KV (level four), and LDE15/LDE20 with FC-LX1D2 to ±4V/6KV;  
3. Detailed application please refer to datasheet.

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

# These series are suitable for Industrial Indoor Environment

## 3-20W Compact LD Series

UL US CE CB RoHS

### Features

- Compact size, suitable for limited dimension application
- Input voltage range: 85-264VAC/100-370VDC
- Isolation: 3000VAC/4000VAC
- Efficiency up to 83%
- Low standby power consumption, high efficiency, environment friendly
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Output short-circuit, over-current and over-voltage protections
- EN/UL60950 approval, EN60601 approval, IEC/EN/UL62368 approval (Pending)



A2S Chassis Mounting


A4S DIN-Rail Mounting

### Product Program


Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi (%) (typ)	Certification
LD03-10B03R2	3W	85-264VAC	3.3V/700mA	66	UL US CB CE (Pending) RoHS
LD03-10B05R2		85-264VAC	5V/600mA	74	
LD03-10B09R2		85-264VAC	9V/330mA	75	
LD03-10B12R2		85-264VAC	12V/250mA	77	
LD03-10B15R2		85-264VAC	15V/200mA	77	
LD03-10B24R2		85-264VAC	24V/125mA	78	
LD05-20B03	4.2W	85-264VAC	3.3V/1250mA	74	UL US CE (Pending) RoHS
LD05-20B05		85-264VAC	5V/1000mA	78	
LD05-20B09		85-264VAC	9V/550mA	78	
LD05-20B12		85-264VAC	12V/420mA	80	
LD05-20B15		85-264VAC	15V/333mA	82	
LD05-20B24		85-264VAC	24V/230mA	83	
LD10-20B03	6.6W	85-264VAC	3.3V/2000mA	71	UL US CE RoHS
LD10-20B05		85-264VAC	5V/2000mA	76	
LD10-20B09		85-264VAC	9V/1100mA	80	
LD10-20B12		85-264VAC	12V/900mA	81	
LD10-20B15		85-264VAC	15V/700mA	82	
LD10-20B24		85-264VAC	24V/450mA	83	
LD12-20B03	7.9W	85-264VAC	3.3V/2400mA	74	UL US CE RoHS
LD12-20B05		85-264VAC	5V/2400mA	78	
LD12-20B12		85-264VAC	12V/1000mA	82	
LD12-20B15		85-264VAC	15V/800mA	82	
LD12-20B24		85-264VAC	24V/500mA	83	
LD20-10B03		11.88W	85-264VAC	3.3V/3600mA	
LD20-10B05	85-264VAC		5V/3600mA	78	
LD20-10B12	85-264VAC		12V/1660mA	82	
LD20-10B15	85-264VAC		15V/1330mA	83	
LD20-10B24	85-264VAC		24V/833mA	83	

### Package Dimension

LD03 Series: LxWxH: 37.00x24.50x18.00(mm)

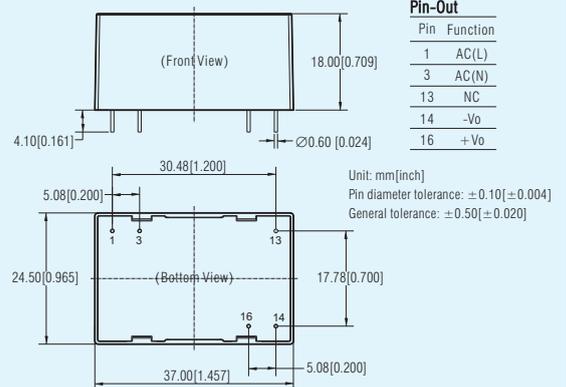


LD05/10/12/20 Series:

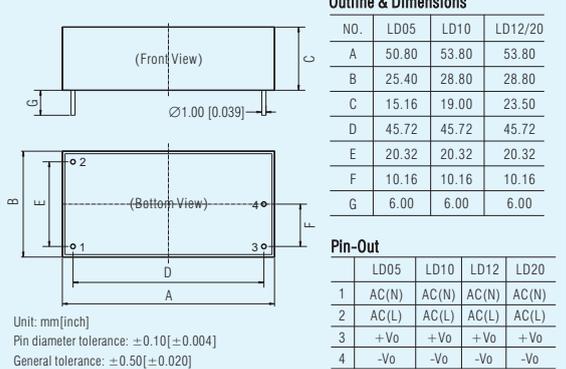

Note: A2S chassis mounting and A4S DIN-Rail mounting are available and please refer to datasheet for details.

- Note: 1.LD series meet the requirements of lightning protection. If the application requires higher performance for lightning protection and EMI, our standard products LH series(surge level three), LH-ER2(surge level four) and recommended peripheral circuit are available;  
2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available. For example, LD03/LD05 with FC-LX1D reaches to  $\pm 2KV/4KV$  (level four), and LD12/LD20 with FC-LX1D2 to  $\pm 4V/6KV$ ;  
3. Detailed application please refer to datasheet.

### EMC Solution-recommended Circuit

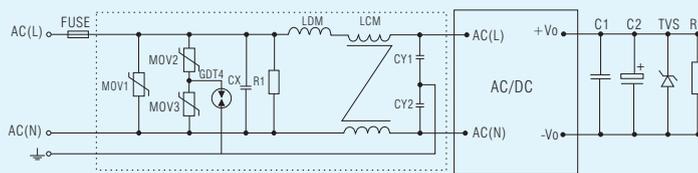

Take LD20-10Bxx as an example, others please refer to datasheet.

- This catalog is used to introduce our latest products, for more information, please contact our sales department

# These series are suitable for Industrial Indoor Environment

## 1-10W Compact 85-305VAC Wide Input Voltage LD Series

cULus CE CB RoHS

### Features

- Compact size, suitable for limited dimension application
- Input voltage range: 85-305VAC/100-430VDC
- Isolation: 3000VAC/4000VAC
- Efficiency up to 83%
- Low standby power consumption, high efficiency, environment friendly
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Output short-circuit, over-current and over-voltage protections
- IEC/UL/EN60950 approval



A2S Chassis Mounting


A4S DIN-Rail Mounting

AC/DC Converter

Product Program						
Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi (%) (typ)	Certification	
LD01-10B03	1W	85-305VAC	3.3V/300mA	63	cULus CE RoHS	
LD01-10B05		85-305VAC	5V/200mA	68		
LD01-10B09		85-305VAC	9V/111mA	72		
LD01-10B12		85-305VAC	12V/83mA	73		
LD01-10B15		85-305VAC	15V/67mA	74		
LD01-10B24		85-305VAC	24V/42mA	75		
LD02-10B03	2W	85-305VAC	3.3V/600mA	65		cULus CB CE RoHS
LD02-10B05		85-305VAC	5V/400mA	70		
LD02-10B09		85-305VAC	9V/222mA	72		
LD02-10B12		85-305VAC	12V/167mA	76		
LD02-10B15		85-305VAC	15V/133mA	76		
LD02-10B24		85-305VAC	24V/83mA	78		
LD05-23B03	4.2W	85-305VAC	3.3V/1250mA	74	cULus CB CE RoHS	
LD05-23B05	5W	85-305VAC	5V/1000mA	78		
LD05-23B09		85-305VAC	9V/550mA	78		
LD05-23B12		85-305VAC	12V/420mA	80		
LD05-23B15	85-305VAC	15V/333mA	82			
LD05-23B24	5.5W	85-305VAC	24V/230mA	83		
LD10-13B03	6.6W	85-305VAC	3.3V/2000mA	72	RoHS	
LD10-13B05	10W	85-305VAC	5V/2000mA	76		
LD10-13B09		85-305VAC	9V/1100mA	78		
LD10-13B12		85-305VAC	12V/900mA	80		
LD10-13B15		85-305VAC	15V/700mA	80		
LD10-13B24		85-305VAC	24V/450mA	80		

### Package Dimension

LD01/02/05/10 Series:

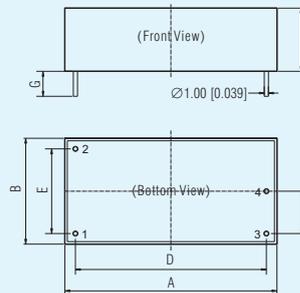

### Outline & Dimensions

NO.	LD01/02	LD05	LD10
A	33.70	50.80	53.80
B	22.20	25.40	28.80
C	18.00	15.16	19.00
D	28.00	45.72	45.72
E	15.24	20.32	20.32
F	7.62	10.16	10.16
G	6.00	6.00	6.00

### Pin-Out


	LD01/02	LD05	LD10
1	AC(N)	AC(N)	AC(N)
2	AC(L)	AC(L)	AC(L)
3	-Vo	+Vo	+Vo
4	+Vo	-Vo	-Vo

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

Note: A2S chassis mounting and A4S DIN-Rail mounting are available and please refer to datasheet for details.

### EMC Solution-recommended Circuit

Take LD05-23Bxx as an example, others please refer to datasheet.

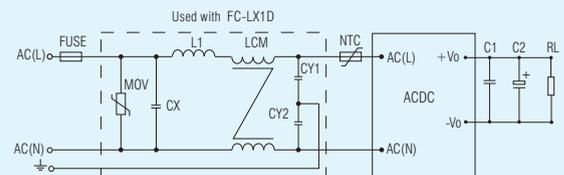

Note: 1. LD series meet the requirements of lightning protection. If the application requires higher performance for lightning protection and EMI, our standard products LH series (surge level three), LH-ER2 (surge level four) and recommended peripheral circuit are available;

2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available. For example, LD05-23B with FC-LX1D reaches to  $\pm 2KV/4KV$  (level four);

3. Detailed application please refer to datasheet.

# These series are suitable for Industrial Outdoor Environment

## 5-25W 85-305VAC Wide Input Voltage LH-13B Series

### Features

- Wide input voltage, suitable for unstable electric supply application
- Input voltage range: 85-305VAC/100-430VDC
- Operating temperature: -40°C to +70°C
- Isolation: 3000VAC
- Efficiency up to 87%
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting(TS35)
- EMI meets EN55022 CLASS B
- Output short-circuit, over-current and over-voltage protections
- IEC/UL/EN60950 approval




A2 Chassis Mounting

A4 DIN-Rail Mounting

### Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi.(%) (230VAC,typ.)	Certification	
LH05-13B03	4W	85-305VAC	3.3V/1250mA	72		
LH05-13B05	5W	85-305VAC	5V/1000mA	77		
LH05-13B09		85-305VAC	9V/550mA	79		
LH05-13B12		85-305VAC	12V/420mA	81		
LH05-13B15		85-305VAC	15V/330mA	82		
LH05-13B24		5.5W	85-305VAC	24V/230mA		84
LH10-13B03	6.6W	85-305VAC	3.3V/2000mA	70		10W
LH10-13B05	85-305VAC	5V/2000mA	76			
LH10-13B09	85-305VAC	9V/1100mA	78			
LH10-13B12	85-305VAC	12V/900mA	80			
LH10-13B15	85-305VAC	15V/700mA	81			
LH10-13B24	85-305VAC	24V/450mA	82	15W		
LH15-13B03	9.9W	85-305VAC	3.3V/3000mA			74
LH15-13B05	14W	85-305VAC	5V/2800mA			78
LH15-13B09	85-305VAC	9V/1600mA	79			
LH15-13B12	85-305VAC	12V/1250mA	82			
LH15-13B15	85-305VAC	15V/1000mA	82			
LH15-13B24	85-305VAC	24V/625mA	84			
LH15-13B48	85-305VAC	48V/320mA	85	20W		
LH20-13B03	11.55W	85-305VAC	3.3V/3500mA			75
LH20-13B05	17.5W	85-305VAC	5V/3500mA			78
LH20-13B09	85-305VAC	9V/2100mA	79			
LH20-13B12	85-305VAC	12V/1600mA	83			
LH20-13B15	85-305VAC	15V/1300mA	84			
LH20-13B24	85-305VAC	24V/850mA	85	25W		
LH25-13B03	13.5W	85-305VAC	3.3V/4100mA		75	
LH25-13B05	20.5W	85-305VAC	5V/4100mA		78	
LH25-13B09	22.5W	85-305VAC	9V/2500mA		79	
LH25-13B12	25W	85-305VAC	12V/2100mA		83	
LH25-13B15	24W	85-305VAC	15V/1600mA	84		
LH25-13B24	26.4W	85-305VAC	24V/1100mA	85		
LH25-13B48	24W	85-305VAC	48V/500mA	87		

### Package Dimension

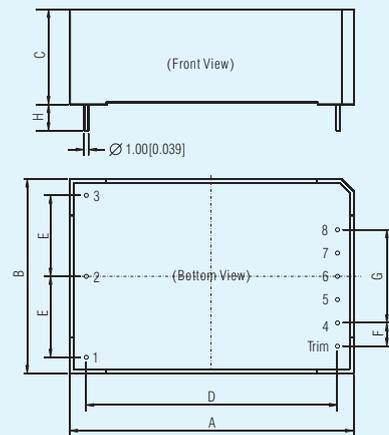

### Outline & Dimensions

NO.	LH05	LH10	LH15	LH20	LH25
A	55.00	55.00	62.00	70.00	70.00
B	45.00	45.00	45.00	48.00	48.00
C	21.00	21.00	22.50	23.50	23.50
D	40.50	47.00	54.00	62.00	62.00
E	12.50	17.50	17.50	20.00	20.00
F	-	-	-	5.75	5.75
G	16.00	20.00	20.00	23.00	23.00

### Pin-Out

Pin	LH-13B	Pin	LH-13B
1		6	No Pin
2	AC(N)	7	No Pin
3	AC(L)	8	+Vo
4	-Vo	Trim	Trim**
5	No Pin		

Unit: mm[inch]

Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$ Pin length(H):  $\geq 6.00[0.236]$ General tolerance:  $\pm 0.50[\pm 0.020]$ Note: There is no pin "1"  on LH15-13B

Trim\*\*: only for LH20/25-13B Series

A2 chassis mounting and A4 DIN-Rail mounting are available and please refer to datasheet for details.

Further developing is also available if needed.


Note: 1. LH(05-25)-13B series meet the requirements of surge level of  $\pm 1KV/2KV$ (level three). If the application requires higher performance for surge, our recommended peripheral circuit for  $\pm 2KV/4KV$ (level four) is available;

2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available.

For example, LH(05-25)-13B series with FC-LX1D reaches to  $\pm 2KV/4KV$ (level four);

3. Detailed application please refer to datasheet.

### EMC Solution-recommended Circuit

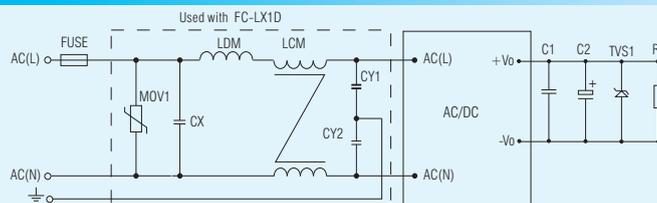

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# These series are suitable for Special Industrial Outdoor Environment (Harsh Environment)

## New generation 5-25W standard package AC/DC converter LHE series





  
 (Pending)

### Features

- Standard package, suitable for industrial control application requiring high EMC performance
- Input voltage range: 85-264VAC/100-370VDC
- Operating temperature: -40°C to +85°C
- Isolation: 4000VAC
- Efficiency up to 87%
- Low ripple & noise
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- EMI meets CISPR32/EN55032 CLASS B
- Output short-circuit, over-current and over-voltage protections
- IEC/UL/EN62368 approval (Pending)




### Product Program

Model Number	Power	Output Voltage/Current (Vo1/Io1)	Output Voltage/Current (Vo2/Io2)	Effi.(%) (typ)	Certification	
LHE05-20B03	4W	85-264VAC	3.3V/1250mA	70	    (Pending)	
LHE05-20B05	5W	85-264VAC	5V/1000mA	75		
LHE05-20B09		85-264VAC	9V/550mA	77		
LHE05-20B12		85-264VAC	12V/420mA	79		
LHE05-20B15		85-264VAC	15V/330mA	80		
LHE05-20B24	5.5W	85-264VAC	24V/230mA	82		
LHE10-20B03	6.6W	85-264VAC	3.3V/2000mA	70		
LHE10-20B05		85-264VAC	5V/2000mA	76		
LHE10-20B09		85-264VAC	9V/1100mA	78		
LHE10-20B12		85-264VAC	12V/900mA	80		
LHE10-20B15	10W	85-264VAC	15V/700mA	81		
LHE10-20B24		85-264VAC	24V/450mA	82		
LHE15-20B03		9.9W	85-264VAC	3.3V/3000mA		73
LHE15-20B05		14W	85-264VAC	5V/2800mA		76
LHE15-20B09	85-264VAC		9V/1600mA	78		
LHE15-20B12	85-264VAC		12V/1250mA	80		
LHE15-20B15	85-264VAC		15V/1000mA	80		
LHE15-20B24	15.5W	85-264VAC	24V/625mA	83		
LHE20-20B03		11.55W	85-264VAC	3.3V/3500mA		73
LHE20-20B05		15.5W	85-264VAC	5V/3100mA		77
LHE20-20B09			85-264VAC	9V/2100mA		79
LHE20-20B12	85-264VAC		12V/1600mA	81		
LHE20-20B15	85-264VAC		15V/1300mA	82		
LHE20-20B24	20W	85-264VAC	24V/850mA	84		
LHE25-20B03		13.53W	85-264VAC	3.3V/4100mA	74	
LHE25-20B05		20.5W	85-264VAC	5V/4100mA	79	
LHE25-20B09			85-264VAC	9V/2500mA	81	
LHE25-20B12	85-264VAC		12V/2100mA	83		
LHE25-20B15	25W		85-264VAC	15V/1600mA	84	
LHE25-20B24		85-264VAC	24V/1100mA	85		
LHE25-20B48		85-264VAC	48V/500mA	87		

### Package Dimension

#### LHE05/10/15/20 Series

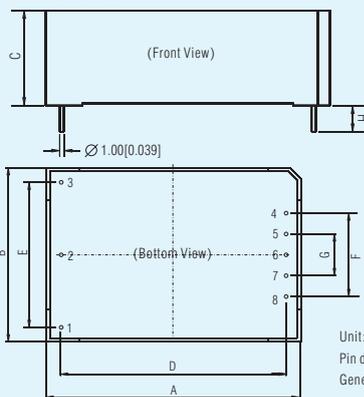

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$


#### Pin-Out

Pin	LHE05-20B	LHE10-20B	LHE15-20B	LHE20-20B
1			No Pin	No Pin
2	AC(N)	AC(N)	AC(N)	AC(N)
3	AC(L)	AC(L)	AC(L)	AC(L)
4	+Vo	+Vo	+Vo	+Vo
5	No Pin	No Pin	No Pin	No Pin
6	No Pin	No Pin	No Pin	No Pin
7	No Pin	No Pin	No Pin	No Pin
8	-Vo	-Vo	-Vo	-Vo

#### Outline & Dimensions

	LHE05	LHE10	LHE15	LHE20
NO				
A	48.50	55.00	62.00	62.00
B	36.00	45.00	45.00	45.00
C	20.50	21.00	22.50	22.50
D	40.50	47.00	54.00	54.00
E	25.00	35.00	35.00	35.00
F	16.00	10.00	20.00	20.00
G		10.00	10.00	10.00
H	6.00	6.00	6.00	6.00

#### LHE25 Series: LxWxH: 70.00x48.50x23.50(mm)

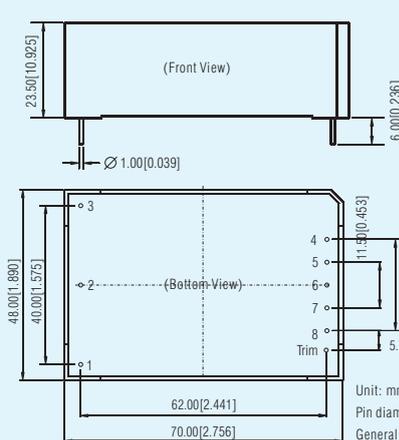


#### Pin-Out

Pin	Function
1	
2	AC(N)
3	AC(L)
4	+Vo
5	No Pin
6	No Pin
7	No Pin
8	-Vo
Trim	Trim

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

### EMC Solution-recommended Circuit

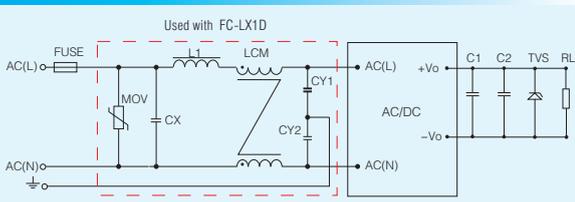

Note: 1. Standard LHE series meet the requirements of surge level of  $\pm 1KV/2KV$ (level three). If the application requires higher performance for surge, our LH-ER2 series for  $\pm 2KV/4KV$  (level four) and recommended peripheral circuit for  $\pm 2KV/4KV$ (level four) are available;  
2. If the application requires higher performance for surge, our matching EMC auxiliary devices are available. For example, standard LHE(05-25) series with FC-LX1D reaches to  $\pm 2KV/4KV$  (level four);  
3. Detailed application please refer to datasheet.

# These series are suitable for Industrial Outdoor Environment

## 5-25W Standard Package LH Series

c **UL** **US** **CE** **CB** **RoHS**

### Features

- Standard package, suitable for industrial control application requiring high EMC performance
- Input voltage range: 85-264VAC/100-370VDC
- Operating temperature: -40°C to +70°C (for the majority)
- Isolation: 3000VAC
- Efficiency up to 87%
- Low ripple & noise
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- EMI meets EN55022 CLASS B
- Output short-circuit, over-current and over-voltage protections
- IEC/UL/EN60950 approval



A2 Chassis Mounting

A4 DIN-Rail Mounting

### Product Program

Model Number	Power	Output Voltage/Current (Vo1/Io1)	Output Voltage/Current (Vo2/Io2)	Effi (%) (typ)	Certification		
LH05-10B03	4W	3.3V/1250mA		70	c <b>UL</b> <b>US</b> <b>CE</b> <b>RoHS</b>		
LH05-10B05		5V/1000mA		75			
LH05-10B09		9V/550mA		77			
LH05-10B12		12V/420mA		79			
LH05-10B15		15V/330mA		80	<b>RoHS</b>		
LH05-10B24		24V/230mA		82			
LH05-10A05		+5V/500mA	-5V/500mA	75		<b>RoHS</b>	
LH05-10A12		+12V/210mA	-12V/210mA	79			
LH05-10A15		+15V/160mA	-15V/160mA	79			
LH05-10A24		+24V/100mA	-24V/100mA	80			
LH05-10C0505-01		5W	5V/800mA	±5V/100mA	70	<b>RoHS</b>	
LH05-10C0512-01			5V/600mA	±12V/100mA	73		
LH05-10C0515-01			5V/600mA	±15V/80mA	74		
LH05-10C0524-01			5V/600mA	±24V/50mA	75		
LH05-10D0505-01			5V/900mA	5V/100mA	71	<b>RoHS</b>	
LH05-10D0512-01			5V/750mA	12V/100mA	73		
LH05-10D0515-01	5V/700mA		15V/100mA	73			
LH05-10D0524-01	5V/600mA		24V/100mA	75			
LH10-10B03	6.6W		3.3V/2000mA		70	c <b>UL</b> <b>US</b> <b>CE</b> <b>RoHS</b>	
LH10-10B05			5V/2000mA		76		
LH10-10B09			9V/1100mA		78		
LH10-10B12			12V/900mA		80		
LH10-10B15			15V/700mA		81	<b>RoHS</b>	
LH10-10B24			24V/450mA		82		
LH10-10A05			+5V/1000mA	-5V/1000mA	76		c <b>UL</b> <b>US</b> <b>CE</b> <b>RoHS</b>
LH10-10A12			+12V/450mA	-12V/450mA	80		
LH10-10A15		+15V/350mA	-15V/350mA	81			
LH10-10A24		+24V/200mA	-24V/200mA	84			
LH10-10C0512-02		10W	5V/1000mA	±12V/200mA	75	<b>RoHS</b>	
LH10-10C0515-02			5V/900mA	±15V/200mA	75		
LH10-10D0505-02			5V/1800mA	5V/200mA	75		c <b>UL</b> <b>US</b> <b>CE</b> <b>RoHS</b>
LH10-10D0512-02			5V/1500mA	12V/200mA	79		
LH10-10D0515-02			5V/1400mA	15V/200mA	79		
LH10-10D0524-02			5V/1000mA	24V/200mA	81		


- Note: 1. Standard LH series meet the requirements of surge level of ±1KV/2KV (level three). If the application requires higher performance for surge, our LH series for ±2KV/4KV (level four) and recommended peripheral circuit for ±2KV/4KV (level four) are available;
2. If the application requires higher performance for surge, our matching EMC auxiliary devices are available. For example, standard LH(05-25) series with FC-LX1D reaches to ±2KV/4KV (level four);
3. Detailed application please refer to datasheet.

### Product Program

Model Number	Power	Output Voltage/Current (Vo1/Io1)	Output Voltage/Current (Vo2/Io2)	Effi (%) (typ)	Certification		
LH15-10B03	9.9W	3.3V/3000mA		73	c <b>UL</b> <b>US</b> <b>CB</b> <b>CE</b> <b>RoHS</b>		
LH15-10B05	14W	5V/2800mA		76			
LH15-10B09		9V/1600mA		78			
LH15-10B12		12V/1250mA		80			
LH15-10B15		15V/1000mA		80			
LH15-10B24	15W	24V/625mA		84	<b>RoHS</b>		
LH15-10A05		+5V/1500mA	-5V/1500mA	76		<b>RoHS</b>	
LH15-10A12		+12V/650mA	-12V/650mA	81			
LH15-10A15		+15V/500mA	-15V/500mA	83			
LH15-10A24		+24V/310mA	-24V/310mA	83			
LH15-10C0505-05		15W	5V/2000mA	±5V/500mA	75	c <b>UL</b> <b>US</b> <b>CB</b> <b>CE</b> <b>RoHS</b>	
LH15-10C0512-02			5V/2000mA	±12V/200mA	77		
LH15-10C0515-02			5V/1800mA	±15V/200mA	78		
LH15-10C0524-01			5V/2000mA	±24V/100mA	78		
LH15-10D0505-08			5V/2200mA	5V/800mA	78	<b>RoHS</b>	
LH15-10D0512-04			5V/2000mA	12V/400mA	80		
LH15-10D0515-03			5V/2000mA	15V/300mA	81		
LH15-10D0524-02			5V/2000mA	24V/200mA	81		
LH20-10B03			13.53W	3.3V/4100mA		74	c <b>UL</b> <b>US</b> <b>CB</b> <b>CE</b> <b>RoHS</b>
LH20-10B05			17.5W	5V/3500mA		78	
LH20-10B09				9V/2100mA		80	
LH20-10B12	12V/1600mA				82		
LH20-10B15	15V/1300mA				83		
LH20-10B24	20W		24V/850mA		85	<b>RoHS</b>	
LH20-10A05			+5V/2000mA	-5V/2000mA	75		<b>RoHS</b>
LH20-10A12			+12V/830mA	-12V/830mA	82		
LH20-10A15		+15V/650mA	-15V/650mA	83			
LH20-10C0505-05		5V/2500mA	±5V/500mA	74	c <b>UL</b> <b>US</b> <b>CB</b> <b>CE</b> <b>RoHS</b>		
LH20-10C0512-04		5V/2000mA	±12V/400mA	75			
LH20-10C0515-03		5V/2000mA	±15V/300mA	76			
LH20-10C0524-02		5V/2000mA	±24V/200mA	77			
LH20-10D0512-06		5V/2500mA	12V/600mA	75	<b>RoHS</b>		
LH20-10D0515-05		5V/2500mA	15V/500mA	76			
LH20-10D0524-03		5V/2500mA	24V/300mA	77			
LH25-10B03		13.53W	3.3V/4100mA			74	c <b>UL</b> <b>US</b> <b>CB</b> <b>CE</b> <b>RoHS</b>
LH25-10B05		20.5W	5V/4100mA		79		
LH25-10B09			9V/2500mA		81		
LH25-10B12			12V/2100mA		83		
LH25-10B15			15V/1600mA		84		
LH25-10B24	24V/1100mA			85			
LH25-10B48	48V/500mA			87			

• This catalog is used to introduce our latest products, for more information, please contact our sales department

### Package Dimension

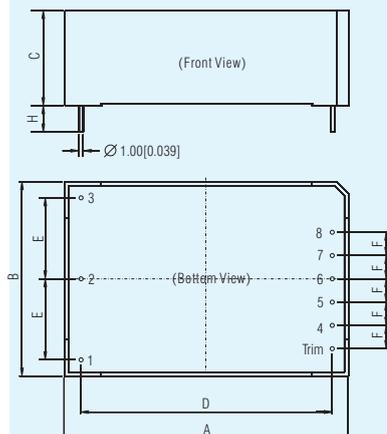

Unit: mm[inch]

Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$

Pin length(H):  $\geq 6.00 [0.236]$

General tolerance:  $\pm 0.50 [\pm 0.020]$

### Outline & Dimensions

NO.	LH05	LH10	LH15	LH20	LH25
A	48.50	55.00	62.00	70.00	70.00
B	36.00	45.00	45.00	48.00	48.00
C	20.50	21.00	22.50	23.50	23.50
D	40.50	47.00	54.00	62.00	62.00
E	12.50	17.50	17.50	20.00	20.00
F	4.01	5.00	5.00	5.75	5.75

### Pin-Out


Pin	LH-10B	LH-10A	LH-10C	LH-10D
1	$\perp$	$\perp$	$\perp$	$\perp$
2	AC(N)	AC(N)	AC(N)	AC(N)
3	AC(L)	AC(L)	AC(L)	AC(L)
4	-Vo	-Vo	-Vo1	-Vo1
5	No Pin	No Pin	+Vo1	+Vo1
6	No Pin	COM	-Vo2	No Pin
7	No Pin	No Pin	COM	-Vo2
8	+Vo	+Vo	+Vo2	+Vo2
Trim	Trim**	No Pin	No Pin	No Pin

Note: There is no pin "1"  $\perp$  on LH15-10B

Trim\*\*: only for LH20/25-10B Series

A2 chassis mounting and A4 DIN-Rail mounting are available and please refer to datasheet for details.

### EMC Solution-recommended Circuit

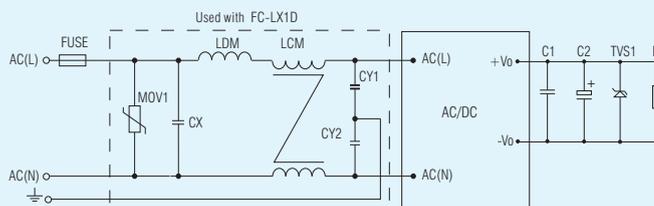

# These series are suitable for Industrial Outdoor Environment

## 40-60W Standard Package LH Series



### Features

- Standard package, suitable for industrial control application requiring high EMC performance
- Input voltage range: LH40: 85-264VAC/100-370VDC  
LH60: 90-264VAC/122-370VDC;  
(LH60-20Bxx-DT: 55-264VAC/77-370VDC)
- Operating temperature: -40°C to +70°C
- efficiency up to 86%
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Output short-circuit, over-current and over-voltage protections
- IEC/EN/UL60950 approval



A5 Chassis Mounting


A6 DIN-Rail Mounting

Model Number	Power	Output Voltage/Current (Vo/Io1)	Output Voltage/Current (Vo2/Io2)	Isolation	Certification
LH40-10B03	26.4W	3.3V/8000mA		3000VAC	
LH40-10B05	40W	5V/8000mA			
LH40-10B09		9V/4444mA			
LH40-10B12		12V/3333mA			
LH40-10B15	15V/2666mA				
LH40-10B24	24V/1667mA				
LH40-10D0512-13	40W	5VDC/5000mA	12VDC/1250mA		
LH40-10D0524-06		5VDC/5000mA	24VDC/625mA		
LH40-10A05		+5VDC/4000mA	-5VDC/4000mA		
LH40-10A12		+12VDC/1666mA	-12VDC/1666mA		
LH40-10A15		+15VDC/1333mA	-15VDC/1333mA		

Model Number	Power	Output Voltage/Current (Vo/Io1)	Max. Capacitive Load (μF)	Isolation	Certification
LH60-20B05	50W	5V/10000mA	80000	4000VAC	
LH60-20B05-DT					
LH60-20B09	60W	9V/6600mA	28000		
LH60-20B09-DT					
LH60-20B12		12V/5000mA	14000		
LH60-20B12-DT					
LH60-20B15		15V/4000mA	12000		
LH60-20B24		24V/2500mA	4000		
LH60-20B24-DT					
LH60-20B48		48V/1250mA	1000		

Note: 1. LH40 meets the requirements of surge level of  $\pm 1KV/2KV$  (level three). If the application requires higher performance for surge, our recommended peripheral circuit for  $\pm 2KV/4KV$  (level four) is available;  
2. LH60 meets the requirements of surge level of  $\pm 2KV/4KV$  (level four). If the application requires higher performance for surge, our recommended peripheral circuit for  $\pm 4KV/6KV$  is available;  
3. Detailed application please refer to datasheet.

### Package Dimension LxWxH: 89.00x63.50x25.00(mm)

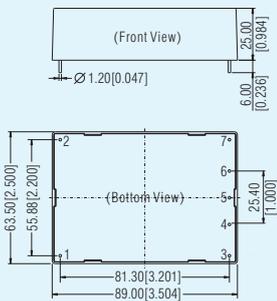


Pin	LH40-10A	LH40-10B	LH40-10D
1	AC(L)	AC(L)	AC(L)
2	AC(N)	AC(N)	AC(N)
3	+Vo	+Vo	+Vo2
4	No Pin	No Pin	+Vo1
5	CDM	-Vo	-Vo2
6	No Pin	No Pin	-Vo1
7	-Vo	Trim	No Pin

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

Note: A5 chassis mounting and A6 DIN-Rail mounting are available and please refer to datasheet for details.


### LH60 PACKAGE DIMENSION LxWxH: 109.00x58.50x30.00(mm)

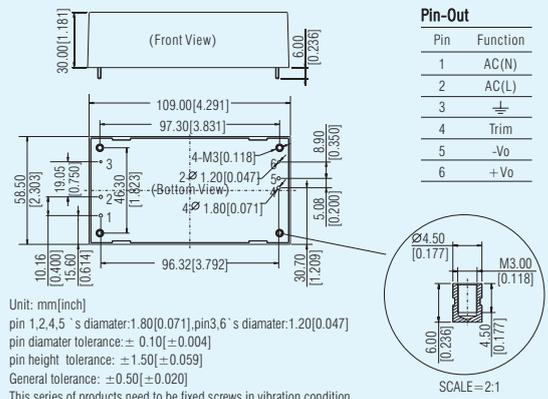

Unit: mm[inch]  
pin 1,2,4,5's diameter: 1.80[0.071], pin 3,6's diameter: 1.20[0.047]  
pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
pin height tolerance:  $\pm 1.50[\pm 0.059]$   
General tolerance:  $\pm 0.50[\pm 0.020]$   
This series of products need to be fixed screws in vibration condition.

### EMC Solution-recommended Circuit

e.g.: LH60-20Bxx, for others please refer to datasheet.

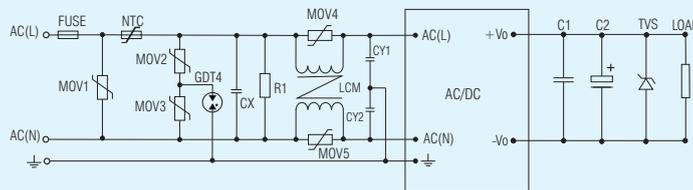

# These series are suitable for Industrial Outdoor Environment

## 120-240W DIN35 Package LI Series

c **UL** **US** **CE** **CB** **RoHS**

### Features


- Great power DIN-Rail power supply, suitable for industrial control, instrumentation and railway applications
- Input voltage range: LI120:85-264VAC/100-370VDC  
LI240:85-264VAC/120-370VDC  
Operating temperature: -25°C to +70°C
- Isolation: 3000VAC
- Active PFC
- Input under-voltage, output short-circuit, over-current, over-voltage and over-temperature protections
- IEC/EN/UL60950 approval



### Product Program


Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi(%) (typ)	Certification
LI120-10B12	120W	85-264VAC	12V/10000mA	89	c <b>UL</b> <b>US</b> <b>CE</b> <b>CB</b> <b>RoHS</b>
LI120-10B24		85-264VAC	24V/5000mA	92	c <b>UL</b> <b>US</b> <b>CE</b> <b>CB</b> <b>RoHS</b>
LI120-10B48		85-264VAC	48V/2500mA	93	c <b>UL</b> <b>US</b> <b>CE</b> <b>CB</b> <b>RoHS</b>
LI240-10B24	240W	85-264VAC	24V/10000mA	92	c <b>UL</b> <b>US</b> <b>CE</b> <b>CB</b> <b>RoHS</b>
LI240-10B48		85-264VAC	48V/5000mA	93	c <b>UL</b> <b>US</b> <b>CE</b> <b>CB</b> <b>RoHS</b>

### LI120 Package Dimension LxWxH: 125.00x35.00x112.70(mm)

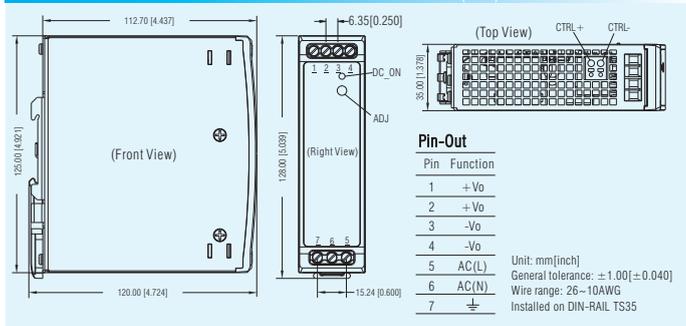

### LI240 Package Dimension

LxWxH: 125.00x60.00x120.00(mm)

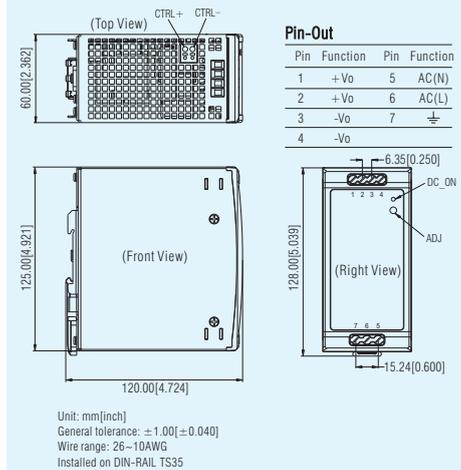

# These series are suitable for Industrial Outdoor Environment

## 30W Four Outputs Metal Mask LM Series Specialized for Protective Relaying System


**RoHS**

### Features

- EMC: EMI CLASS B; ±2KV/4KV surge (level 4)
- Input voltage range: 85-264VAC/100-370VDC
- Isolation: 2000VAC
- Low standby power consumption, high efficiency
- Low ripple & noise
- Multiplexed outputs, metal mask
- Output short-circuit, over-current and over-voltage protections



### Package Dimension LxWxH: 105.00x70.00x24.50(mm)

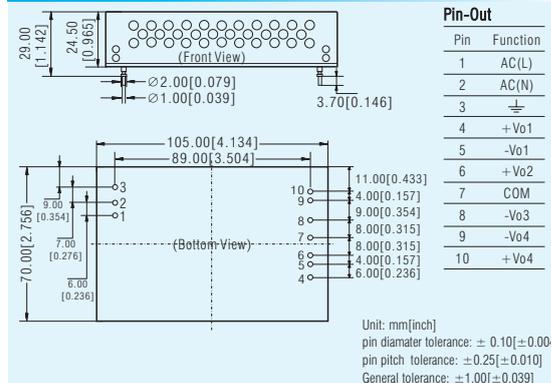


### Product Program

Model Number	Power	Input Voltage Range	Output Voltage (VDC)	Certification
LM30-00J0512-03E	30W	85-264VAC, 100-370VDC	5/±12/24	<b>RoHS</b>

Note: 1. LM series meet the requirements of ±2KV/4KV surge level(level four). If the application requires higher performance for surge, our recommended peripheral circuit for ±4KV/6KV is available;  
2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available. For example, series with FC-L01D2 reaches to ±4KV/6KV;  
3. Detailed application please refer to datasheet.

### EMC Solution-recommended Circuit

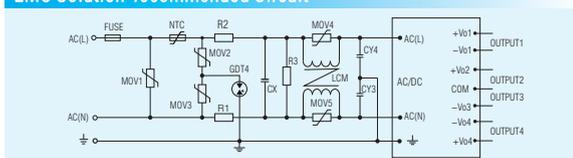

# These series are suitable for Special Industrial Indoor Environment

## 5W Compact Size LD05-MU Series for Medical

### Features

- EN60601-1, ANSI/AAMI ES60601-1 approval (2xMOPP)
- Input voltage range: 85-264VAC/100-370VDC
- Operating temperature: -25°C to +70°C
- Isolation: 4000VAC
- Ripple & noise: 50mV(Typ.)
- Optional packages: PCB mounting
- Output short-circuit, over-current and over-voltage protections




### Product Program


Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi.(%) (typ)	Certification
LD05-20B05MU	5W	85-264VAC	5V/1000mA	76	
LD05-20B12MU		85-264VAC	12V/420mA	80	
LD05-20B15MU		85-264VAC	15V/333mA	81	
LD05-20B24MU	5.5W	85-264VAC	24V/230mA	81	

Note: 1. LD05-20BxxMU series meet the requirements of  $\pm 1$  KV surge level. If the application requires  $\pm 2$  KV/4KV, our EMC solution-recommended circuit is available as follows:  
 2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available. For example, series with FC-LX1D reaches to  $\pm 2$  KV/4KV;  
 3. Detailed application please refer to datasheet.

### EMC Solution-recommended Circuit

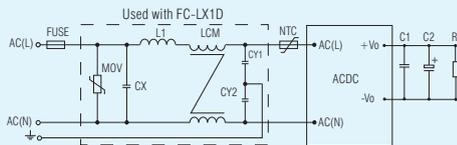

### Package Dimension LxWxH: 53.80x28.80x19.00(mm)

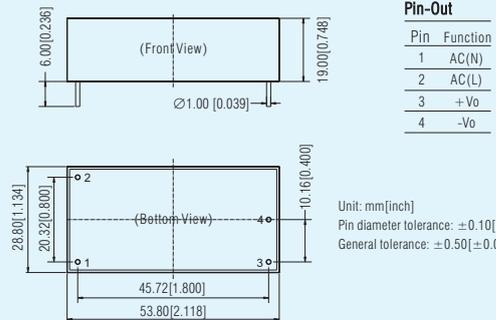

Note: A2S chassis mounting and A4S DIN-Rail mounting are available and please refer to datasheet for details. Further developing is also available if needed.

# These series are suitable for Special Industrial Indoor Environment

## 15-25W Low Power Consumption AC/DC LH-MU Series for Medical

### Features

- IEC60601-1, EN60601-1, ANSI/AAMI ES60601-1, CAN/CSA-C22.2 No. 60601-1 approval(2xMOPP)
- Input voltage range: 85-264VAC/100-370VDC
- Operating Temperature: -40°C to +70°C
- Isolation: 4000VAC
- Operating elevation: 5000m
- Low standby power consumption: <0.1W
- Low leakage current: <100uA
- Output short-circuit, over-current and over-voltage protections
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting (TS35)




### Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi.(%) (typ)	Certification
LH15-20B05MU	14W	85-264VAC	5V/2800mA	78	
LH15-20B12MU	15W	85-264VAC	12V/1250mA	83	
LH15-20B15MU		85-264VAC	15V/1000mA	83	
LH15-20B18MU		85-264VAC	18V/833mA	84	
LH15-20B24MU	85-264VAC	24V/625mA	86		
LH25-20B05MU	20.5W	85-264VAC	5V/4100mA	82	
LH25-20B12MU	25W	85-264VAC	12V/2100mA	88	
LH25-20B15MU		85-264VAC	15V/1600mA	88	
LH25-20B18MU		85-264VAC	18V/1400mA	88	
LH25-20B24MU	85-264VAC	24V/1100mA	89		

Note: LH-MU series meet the requirements of  $\pm 1$  KV/2KV surge level (level three). If the application requires higher performance, our EMC solution-recommended circuit is available.

### Package Dimension

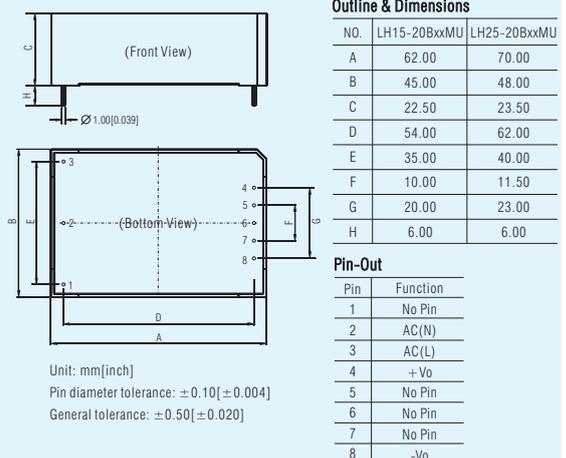

Note: A2S chassis mounting and A4S DIN-Rail mounting are available and please refer to datasheet for details.

• This catalog is used to introduce our latest products, for more information, please contact our sales department


# These series are suitable for Industrial Indoor Environment

## 10W Seven outputs Open Frame LO Series Specialized for Flow meter

RoHS

### Features

- Seven outputs specialized for flow meter application, various outputs customization acceptable
- Input voltage range: 85-264VAC, 50/60HZ
- Isolation: 3000VAC
- Low ripple & noise
- EMC: Conduction/Radiation: CLASS B, Burst/Surge: level 4
- Output short-circuit protection

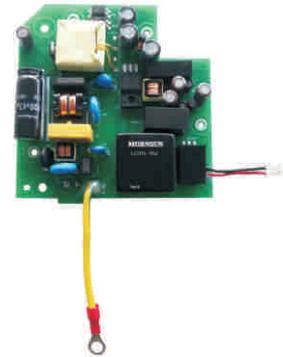


### Product Program

Model Number	Power	Input Voltage Range	Output Available (Vo1/Vo2/Vo3)	Output Available (Vo4/Vo5)	Output Available (Vo6/Vo7)
LO10-10J	10W	85-264VAC/ 120-370VDC	Triple outputs (3.3V-24V) available	Positive and negative voltage (±5V to ±24V) available	Positive and negative voltage (±5V to ±70V) available

Note: Seven or less outputs products customization is acceptable. For more information, please contact our sales department.

### Package Dimension LxWxH: 94.50x90.00x15.00(mm)

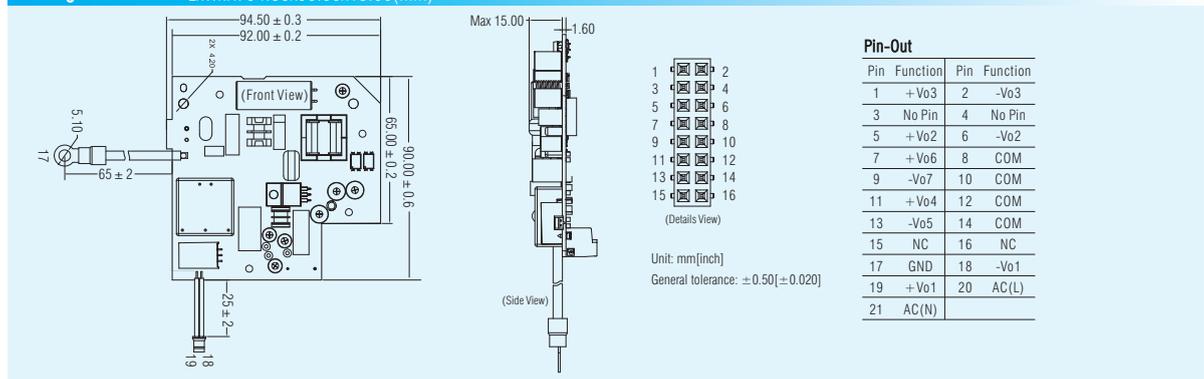

# These series are suitable for Industrial Outdoor Environment

## 10W Open Frame LO Series Specialized for Electric Power

RoHS

### Features

- Specialized for electric-meter application, EMI CLASS B with ±2KV surge
- Input voltage range: 30-280VAC/30-400VDC
- Isolation: 4000VAC
- High efficiency, high reliability
- Low ripple & noise, low standby power consumption
- Long-longevity, low-impedance electrolytic capacitors
- Output short-circuit and over-voltage protections
- Gild pin, customization acceptable




### Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current(Vo/Io)	Effi(%) (typ)	Certification
LO10-24B05K	6W	30-280VAC, 30-400VDC	5V/1200mA	71	RoHS
LO10-24B12K	6.6W	30-280VAC, 30-400VDC	12V/550mA	77	
LO10-24B13K	6.5W	30-280VAC, 30-400VDC	13V/500mA	77	

Note: 3.3-48V output customization is acceptable.

### Package Dimension LxWxH: 80.00x40.00x30.00(mm)

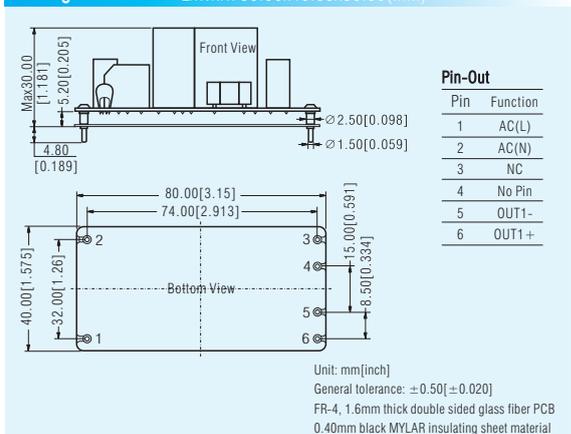

## These series are suitable for Industrial Outdoor Environment

### 10-15W Dual Outputs 528V Input Voltage Open Frame LO Series Specialized for Electric Power

RoHS

#### Features

- four-wire system available
- Ultra-wide input voltage range: 57-528VAC/80-745VDC
- EMC: Burst/Surge: level 4
- Conduction/Radiation: CLASS B
- Output short-circuit, over-current and over-voltage protections
- Multiple outputs, customization acceptable





#### Product Program

Model Number	Power	Output Voltage/Current (Vo1/Io1)	Output Voltage/Current (Vo2/Io2)	Effi(%) (typ)	Certification
L010-26D0512-04L	10.92W	5.1V/1.2A	12V/0.4A	78	RoHS
L015-26D1212-03	13.2W	12V/0.8A	12V/0.3A	77	
L015-26D1305-03	15W	13.5V/1.0A	5V/0.3A	78	

Note: 1. 05V/24A and 05V/15A outputs customization is acceptable.

2. If the application requires higher performance for EMC, our recommended peripheral circuit is available.

#### Package Dimension LxWxH: 80.00x40.00x35.00(mm)

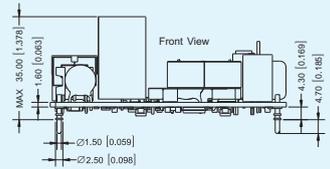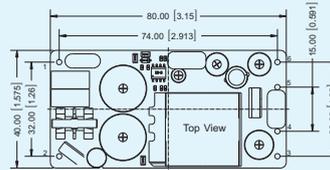

Unit: mm[inch]

General tolerance:  $\pm 0.50[\pm 0.020]$

FR-4, 1.6mm thick double sided glass fiber PCB

Pin	Name	Function Define
1	AC(L)	AC voltage line wire(L wire) or DC voltage positive
2	AC(N)	AC voltage neutral wire(N wire) or DC voltage negative
3	+V02	The second output positive(+)
4	-V02	The second output negative(-)
5	-V01	The first output voltage negative(-)
6	+V01	The first output voltage positive(+)

## These series are suitable for Industrial Outdoor Environment

### 20-30W Three Outputs Open Frame AC/DC Converters Specialized for AC Charging Station


RoHS

#### Features

- Input voltage range: 165-264VAC/230-370VDC
- Isolation: 3000VAC
- Three outputs, high accuracy
- Efficiency up to 78%
- Output short-circuit, over-current and over-voltage protections
- Safety Class: CLASS II
- Meet IEC 60950




#### Package Dimension LxWxH: 70.00x48.01x23.00(mm)

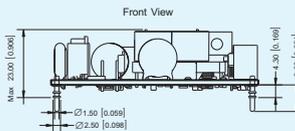

Unit: mm[inch]

General tolerance:  $\pm 0.50[\pm 0.020]$

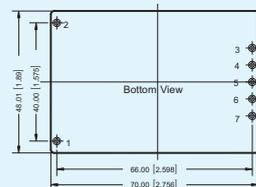

Pin	Name	Function Define
1	AC(L)	AC voltage line wire(L wire) or DC voltage positive
2	AC(N)	AC voltage neutral wire(N wire) or DC voltage negative
3	-V01	The first output voltage negative(-)
4	+V01	The first output positive(+)
5	-V02	The second output negative(-)
6	COM	The second output common part
7	+V02	The second output voltage positive(+)

# These series are suitable for Industrial Outdoor Environment

## 10-25W LH-ER2 Series Specialized for Electric Power

### Features

- Specialized for electric power application, excellent EMS performance with  $\pm 2KV/\pm 4KV$  surge(level four)
- Input voltage range: 85-264VAC/100-370VDC
- Isolation: 3000VAC
- Efficiency up to 85%
- Safety Class: CLASS I
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Output short-circuit and over-current protections

### Product Program

Model Number	Power	Output Voltage/Current(Vo1/Io1)	Output Voltage/Current(Vo2/Io2)	Effi.(%)(typ)	Certification
LH10-10B05ER2	10W	5V/2000mA		74	RoHS
LH10-10B12ER2		12V/900mA		79	
LH10-10B24ER2		24V/450mA		81	
LH10-10D0505-02ER2		5V/1800mA	5V/200mA	75	
LH10-10D0512-02ER2		5V/1500mA	12V/200mA	77	
LH10-10D0524-02ER2		5V/1000mA	24V/200mA	77	
LH15-10B05ER2	15W	5V/2800mA		76	RoHS
LH15-10B12ER2		12V/1250mA		80	
LH15-10B24ER2		24V/650mA		83	
LH15-10D0512-04ER2		5V/2000mA	12V/400mA	80	
LH15-10D0524-02ER2		5V/2000mA	24V/200mA	80	
LH25-10B05ER2		25W	5V/4100mA		
LH25-10B12ER2	12V/2100mA			83	
LH25-10B15ER2	15V/1600mA			84	
LH25-10B24ER2	24V/1100mA			85	

Note: 1. LHxx-10BxxER2 and LHxx-10DxxER2 series meet the requirements of  $\pm 2KV/4KV$  surge level (level four). If application requires for  $\pm 4KV/6KV$ , our EMC solution-recommended circuit is available as follows;  
 2. If the application requires higher performance for lightning protection, our matching EMC auxiliary devices are available. For example, series with FC-L01D2 reaches to  $\pm 4KV/6KV$ ;  
 3. Detailed application please refer to datasheet.



### Package Dimension

Unit: mm[inch]  
 Pin length(H):  $\geq 6.00[0.236]$   
 Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
 General tolerance:  $\pm 0.50[\pm 0.020]$

Note: Trim\*\*: only for LH20/25-13B Series.  
 A2 chassis mounting and A4 DIN-Rail mounting are available and please refer to datasheet for details.


#### Pin-Out

Pin	LH-10B	LH-10D
1	⏏	⏏
2	AC(N)	AC(N)
3	AC(L)	AC(L)
4	-Vo	-Vo1
5	No Pin	+Vo1
6	No Pin	No Pin
7	No Pin	-Vo2
8	+Vo	+Vo2
Trim	Trim**	No Pin

#### Outline & Dimensions

NO.	LH10	LH15	LH25
A	62.00	62.00	70.00
B	45.00	45.00	48.00
C	30.00	30.00	30.00
D	54.00	54.00	62.00
E	17.50	17.50	20.00
F	5.00	5.00	5.75
G	12.50	12.50	12.50

### EMC Solution-recommended Circuit

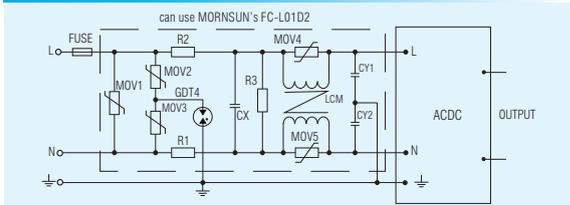

# These series are suitable for Special Industrial Outdoor Environment (Harsh Environment)

## 300W Three Outputs Battery Charging MBP Series

### Features

- Specialized for distribution automation system, power permanent magnet switch controller and power cabinets, etc.
- With 24V battery charging function and 220V capacitor charging function
- Operating temperature: -40°C to +70°C
- Max. instantaneous power up to 340W at 220V
- Compact size
- Efficiency up to 80%
- Output short-circuit and over-voltage protections
- EFT/Surge: level 4
- Metal mask, terminal wiring, easy installation

### Product Program

Model Number	Power	Nominal Output Voltage and Current			Maximum Output Power	Certification
		(Vo1/Io1)	(VB/IB)	(Vo2/Io2)		
MBP300-2A27D27220	62.5W	27V/1.0A	27V/0.5A	220V/0.1A	340W	RoHS



### Package Dimension LxWxH: 200.00x112.00x45.00(mm)

Unit: mm[inch]  
 Pin diameter tolerance:  $\pm 1.0[\pm 0.040]$   
 Connection range: 28-12AWG

Pin	Function
1	AGL
2	⏏
3	ACN
4	-Vo1/B-
5	B+
6	+Vo1
7	NC
8	+Vo2
9	-Vo2
10	NC

# These series are suitable for Special Industrial Outdoor Environment (Harsh Environment)

## 100W 165-265VAC Input Voltage Capacitor Charging MCP Series

### Features

- Specialized for distribution automation system, power magnet switch controller, electric network cabinet and other electrical equipment applications; with ultra-capacitor charging function
- Operating temperature: -40°C to +75°C
- Isolation: 3000VAC
- Efficiency up to 85%
- Continuous adjustable output voltage
- Chassis mounting
- MTBF > 100,000 H




RoHS

### Product Program

Model Number	Power	Output Voltage/Current (Vo1/Io1)	Output Voltage/Current (Voc/Ioc)	Certification
MCP100-2A27D27	100W	27V/1.5A	27V/3A	RoHS

Note: customization is acceptable.

### Package Dimension LxWxH: 168.00x79.00x28.00(mm)

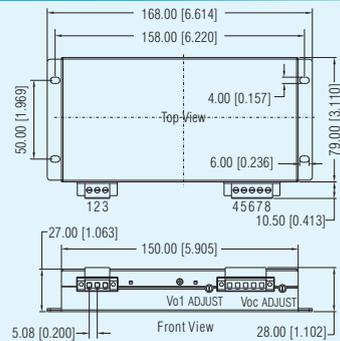

### Pin-Out

Pin	Function
1	AC(L)
2	⊥
3	AC(N)
4	K
5	+Vo1
6	-Vo1
7	-Voc
8	+Voc

Unit: mm[inch]

General tolerance: ±1.00[±0.039]

Wire range: 28-12AWG

# These series are suitable for Special Industrial Outdoor Environment (Harsh Environment)

## 350W/540W 165-264VAC Input Voltage Battery Charging MBP Series

### Features

- Specialized for distribution automation system, power distribution automation system, intelligent power box-type substation and RMU applications; with lead-acid battery charging function
- Operating temperature: -40°C to +70°C
- Efficiency up to 85%
- Low standby power consumption, meet DL/T721-2013 standard
- Chassis mounting
- Charging&discharging management function, battery activation function
- Output over-current and over-voltage protections



RoHS


### Product Program

Model Number	Long-Term Power	Transient power	Load Voltage /Current	Floating charging voltage/ Charging current	Certification
MBP300-2A27D27	108W	350W/30s, 432W/1s	27V/3A	27V/1A	RoHS
MBP500-2A27D27L	162W	540W/30s, 702W/1s	27V/4.5A	27V/1.5A	
MBP500-2A54D54L	135W	540W/30s, 702W/1s	54V/1A	54V/1.5A	
MBP300-2A27D27M	40.5W	270W/15s, 432W/1s	27V/1A	27V/0.5A	

Note: 48V output customization is acceptable.



### Package Dimension LxWxH: 168.00x110.00x45.00(mm)

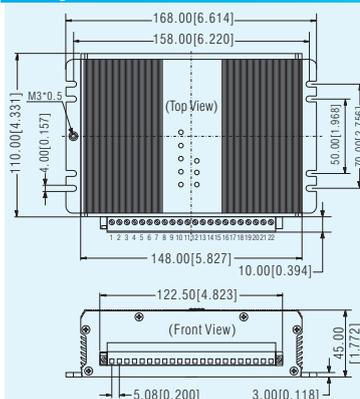

### Pin-Out


Pin	Function	Pin	Function
1	ACL	12	BG
2	PE	13	RL
3	ACN	14	VG
4	NC	15	Vo-
5	VC	16	Vo-
6	POK	17	Vo+
7	HOK	18	Vo+
8	VL	19	B+
9	VH	20	B+
10	HK	21	B-
11	KG	22	B-

Unit: mm[inch]

Pin diameter tolerance: ±1.00[±0.040]

Wire range: 28-12AWG

### MBP300-2A27D27M LxWxH: 168.00x79.00x28.00(mm)

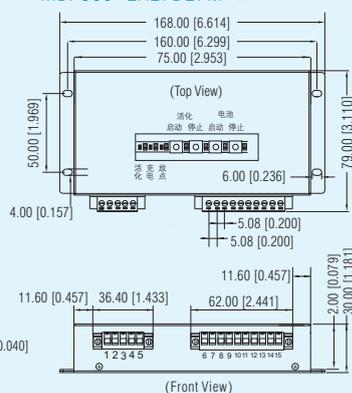

### Pin-Out

Pin	Function	Pin	Function
1	PE	9	VC
2	NC	10	HK
3	ACL	11	HG
4	ACN	12	Vo+
5	NC	13	Vo-
6	POK	14	B-
7	HOK	15	B+
8	VL		


Unit: mm[inch]

Wire range: 28-12AWG

Tightening torque: Max 0.4 N·m

Pin diameter tolerance: ±2.00[±0.079]

• This catalog is used to introduce our latest products, for more information, please contact our sales department



# DC/DC Converter

1. 5-40W ultra-wide input voltage PV series .....	47-48
2. 45W 150-1500VDC Ultra-wide Input Voltage Caged Power Supply Specialized for SVG .....	48
3. 200W New Energy 200-1500VDC Ultra-wide input voltage converter ... .....	49
4. 1W Fixed Input Voltage, Isolated & Unregulated Output Series .....	50
5. HK Series Specialized for Intelligent Instrument .....	50
6. 1W Fixed Input Voltage, Isolated & Unregulated Output Series Specialized for BMS .....	51
7. 1-2W Fixed Input Voltage, Isolated & Unregulated Output G/H_S Series Specialized for Medical .....	52
8. 1-2W Fixed Input Voltage, 1500VDC Isolated & Unregulated Output Series.....	53
9. 0.25-3W Fixed Input Voltage, 1500VDC Isolated & Unregulated Output Series.....	54-60
10. 0.75-2W Fixed Input Voltage, Isolated & Regulated Output Series..	61
11. 0.5-2A Non-isolated Switching Regulator.....	62-63
12. 1-50W 2:1 Wide Input Voltage, Isolated & Regulated Output Series... .....	64-79
13. 20W Ultra-wide Input Voltage, 1500VDC Isolated & Regulated Output Series.....	65
14. DC/DC Converter Specialized for Super-capacitor and Lithium Battery-powered.....	73
15. 75-200W 4:1 Wide Input Voltage, 2250VDC Isolated & Regulated URF_QB-R3 .....	80
16. 6-40W 4:1 Wide Input Voltage, 2250VDC Isolated & Regulated Output Series for Railway.....	81
17. 50-150W Wide Input Voltage, 3000VDC Isolated & Regulated Output Series for Railway.....	82

# 5-15W 100-1000VDC Ultra-wide Input Voltage Isolated & RoHS regulated output series

## Features

- Ultra-wide input voltage, suitable for PV & HVC applications
- 10:1 ultra-wide input voltage range: 100-1000VDC
- Operating temperature: -40°C to +70°C
- Isolation: 4000VAC
- Efficiency up to 80%
- High reliability, 3 years warranty
- Input reverse voltage, output over-voltage and short-circuit protections
- EN62109 approval



A2C Chassis Mounting




A4C DIN-Rail Mounting

## Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi(%) (typ)	Certification
PV05-27B05R2	5W	100-1000VDC	5V/1000mA	72	
PV10-27B05R2	10W		5V/2000mA	72	
PV10-27B09R2		100-1000VDC	9V/1110mA	76	
PV10-27B24R2	24V/420mA		80		
PV15-27B12R2	15W	100-1000VDC	12V/1250mA	77	
PV15-27B15R2			15V/1000mA	78	
PV15-27B24R2			24V/625mA	80	

Note: Detailed application please refer to datasheet.

## Package Dimension LxWxH: 70.00x48.00x23.50(mm)

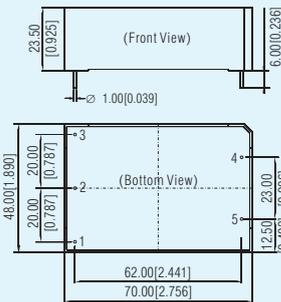

## Pin-Out

Pin	Function
1	NC
2	-Vin
3	+Vin
4	+Vo
5	-Vo

NC: No connection.

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

Note: A2 chassis mounting and A4 DIN-Rail mounting are available and please refer to datasheet for details.

# 40W 200-1200VDC Ultra-wide Input Voltage Isolated & RoHS regulated output series

## Features

- Ultra-wide input voltage, suitable for PV & HVC applications
- 6:1 ultra-wide input voltage range: 200-1200VDC
- Operating temperature: -25°C to +70°C
- Isolation: 4000VDC
- Efficiency up to 84%
- High efficiency, low ripple & noise
- Optional packages: chassis mounting, Din-Rail mounting
- Input under-voltage, reverse voltage, output over-voltage and short-circuit protections



A5 Chassis Mounting




A6 DIN-Rail Mounting

## Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi(%) (typ)	Certification
PV40-27B12	40W	200-1200VDC	12V/3330mA	83	
PV40-27B15			15V/2670mA	84	
PV40-27B24			24V/1670mA	84	

Note: Detailed application please refer to datasheet.

## Package Dimension LxWxH: 89.00x63.50x25.00(mm)

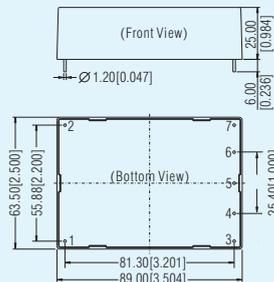

## Pin-Out

Pin	Function
1	-Vin
2	+Vin
3	+Vo
4	No pin
5	-Vo
6	No pin
7	NC

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

Note: A5 chassis mounting and A6 DIN-Rail mounting are available and please refer to datasheet for details.

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# 15-40W 200-1500VDC Ultra-wide Input Voltage Isolated Series



## Features

- Ultra-wide input voltage, suitable for PV & HVC applications
- 7.5:1 ultra-wide input voltage range: 200-1500VDC
- Isolation: 4000VDC
- Efficiency up to 80%
- High reliability, 3 years warranty
- Input under-voltage, reverse input voltage, output over-current and short-circuit protections
- UL 1741/CSA-C22.2 No.107.1, EN62109 approval
- Compact size and cost-effective PV15-29BxxL series available




## Product Program

Model Number	Power	Input Voltage Range	Output Voltage/Current (Vo/Io)	Effi (%) (typ)	Certification
PV15-29B05	10W	200-1500VDC	5V/2000mA	64	
PV15-29B12	15W		12V/1250mA	71	
PV15-29B15		200-1500VDC	15V/1000mA	72	
PV15-29B24	24V/625mA		74		
PV40-29B12	40W	200-1500VDC	12V/3330mA	76	
PV40-29B15			15V/2670mA	78	
PV40-29B24			24V/1670mA	80	
PV15-29B05L	10W	200-1500VDC	5V/2000mA	70	
PV15-29B12L	15W		12V/1250mA	76	
PV15-29B15L		200-1500VDC	15V/1000mA	77	
PV15-29B24L	24V/625mA		79		

Note: Series with suffix DIN-Rail A8 package offer built-in 1500VDC fuse and EMC circuit and with A10 are standard DIN-Rail package.

## Package Dimension

PV15/40-29Bxx Series LxWxH: 125.00x75.00x40.00(mm)

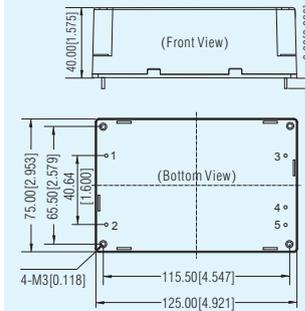


### Pin-Out

Pin	Function
1	-Vin
2	+Vin
3	NC
4	-Vo
5	+Vo

Unit: mm[inch]  
 Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
 pin height tolerance:  $\pm 1.50[\pm 0.059]$   
 General tolerance:  $\pm 0.50[\pm 0.020]$   
 This series of products need to fix screws in the haid vibration

PV15-29BxxL Series LxWxH: 109.00x58.50x30.00(mm)

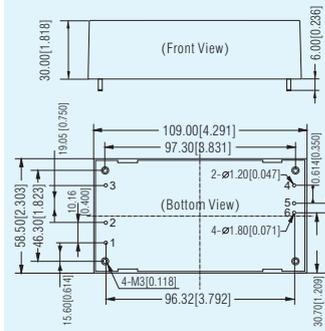

### Pin-Out

Pin	Function	Pin	Function
1	+Vin	4	NC
2	-Vin	5	-Vo
3	NC	6	+Vo

Unit: mm[inch]  
 Pin 1, 2, 5, 6's diameter: 1.80[0.071],  
 Pin 3, 4's diameter: 1.20[0.047]  
 Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$   
 pin height tolerance:  $\pm 1.50[\pm 0.059]$   
 General tolerance:  $\pm 0.50[\pm 0.020]$   
 This series of products need to be fixed with screws in vibration condition.

# 45W 150-1500VDC Ultra-wide Input Voltage Caged Power Supply Specialized for SVG

RoHS

## Features

- Specialized for SVG application with input under-voltage, reverse input voltage, output short-circuit and over-voltage protections
- 10:1 ultra-wide input voltage range: 150-1500VDC
- Operating temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Isolation: 4000VAC
- High reliability, long longevity
- Input under-voltage, reverse input voltage, output over-current and short-circuit protections
- High 78% efficiency low ripple & noise
- Meet 5000m altitude requirements




## Product Program

Model Number	Power	Input Voltage Range(Optional)	Output Voltage/Current (Vo/Io)	Output Voltage Range	Certification
PV45-29D1515-15	45W	150-1500VDC	15V/1.53A 15V/1.53A	12V/15V/24V double outputs customization acceptable	
PV45-29D1505-10	45W	150-1500VDC	15V/2.66A, 5V/1A		
PV45-29D1508-06	45W	150-1500VDC	15V/2.66A, 8V/0.625A		

Note: 1500VDC input with 12V/15V/24V double output customization is acceptable.

Package Dimension LxWxH: 144.5.00x105.00x40.00(mm)

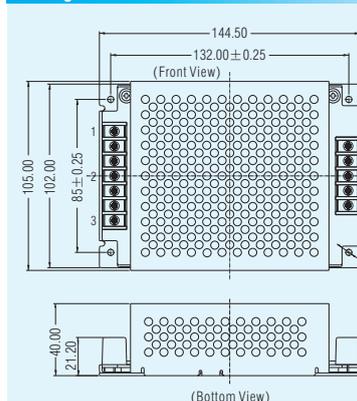

### Pin-Out

Pin	Function
1	-Vin
2	+Vin
3	⊥
4	-Vo2
5	+Vo2
6	-Vo1
7	+Vo1

Unit: mm[inch]  
 Wire range: 22-12AWG, 4.0mm<sup>2</sup>  
 Tightening torque: Max 0.4 N-m  
 Pin diameter tolerance:  $\pm 1.00[\pm 0.039]$

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

# 200W New Energy 200-1000VDC Ultra-wide input voltage converter



## Features

- Ultra-wide input voltage range:200 - 1000VDC
- Isolation:4000VAC
- Industrial operating temperature: -40°C to +70°C
- High efficiency, low ripple & noise
- Input reverse voltage, output short-circuit, over-current and over-voltage protections
- High reliability, long longevity
- EN62109 approval(pending)



## Product Program

Model Number	Power	Output Voltage/Current (Vo/Io)	Effi(%) (typ)	Max.Capacitive Load (μF)
PV200-27B12	120W	12V/10A	86	2000
PV200-27B15	150W	15V/10A	87	
PV200-27B24	200W	24V/8.4A	87	
PV200-27B26		26V/7.7A	87	
PV200-27B48		48V/4.2A	87	1000

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

## Package Dimension LxWxH: 168.00x110.00x45.00(mm)

**Pin-Out**

Pin	Function	Pin	Function
1	VIN+	12	NC
2	NC	13	NC
3	NC	14	NC
4	VRF	15	NC
5	NC	16	NC
6	NC	17	Vo-
7	PE	18	Vo-
8	NC	19	Vo-
9	NC	20	Vo+
10	NC	21	Vo+
11	NC	22	Vo+

Unit: mm[inch]  
Pin diameter tolerance: ±1.00[±0.039]  
Wire range: 28-12AWG

# 200W 300-1500VDC New Energy Ultra Wide& High Input Voltage Converter



## Features

- Ultra-wide input voltage range:300 - 1500VDC
- Isolation:4000VAC
- Industrial operating temperature: -40°C to +70°C
- High efficiency, low ripple & noise
- Input reverse voltage, output short-circuit, over-current and over-voltage protections
- High reliability, long longevity
- UL 1741/CSA-C22.2 No.107.1, EN62109 approval(pending)
- Meet 5000m altitude requirements



## Product Program

Model Number	Power	Output Voltage/Current (Vo/Io)	Effi(%) (typ)	Max.Capacitive Load (μF)
PV200-29B24	200W	24V/8.4A	86	2200
PV200-29B48		48V/4.2A	87	1000

## Package Dimension LxWxH: 168.00x110.00x45.00(mm)

**Pin-Out**

Pin	Function	Pin	Function
red line	Vin+	6	Vo+
black line	Vin-	7	Vo+
1	Vo-	8	Vo+
2	Vo-	9	Vo+
3	Vo-	10	Trim
4	Vo-	11	Trim
5	NC		

Unit: mm[inch]  
Wire diameter:24-12AWG  
Tightening torque: Max 0.4 N-m  
Pin diameter tolerance: ±1.00[±0.039]

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# 1W Fixed Input Voltage, Isolated & Unregulated Output Series (Automotive)

RoHS

## Features

- Specialized for automotive application, the whole machine meet AEC-Q100 standard
- Operating temperature: -40°C to +105°C
- Isolation: 3500VDC
- Compact SMD package
- Manufacturing process meets IATF16949 standard
- Output short-circuit protection (self-recovery)
- International standard pin-out





## Product Program

Model Number	Power	Input Voltage Range (Nominal)	Output Voltage (VDC)	Output Current (mA)	Effi.(%)(typ)
CF0505XT-1WR3	1W	4.5-5.5 (5VDC)	5	200	82

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

## Package Dimension LxWxH: 12.70x11.20x7.25(mm)

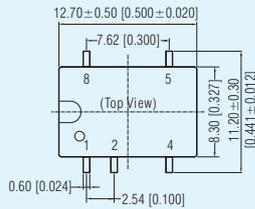

## Pin-Out

Pin	Function
1	GND
2	Vin
4	0V
5	+Vo
8	NC

NC: No connection.

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

DC/DC Converter

# HK Series Specialized for Intelligent Instrument

RoHS

## Features

- Suitable for two-wire loop power application
- Operating temperature: -40°C to +85°C
- High output current up to 5mA
- Ultra-miniature SIP package (HK\_S Series)
- Excellent high and low temperature characteristics
- Isolation 1500VDC





## Product Program

Model Number	Input Voltage (VDC)	Input Current (mA)	Output Voltage (VDC)	Output Current (mA)	Isolation voltage (package)	Max.Capacitive Load ( $\mu$ F)
HK0503S	5	3.5-20	3.3	2.5	1500VDC (SIP)	10
HK5S03B		4-20	3.3	3.2	1000VDC (SIP)	10
HK8S03B	7.5	4-20	3.3	3.5	1000VDC (SIP)	10
HK8SX3B		4-20	3	5	1000VDC (SIP)	10
HK0803S	7-8	3.5-20	3.3	3.5	1500VDC (SIP)	10
HK0805S	7-8	3.5-20	5	2	1500VDC (SIP)	10

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

## Package Dimension LxWxH: 19.65x6.00x10.16(mm) HKxxxxB




## Pin-Out



Pin	Function
1	Vin
2	GND
4	0V
6	+Vo

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

## Application:

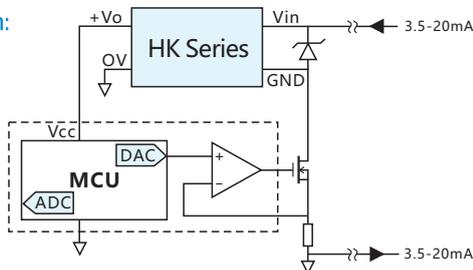

## Package Dimension LxWxH: 19.65x6.00x10.16(mm) HKxxxxS



## Pin-Out

Pin	Function
1	GND
2	Vin
3	0V
4	+Vo


Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

# 1 W Fixed Input Voltage, Isolated & Unregulated Output Series Specialized for BMS

RoHS

## Features


- Suitable for BMS application
- Isolation: 1500VDC
- High power density
- No external component required
- International standard pin-out
- Meet requirements of EMI CISPR25 CLASS 3 Standard
- Efficiency up to 79%

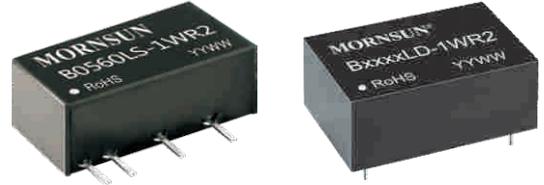

## Product Program


Model Number	Input Voltage Range (Nominal)	Output Voltage (VDC)	Output Current (mA)	Effi.(%) (typ)	Package
B0560LS-1WR2	4.5-5.5 (5VDC)	60	17	77	SIP
B0560LD-1WR2		50	20	77	DIP
B0550LD-1WR2		50	20	79	DIP

## Application:

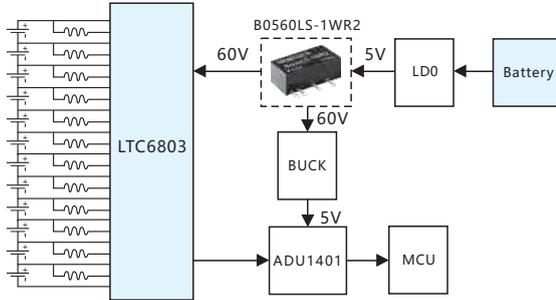

## Package Dimension


**B0560LS-1WR2** LxWxH: 19.65x7.05x10.16(mm)

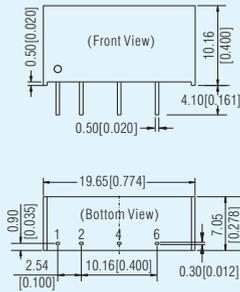

Pin	Function
1	Vin
2	GND
4	0V
6	+Vo

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

**B\_LD-1WR2** LxWxH: 20.32x10.16x8.20(mm)

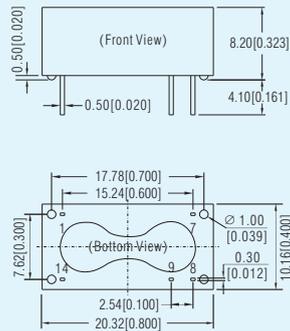

Pin	Function
1	GND
7	NC
8	0V
9	+Vo
14	Vin


Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

# 1-2W Fixed Input Voltage, Isolated & Unregulated Output G/H\_S Series Specialized for Medical

cRU<sup>®</sup>us CE CB RoHS

## Features

- IEC60950, EN60601-1, ANSI/AAMI ES60601-1 approval (3rd edition, 1xMOPP/2xMOOP)
- Operating temperature: -40°C to +85°C
- Isolation: 4200VAC or 6000VDC
- Efficiency up to 84%
- International standard pin-out
- The patient leakage current: Max 2μA

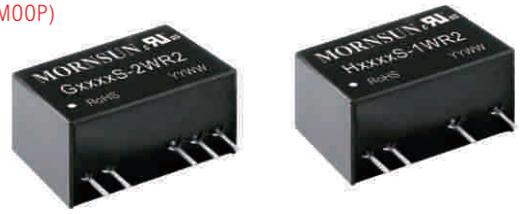


Product Program								
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification			
H0305S-1WR2	1W	4.5-5.5 (5VDC)	5/200	4200VAC (SIP)	RoHS			
G0505S-1WR2			±5V/±100mA		cRU <sup>®</sup> us			
G0509S-1WR2			±9V/±56mA		CE			
G0512S-1WR2			±12V/±42mA					
G0515S-1WR2			±15V/±34mA					
H0503S-1WR2			3.3V/303mA					
H0505S-1WR2			5V/200mA		cRU <sup>®</sup> us			
H0512S-1WR2			12V/84mA		CE			
H0515S-1WR2			15V/67mA		CB			
G1205S-1WR2			1W		10.8-13.2 (12VDC)	±5V/±100mA	4200VAC (SIP)	cRU <sup>®</sup> us
G1209S-1WR2	±9V/±56mA	CE						
G1212S-1WR2	±12V/±42mA							
G1215S-1WR2	±15V/±34mA							
H1205S-1WR2	5V/200mA							
H1212S-1WR2	12V/84mA	cRU <sup>®</sup> us						
H1215S-1WR2	15V/67mA	CB						
G1515S-1WR2	±15/±34	CE						
G2405S-1WR2	1W	21.6-26.4 (24VDC)		±5V/±100mA		4200VAC (SIP)		cRU <sup>®</sup> us
G2409S-1WR2				±9V/±56mA				CE
G2412S-1WR2			±12V/±42mA					
G2415S-1WR2			±15V/±34mA					
H2405S-1WR2			5V/200mA					
H2412S-1WR2			12V/84mA	cRU <sup>®</sup> us				
H2415S-1WR2			15V/67mA	CB				
G0505S-2WR2			2W	4.5-5.5 (5VDC)	±5V/±200mA		4200VAC (SIP)	cRU <sup>®</sup> us
G0509S-2WR2					±9V/±111mA			CE
G0512S-2WR2					±12V/±83mA			
G0515S-2WR2	±15V/±67mA							
H0505S-2WR2	5V/400mA							
H0512S-2WR2	12V/167mA							
H0515S-2WR2	15V/133mA							
G1205S-2WR2	±5V/±200mA							
G1209S-2WR2	±9V/±111mA							
G1212S-2WR2	±12V/±83mA	cRU <sup>®</sup> us						
G1215S-2WR2	±15V/±67mA	CE						
H1205S-2WR2	5V/400mA							
H1212S-2WR2	12V/167mA							
H1215S-2WR2	15V/133mA							
G1505S-2WR2	2W	13.5-16.5 (15VDC)	±5/±200	4200VAC (SIP)	RoHS			
G1515S-2WR2			±15/±67					
H1505S-2WR2			5/400		cRU <sup>®</sup> us			
G2405S-2WR2	2W	21.6-26.4 (24VDC)	±5V/±200mA	4200VAC (SIP)				
G2409S-2WR2			±9V/±111mA					
G2412S-2WR2			±12V/±83mA					
G2415S-2WR2			±15V/±67mA		cRU <sup>®</sup> us			
H2405S-2WR2			5V/400mA		CE			
H2412S-2WR2			12V/167mA					
H2415S-2WR2			15V/133mA					


Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

## Package Dimension

H\_S-1WR2, H\_S-2WR2 Series LxWxH: 19.50x9.80x12.50(mm)

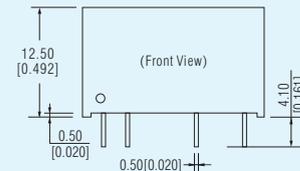


Pin-Out	
Pin	Single
1	Vin
2	GND
5	OV
7	+Vo

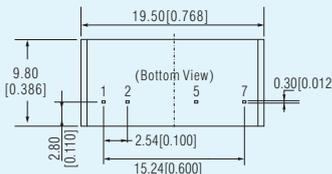


Unit: mm[inch]  
Pin section tolerance: ±0.10[±0.004]  
General tolerance: ±0.25[±0.010]

G\_S-1WR2, G\_S-2WR2 Series LxWxH: 19.50x9.80x12.50(mm)

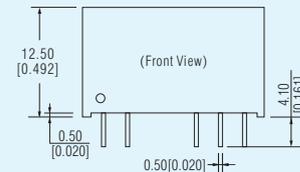

Pin-Out	
Pin	Dual
1	Vin
2	GND
5	-Vo
6	OV
7	+Vo

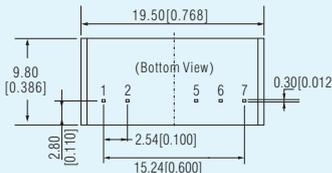

Unit: mm[inch]  
Pin section tolerance: ±0.10[±0.004]  
General tolerance: ±0.25[±0.010]

# 1-2W Fixed Input Voltage, 1500VDC Isolated & Unregulated Output Series

RoHS

## Features

- Pin-out compatible with DCP01 series
- Operating temperature: -40°C to +105°C
- Compact size, ultra-thin package
- International standard pin-out
- Continuous short-circuit protection




## Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation	Package
B0505RN-1WR2	1W	4.5-5.5 (5VDC)	5V/200mA	1500VDC	DIP
B0505RT-1WR2					SMD

Note: 1. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

## Package Dimension

**B\_RN-1WR2** LxWxH: 19.50x9.50x4.68(mm)

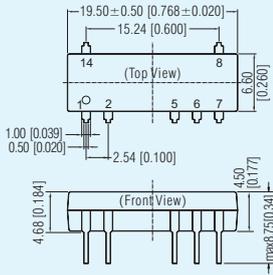


### Pin-Out

Pin	Function
1	Vin
2	GND
5	0V
6	+Vo
Others	NC

NC: No connection.

Unit: mm[inch]  
 Pin section tolerance: ±0.10[±0.004]  
 General tolerance: ±0.25[±0.010]

**B\_RT-1WR2** LxWxH: 19.50x10.53x5.00(mm)

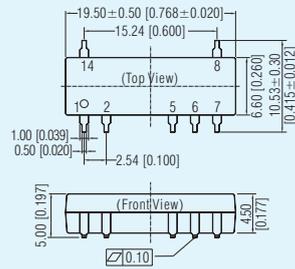

### Pin-Out

Pin	Function
1	Vin
2	GND
5	0V
6	+Vo
Others	NC

NC: No connection.

Unit: mm[inch]  
 Pin section tolerance: ±0.10[±0.004]  
 General tolerance: ±0.25[±0.010]

# 0.25-1W Fixed Input Voltage, 1500VDC Isolated & Unregulated Output Series

## Features

- Isolation: 1500VDC
- Operating temperature: -40°C to +105°C
- Efficiency up to 83%
- No-load input current as low as 5mA
- Miniature SIP package
- Anti-static protection:  $\pm 8KV$
- Continuous short-circuit protection
- International standard pin-out
- IEC/EN/UL60950 approval, UL/EN62368 approval (pending)




## Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
B0303S-W2R2	0.25W	2.97-3.63 (3.3VDC)	3.3V/76mA	1500VDC (SIP)	cULus CE CB RoHS				
B0305S-W2R2			5V/50mA						
B0503S-W2R2		4.5-5.5 (5VDC)	3.3V/76mA						
B0505S-W2R2			5V/50mA						
B0512S-W2R2			12V/21mA						
B1205S-W2R2			5V/50mA						
B1505S-W2R2			13.5-16.5 (15VDC)			5V/50mA			
B2405S-W2R2			21.6-26.4 (24VDC)			5V/50mA			
B0303LS-1WR2*	1W	2.97-3.63 (3.3VDC)	3.3V/303mA	1500VDC (SIP)	RoHS				
B0305LS-1WR2*			5V/200mA	1500VDC (SIP)	RoHS				
B0303S-1WR2*			3.3V/303mA	1500VDC (SIP)	RoHS				
B0305S-1WR2*			5V/200mA	1500VDC (SIP)	RoHS				
A0505S-1WR3	1W	4.5-5.5 (5VDC)	$\pm 5V/\pm 100mA$	1500VDC (SIP)	cULus CE (pending) RoHS				
A0509S-1WR3			$\pm 9V/\pm 56mA$						
A0512S-1WR3			$\pm 12V/\pm 42mA$						
A0515S-1WR3			$\pm 15V/\pm 34mA$						
B0505LS-1WR3			5V/200mA						
B0509LS-1WR3			9V/111mA						
B0512LS-1WR3			12V/84mA						
B0515LS-1WR3			15V/67mA						
B0503S-1WR3			3.3V/303mA						
B0505S-1WR3			5V/200mA						
B0509S-1WR3			9V/111mA						
B0512S-1WR3			12V/84mA						
B0515S-1WR3			15V/67mA						
B0524S-1WR3			24V/42mA						
A1205S-1WR2			1W			10.8-13.2 (12VDC)	$\pm 5V/\pm 100mA$	1500VDC (SIP)	cULus CE RoHS
A1212S-1WR2							$\pm 12V/\pm 42mA$		
A1215S-1WR2	$\pm 15V/\pm 34mA$								
B1205LS-1WR2	5V/200mA								
B1212LS-1WR2	12V/84mA								
B1215LS-1WR2	15V/67mA								
B1224LS-1WR2	24V/42mA								
B1205S-1WR2	5V/200mA								
B1212S-1WR2	12V/84mA								
B1215S-1WR2	15V/67mA								
B1224S-1WR2	24V/42mA								
A1505S-1WR2	1W	13.5-16.5 (15VDC)		$\pm 5V/\pm 100mA$	1500VDC (SIP)		RoHS cULus CE RoHS RoHS cULus CE RoHS		
A1512S-1WR2			$\pm 12V/\pm 42mA$						
A1515S-1WR2			$\pm 15V/\pm 34mA$						
B1505LS-1WR2			5V/200mA						
B1512LS-1WR2			12V/84mA						
B1515LS-1WR2			15V/67mA						
B1505S-1WR2			5V/200mA						
B1512S-1WR2			12V/84mA						
B1515S-1WR2			15V/67mA						
A2405S-1WR2*			1W	21.6-26.4 (24VDC)		$\pm 5V/\pm 100mA$		1500VDC (SIP)	cULus CE RoHS
A2412S-1WR2*						$\pm 12V/\pm 42mA$			
A2415S-1WR2*						$\pm 15V/\pm 34mA$			
B2405LS-1WR2*	5V/200mA								
B2412LS-1WR2*	12V/84mA								
B2415LS-1WR2*	15V/67mA								
B2424LS-1WR2*	24V/42mA								
B2405S-1WR2*	5V/200mA								
B2412S-1WR2*	12V/84mA								
B2415S-1WR2*	15V/67mA								
B2424S-1WR2*	24V/42mA								

## Package Dimension

### B\_S-1WR2, B\_S-W2R2, B\_S-1WR3 Series (SIP-4)

LxWxH: 11.60x6.00x10.16(mm)

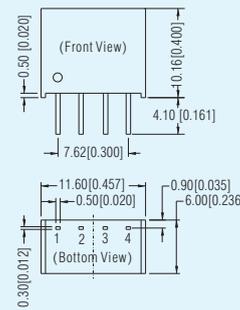


### Pin-Out

Pin	Function
1	GND
2	Vin
3	0V
4	+Vo

Unit: mm[inch]  
 Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
 General tolerance:  $\pm 0.25[\pm 0.010]$

### A\_S-1WR2, B\_LS-1WR2 Series (SIP-7)

LxWxH: 19.50x6.00x9.30(mm)

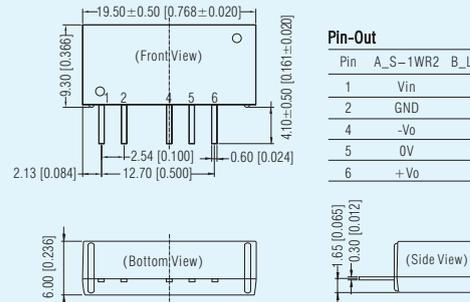


### Pin-Out

Pin	A_S-1WR2	B_LS-1WR2
1	Vin	Vin
2	GND	GND
4	-Vo	0V
5	0V	No Pin
6	+Vo	+Vo

Unit: mm[inch]  
 Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
 General tolerance:  $\pm 0.25[\pm 0.010]$

### A\_S-1WR3, B\_LS-1WR3 Series (SIP-7)

LxWxH: 19.65x6.00x10.16(mm)

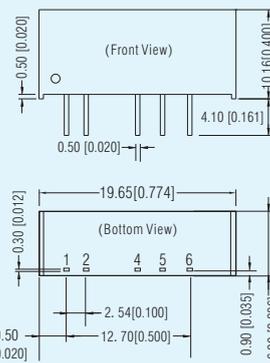

### Pin-Out

Pin	Single	Dual
1	Vin	Vin
2	GND	GND
4	0V	-Vo
5	No Pin	0V
6	+Vo	+Vo


Unit: mm[inch]  
 Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
 General tolerance:  $\pm 0.25[\pm 0.010]$

Note: 1. Short circuit protection time of products marked with \* is 1s;  
 2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

# 1W Fixed Input Voltage, Isolated & Unregulated Output Series

## Features

- Isolation: 3000VDC
- Operating temperature: -40°C to +105°C
- Efficiency up to 85%
- No-load input current as low as 5mA
- Miniature SIP package, automation packaged
- Anti-static protection:  $\pm 8KV$
- Continuous short-circuit protection
- International standard pin-out
- UL/EN60950 approval, UL/EN62368 approval (pending)

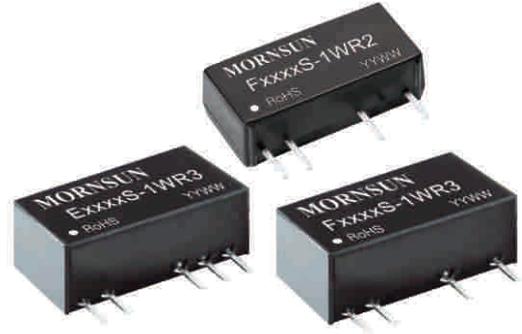


Product Program					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
F0303S-1WR2*	1W	2.97-3.63 (3.3VDC)	3.3V/303mA	3000VDC (SIP)	RoHS
F0305S-1WR2*			5V/200mA		
E0505S-1WR3	1W	4.5-5.5 (5VDC)	$\pm 5V/\pm 100mA$	3000VDC (SIP)	RoHS
E0509S-1WR3			$\pm 9V/\pm 56mA$		
E0512S-1WR3			$\pm 12V/\pm 42mA$		
E0515S-1WR3			$\pm 15V/\pm 33mA$		
F0503S-1WR3			3.3V/303mA		
F0505S-1WR3			5V/200mA		
F0509S-1WR3			9V/111mA		
F0512S-1WR3			12V/83mA		
F0515S-1WR3			15V/67mA		
F0524S-1WR3			24V/42mA		
E1205S-1WR2	1W	10.8-13.2 (12VDC)	$\pm 5V/\pm 100mA$	3000VDC (SIP)	RoHS
E1212S-1WR2			$\pm 12V/\pm 42mA$		
E1215S-1WR2			$\pm 15V/\pm 33mA$		
F1205S-1WR2			5V/200mA		
F1212S-1WR2			12V/83mA		
F1215S-1WR2			15V/67mA		
F1224S-1WR2			24V/42mA		
E1505S-1WR2	1W	13.5-16.5 (15VDC)	$\pm 5V/\pm 100mA$	3000VDC (SIP)	RoHS
E1515S-1WR2			$\pm 15V/\pm 33mA$		
F1505S-1WR2			5V/200mA		
F1512S-1WR2			12V/83mA		
F1515S-1WR2			15V/67mA		
E2405S-1WR2*	1W	21.6-26.4 (24VDC)	$\pm 5V/\pm 100mA$	3000VDC (SIP)	RoHS
E2412S-1WR2*			$\pm 12V/\pm 42mA$		
E2415S-1WR2*			$\pm 15V/\pm 33mA$		
F2405S-1WR2*			5V/200mA		
F2412S-1WR2*			12V/83mA		
F2415S-1WR2*			15V/67mA		
F2424S-1WR2*			24V/42mA		

Note: 1. Short circuit protection time of products marked with \* is 1s;


2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

## Package Dimension

E\_S-1WR2、F\_S-1WR2 Series (SIP) LxWxH: 19.50x6.00x9.30(mm)

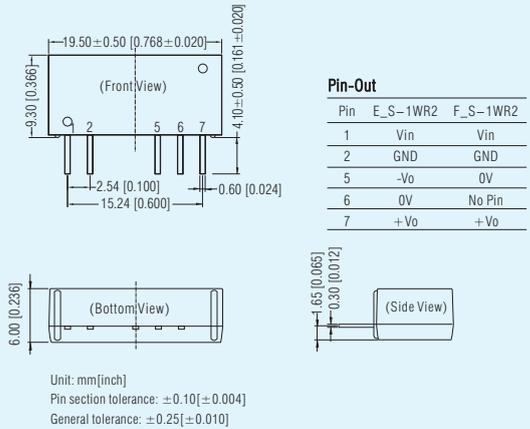

E\_S-1WR3、F\_S-1WR3 Series (SIP) LxWxH: 19.65x6.00x10.16(mm)

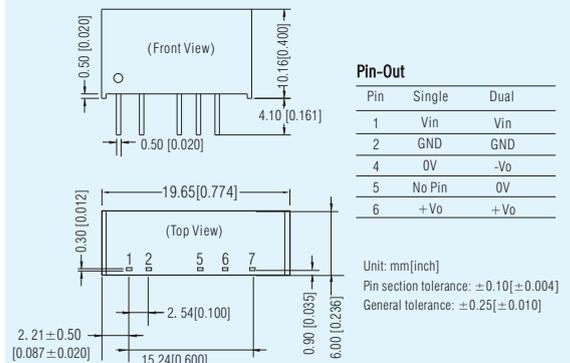

# 0.25-1W Fixed Input Voltage, Isolated & Unregulated Output Series

## Features

- Operating temperature: -40°C to +105°C
- Efficiency up to 85%
- High power density
- Miniature Compact SMD package
- Anti-static protection: ±8KV
- Continuous short-circuit protection



## Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification		
B0303XT-W2R2	0.25W	2.97-3.63 (3.3VDC)	3.3V/76mA	1500VDC (SMD)	RoHS		
B0305XT-W2R2			5V/50mA				
B0503XT-W2R2		4.5-5.5 (5VDC)	3.3V/76mA		3000VDC (SMD)	CE	
B0505XT-W2R2			5V/50mA				
B0515XT-W2R2		10.8-13.2 (12VDC)	15V/17mA			RoHS	
B1205XT-W2R2			5V/50mA				
B1212XT-W2R2		12V/21mA					
B2405XT-W2R2		21.6-26.4(24VDC)	5V/50mA				
F0505XT-W2R3		4.5-5.5(5VDC)	5V/40mA				
F1205XT-W2R2		10.8-13.2(12VDC)	5V/50mA				
B0303XT-1WR2*	1W	2.97-3.63 (3.3VDC)	3.3V/303mA	1500VDC (SMD)			CE RoHS
B0305XT-1WR2*			5V/200mA				
B0506XT-1WR2	1W	4.5-5.5(5VDC)	6V/167mA	1500VDC (SMD)	RoHS		
A0505XT-1WR3			±5V/±100mA				
A0509XT-1WR3		±9V/±56mA	1500VDC (SMD)		RoHS		
A0512XT-1WR3		±12V/±42mA					
A0515XT-1WR3		±15V/±34mA					
B0503XT-1WR3		3.3V/303mA					
B0505XT-1WR3		5V/200mA					
B0509XT-1WR3		9V/111mA					
B0512XT-1WR3		12V/84mA					
B0515XT-1WR3		15V/67mA					
B0524XT-1WR3	24V/42mA						
A1205XT-1WR2	1W	10.8-13.2 (12VDC)		±5V/±100mA	1500VDC (SMD)	RoHS	
A1212XT-1WR2			±12V/±42mA				
A1215XT-1WR2		±15V/±33mA					
B1205XT-1WR2		5V/200mA					
B1212XT-1WR2		12V/84mA					
B1215XT-1WR2		15V/67mA					
B1224XT-1WR2		24V/42mA					
A1515XT-1WR2		13.5-16.5 (15VDC)	±15V/±33mA	1500VDC (SMD)		RoHS	
B1505XT-1WR2			5V/200mA				
B1515XT-1WR2		15V/67mA					
A2405XT-1WR2*	21.6-26.4 (24VDC)	±5V/±100mA	1500VDC (SMD)		RoHS		
A2412XT-1WR2*		±12V/±42mA					
A2415XT-1WR2*	±15V/±33mA						
B2405XT-1WR2*	5V/200mA						
B2412XT-1WR2*	12V/84mA						
B2415XT-1WR2*	15V/67mA						
B2424XT-1WR2*	24V/42mA						
F0303XT-1WR2*	1W	2.97-3.63 (3.3VDC)		3.3V/303mA	3000VDC (SMD)	CE RoHS	
F0305XT-1WR2*				5V/200mA			
E0505XT-1WR3	1W	4.5-5.5 (5VDC)		±5V/±100mA	3000VDC (SMD)	RoHS	
E0509XT-1WR3			±9V/±56mA				
E0512XT-1WR3		±12V/±42mA					
E0515XT-1WR3		±15V/±34mA					
F0503XT-1WR3		3.3V/303mA					
F0505XT-1WR3		5V/200mA					
F0509XT-1WR3		9V/111mA					
F0512XT-1WR3		12V/84mA					
F0515XT-1WR3		15V/67mA					
F0524XT-1WR3		24V/42mA					
E1205XT-1WR2	1W	10.8-13.2 (12VDC)	±5V/±100mA	3000VDC (SMD)	RoHS		
E1212XT-1WR2			±12V/±42mA				
E1215XT-1WR2		±15V/±33mA					
E1224XT-1WR2		±24V/±21mA					
F1205XT-1WR2		5V/200mA					
F1212XT-1WR2		12V/84mA					
F1215XT-1WR2		15V/67mA					
F1224XT-1WR2		24V/42mA					
E1515XT-1WR2		13.5-16.5 (15VDC)	±15V/±33mA		3000VDC (SMD)	RoHS	
F1515XT-1WR2			15V/67mA				


Note: 1. Short circuit protection time of products marked with \* is 1s;  
 2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

## Product Program


Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
E2405XT-1WR2*	1W	21.6-26.4 (24VDC)	±5V/±100mA	3000VDC (SMD)	RoHS
E2412XT-1WR2*			±12V/±42mA		
E2415XT-1WR2*			±15V/±33mA		
E2424XT-1WR2*			±24V/±21mA		
F2405XT-1WR2*			5V/200mA		
F2415XT-1WR2*			15V/67mA		
F2424XT-1WR2*			24V/42mA		

## Package Dimension


**A\_XT-1WR2, E\_XT-1WR2 Series** LxWxH: 15.24x11.20x7.25(mm)

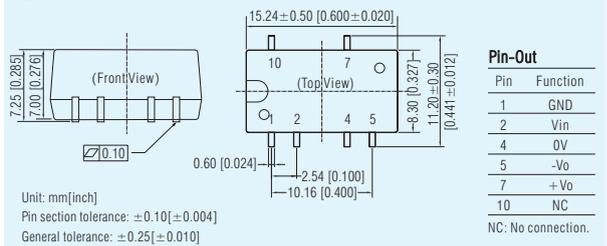


**A\_XT-1WR3, E\_XT-1WR3 Series** LxWxH: 15.24x11.40x7.25(mm)

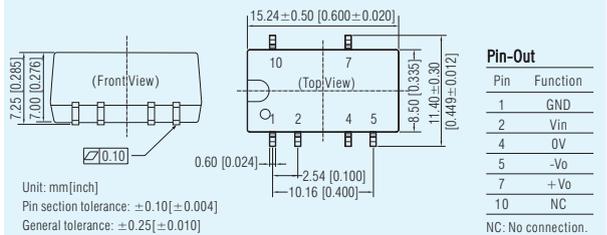

**B/F\_XT-W2R2, B/F\_XT-1WR2 Series** LxWxH: 13.20x11.40x7.25(mm)

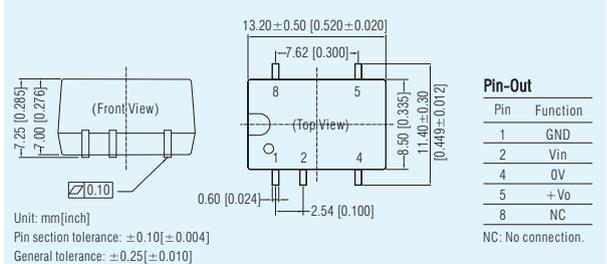


**F\_XT-W2R3, B/F\_XT-1WR3 Series** LxWxH: 13.20x11.40x7.25(mm)

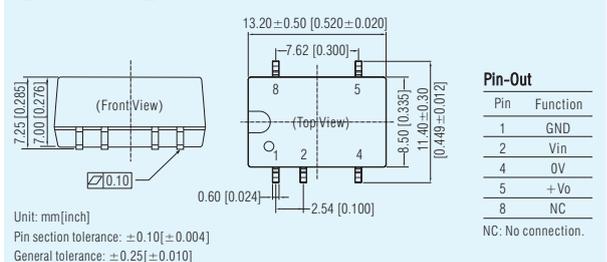

# 1W Fixed Input Voltage, Isolated & Unregulated Output Series

## Features

- Operating temperature: -40°C to +105°C
- Isolation: 3000VDC
- Efficiency up to 83%
- No-load input current as low as 5mA
- Miniature DIP package
- Anti-static protection: ±8KV
- Continuous short-circuit protection
- International standard pin-out
- IEC/EN/UL60950 approval, UL/EN62368 approval (pending)

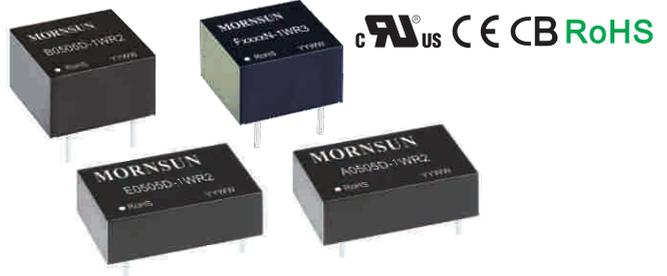


## Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
B0303D-1WR2*	1W	2.97-3.63 (3.3VDC)	3.3V/303mA	1500VDC (DIP)	RoHS
B0305D-1WR2*			5V/200mA		
A0505D-1WR2	1W	4.5-5.5 (5VDC)	±5V/±100mA	1500VDC (DIP)	RoHS
A0512D-1WR2			±12V/±42mA		
A0515D-1WR2			±15V/±34mA		
B0503D-1WR2			3.3V/303mA		
B0505D-1WR2			5V/200mA		
B0512D-1WR2			12V/84mA		
B0515D-1WR2			15V/67mA		
B0524D-1WR2*		24V/42mA	1500VDC (DIP)	RoHS	
A1205D-1WR2	1W	10.8-13.2 (12VDC)			±5V/±100mA
A1212D-1WR2			±12V/±42mA		
B1205D-1WR2			5V/200mA		
B1212D-1WR2			12V/84mA		
B1215D-1WR2			15V/67mA		
B1505D-1WR2	1W	13.5-16.5 (15VDC)	5V/200mA	1500VDC (DIP)	RoHS
B1515D-1WR2			15V/67mA		
A2412D-1WR2*	1W	21.6-26.4 (24VDC)	±12V/±42mA	1500VDC (DIP)	RoHS
A2415D-1WR2*			±15V/±34mA		
B2405D-1WR2*			5V/200mA		
B2412D-1WR2*			12V/84mA		
B2415D-1WR2*			15V/67mA		
B2424D-1WR2*			24V/42mA		
F0303D-1WR2*	1W	2.97-3.63(3.3VDC)	3.3V/303mA	3000VDC (DIP)	CE RoHS
E0505D-1WR2			±5V/±100mA		
E0512D-1WR2			±12V/±42mA		
E0515D-1WR2			±15V/±34mA		
F0503D-1WR2			3.3V/303mA		
F0505D-1WR2			5V/200mA		
F0512D-1WR2			12V/83mA		
F0515D-1WR2	15V/67mA				
E1205D-1WR2	1W	10.8-13.2 (12VDC)	±5V/±100mA	3000VDC (DIP)	CE RoHS
F1205D-1WR2			5V/200mA		
F1212D-1WR2			12V/83mA		
F1215D-1WR2			15V/67mA		
F1515D-1WR2			15V/67mA		
E2412D-1WR2*	1W	21.6-26.4 (24VDC)	±12V/±42mA	3000VDC (DIP)	CE RoHS
E2415D-1WR2*			±15V/±34mA		
F2405D-1WR2*			5V/200mA		
F0505N-1WR3	1W	4.5-5.5 (5VDC)	5V/200mA	3000VDC (DIP)	CE (pending) RoHS
F0509N-1WR3			9V/111mA		
F0512N-1WR3			12V/84mA		
F0515N-1WR3			15V/67mA		

Note: 1. Short circuit protection time of products marked with \* is 1s;  
 2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.


## F05\_N-1WR3 Series (DIP) LxWxH: 12.70x10.16x7.70(mm)

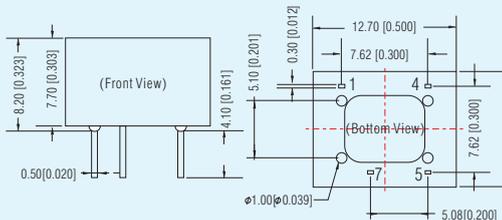

Pin	Function
1	GND
4	Vin
5	+Vo
7	0V

## Package Dimension


### B\_D-1WR2 Series (DIP) LxWxH: 12.70x10.16x8.20(mm)

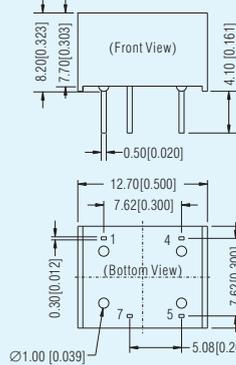

### Pin-Out

Pin	Function
1	GND
4	Vin
5	+Vo
7	0V

### A\_D-1WR2 Series (DIP) LxWxH: 20.00x10.00x7.00(mm)

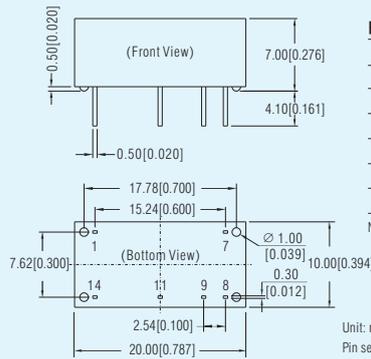


### Pin-Out

Pin	Function
1	GND
7	NC
8	0V
9	+Vo
11	-Vo
14	Vin

NC: No connection.

### E/F\_D-1WR2 Series (DIP) LxWxH: 20.00x10.00x7.00(mm)

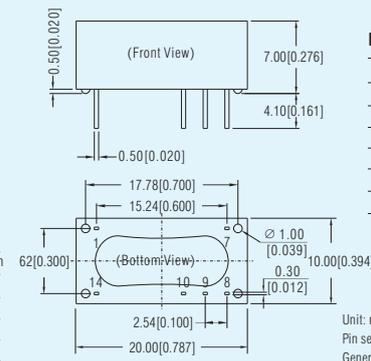

### Pin-Out

Pin	Single	Dual
1	GND	GND
7	NC	NC
8	+Vo	+Vo
9	No Pin	0V
10	0V	-Vo
14	Vin	Vin

NC: No connection.

# 2-3W Fixed Input Voltage, Isolated & Unregulated Output Series


## Features

- Operating temperature: -40°C to +105°C
- Efficiency up to 88%
- High power density
- Miniature SIP package
- Anti-static protection:  $\pm 8\text{KV}$
- Continuous short-circuit protection







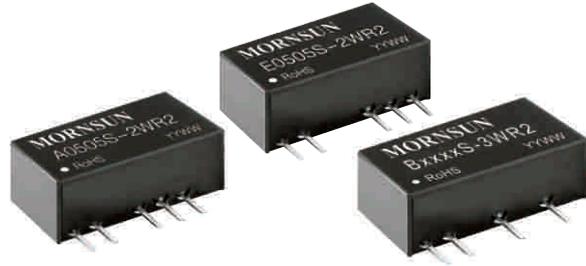


Product Program							
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification		
A0505S-2WR2	2W	4.5-5.5 (5VDC)	$\pm 5\text{V}/\pm 200\text{mA}$	1500VDC (SIP)	   		
A0512S-2WR2			$\pm 12\text{V}/\pm 83\text{mA}$				
A0515S-2WR2			$\pm 15\text{V}/\pm 67\text{mA}$				
B0503S-2WR2			3.3V/400mA				
B0505S-2WR2			5V/400mA				
B0512S-2WR2			12V/167mA				
B0515S-2WR2			15V/133mA				
B0524S-2WR2*			24V/83mA				
A1205S-2WR2	2W	10.8-13.2 (12VDC)	$\pm 5\text{V}/\pm 200\text{mA}$	1500VDC (SIP)	   		
A1212S-2WR2			$\pm 12\text{V}/\pm 83\text{mA}$				
A1215S-2WR2			$\pm 15\text{V}/\pm 67\text{mA}$				
B1205S-2WR2			5V/400mA				
B1212S-2WR2			12V/167mA				
B1215S-2WR2			15V/133mA				
B1224S-2WR2			24V/83mA				
A1505S-2WR2			2W			13.5-16.5 (15VDC)	$\pm 5\text{V}/\pm 200\text{mA}$
A1515S-2WR2	$\pm 15\text{V}/\pm 67\text{mA}$						
B1505S-2WR2	5V/400mA						
B1515S-2WR2	15V/133mA						
A2405S-2WR2*	$\pm 5\text{V}/\pm 200\text{mA}$	1500VDC (SIP)		   			
A2412S-2WR2*	$\pm 12\text{V}/\pm 83\text{mA}$						
A2415S-2WR2*	$\pm 15\text{V}/\pm 67\text{mA}$						
B2405S-2WR2*	5V/400mA						
B2412S-2WR2*	12V/167mA						
B2415S-2WR2*	15V/133mA						
B2424S-2WR2*	24V/83mA						
E0505S-2WR2	2W		4.5-5.5 (5VDC)		$\pm 5\text{V}/\pm 200\text{mA}$	3000VDC (SIP)	   
E0512S-2WR2		$\pm 12\text{V}/\pm 83\text{mA}$					
E0515S-2WR2		$\pm 15\text{V}/\pm 67\text{mA}$					
F0503S-2WR2		3.3V/400mA					
F0505S-2WR2		5V/400mA					
F0512S-2WR2		12V/167mA					
F0515S-2WR2		15V/133mA					
F0524S-2WR2*		24V/83mA					
E1205S-2WR2	2W	10.8-13.2 (12VDC)	$\pm 5\text{V}/\pm 200\text{mA}$	3000VDC (SIP)	   		
E1212S-2WR2			$\pm 12\text{V}/\pm 83\text{mA}$				
E1215S-2WR2			$\pm 15\text{V}/\pm 67\text{mA}$				
F1205S-2WR2			5V/400mA				
F1212S-2WR2			12V/167mA				
F1215S-2WR2			15V/133mA				
F1224S-2WR2			24V/83mA				
E1515S-2WR2			2W			13.5-16.5 (15VDC)	$\pm 5\text{V}/\pm 200\text{mA}$
F1505S-2WR2	$\pm 15\text{V}/\pm 67\text{mA}$						
F1512S-2WR2	12V/167mA						
E2405S-2WR2*	$\pm 5\text{V}/\pm 200\text{mA}$	3000VDC (SIP)		   			
E2412S-2WR2*	$\pm 12\text{V}/\pm 83\text{mA}$						
E2415S-2WR2*	$\pm 15\text{V}/\pm 67\text{mA}$						
F2405S-2WR2*	5V/400mA						
F2412S-2WR2*	12V/167mA						
F2415S-2WR2*	15V/133mA						
F2424S-2WR2*	24V/83mA						
B0505S-3WR2*	3W		4.5-5.5(5VDC)		5V/600mA	1500VDC (SIP)	
B1212S-3WR2*		10.8-13.2(12VDC)	12V/250mA				
F0505S-3WR2		4.5-5.5(5VDC)	5V/600mA				
F1205S-3WR2		10.8-13.2 (12VDC)	5V/600mA				
F1212S-3WR2	3W	10.8-13.2 (12VDC)	5V/600mA	3000VDC (SIP)			
F1215S-3WR2			12V/250mA				

Note: 1. Short circuit protection time of products marked with \* is 1s;  
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

## Package Dimension

**A\_S-2WR2, B\_S-2WR2 Series (SIP)** LxWxH: 19.65x7.05x10.16(mm)

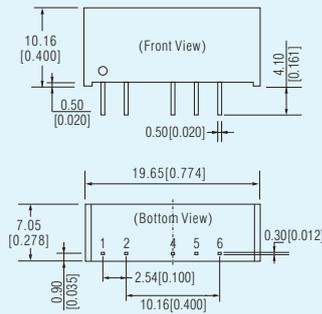


### Pin-Out

Pin	A_S-2WR2	B_S-2WR2
1	Vin	Vin
2	GND	GND
4	-Vo	0V
5	0V	No Pin
6	+Vo	+Vo

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

**E\_S-2WR2, F\_S-2WR2, F\_S-3WR2 Series(SIP)**

LxWxH: 19.65x7.05x10.16 (mm)

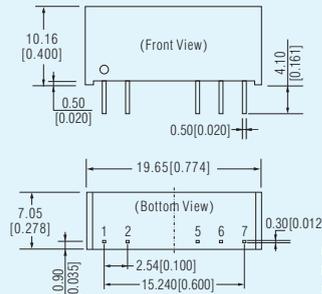


### Pin-Out

Pin	E_S-2WR2	F_S-2WR2/3WR2
1	Vin	Vin
2	GND	GND
5	-Vo	0V
6	0V	No Pin
7	+Vo	+Vo

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10\text{mm}[\pm 0.004]$   
General tolerance:  $\pm 0.25\text{mm}[\pm 0.010]$

**B\_S-3WR2 Series (SIP)** LxWxH: 19.65x7.05x10.16(mm)

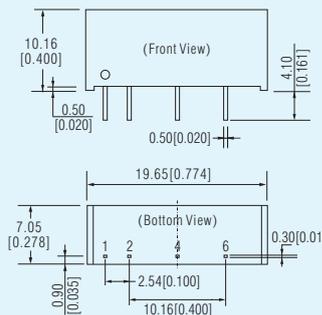

### Pin-Out

Pin	Function
1	Vin
2	GND
4	0V
6	+Vo

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

# 2-3W Fixed Input Voltage, Isolated & Unregulated Output Series

## Features

- Operating temperature: -40°C to +105°C
- Efficiency up to 84%
- High power density
- Miniature SMD package
- Anti-static protection:  $\pm 8KV$




Product Program					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
B0503XT-2WR2	2W	4.5-5.5 (5VDC)	3.3V/400mA	1500VDC (SMD)	CE RoHS
B0505XT-2WR2			5V/400mA		
B0512XT-2WR2			12V/167mA		
B0515XT-2WR2			15V/133mA		
B1205XT-2WR2	2W	10.8-13.2 (12VDC)	5V/400mA	1500VDC (SMD)	CE RoHS
B1212XT-2WR2			12V/167mA		
B1215XT-2WR2			15V/133mA		
B1224XT-2WR2			24V/83mA		
B1505XT-2WR2	2W	13.5-16.5 (15VDC)	5V/400mA	1500VDC (SMD)	RoHS CE RoHS
B1515XT-2WR2			15V/133mA		
B2405XT-2WR2			5V/400mA		
B2412XT-2WR2			12V/167mA		
B2415XT-2WR2	2W	21.6-26.4 (24VDC)	15V/133mA	1500VDC (SMD)	CE RoHS
B2424XT-2WR2			24V/83mA		
F0505XT-2WR2	2W	4.5-5.5 (5VDC)	5V/400mA	3000VDC (SMD)	CE RoHS
F0512XT-2WR2			12V/167mA		
F0515XT-2WR2			15V/133mA		
F1205XT-2WR2	2W	10.8-13.2 (12VDC)	5V/400mA	3000VDC (SMD)	CE RoHS
F1212XT-2WR2			12V/167mA		
F1215XT-2WR2			15V/133mA		
F1224XT-2WR2			24V/83mA		
F1505XT-2WR2	2W	13.5-16.5 (15VDC)	5V/400mA	3000VDC (SMD)	RoHS
F1515XT-2WR2			15V/133mA		
F2405XT-2WR2			5V/400mA		
F2412XT-2WR2			12V/167mA		
F2415XT-2WR2	2W	21.6-26.4 (24VDC)	15V/133mA	3000VDC (SMD)	CE RoHS
F2424XT-2WR2			24V/83mA		

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

## Package Dimension

**B/F\_XT-2WR2 Series** LxWxH: 12.70x11.20x7.25(mm)

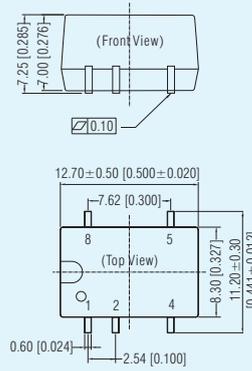


### Pin-Out

Pin	Function
1	GND
2	Vin
4	0V
5	+Vo
8	NC

Unit: mm[inch]  
 Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
 General tolerance:  $\pm 0.25[\pm 0.010]$   
 NC: No connection.

**B0505T-3W** LxWxH: 19.00x10.46x6.60(mm)

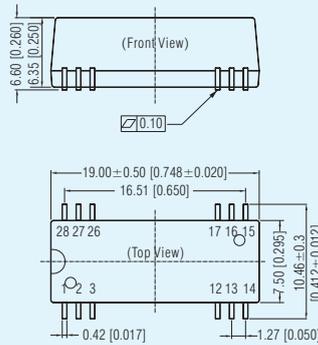

### Pin-Out

Pin	Function
1	Vin
2	GND
3	GND
12	0V
13	Vo
Others	NC

Unit: mm[inch]  
 Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
 General tolerance:  $\pm 0.25[\pm 0.010]$   
 NC: No connection.

# 2W Fixed Input Voltage, Isolated & Unregulated Output Series

## Features

- Operating temperature: -40°C to +85°C
- Efficiency up to 85%
- Miniature DIP package
- Anti-static protection: ±8KV
- Continuous short-circuit protection

RoHS CE CB RoHS




## Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
B0303D-2WR2*	2W	2.97-3.63 (3.3VDC)	3.3V/400mA	1500VDC (DIP)	RoHS				
B0305D-2WR2*			5V/400mA						
A0505D-2WR2	2W	4.5-5.5 (5VDC)	±5V/±200mA	1500VDC (DIP)	RoHS CE CB				
A0512D-2WR2*			±12V/±83mA						
A0515D-2WR2*			±15V/±67mA						
B0503D-2WR2			3.3V/400mA						
B0505D-2WR2			5V/400mA						
B0512D-2WR2			12V/167mA						
B0515D-2WR2			15V/133mA						
B0524D-2WR2*			24V/83mA						
A1205D-2WR2	2W	10.8-13.2 (12VDC)	±5V/±200mA	1500VDC (DIP)	RoHS CE CB				
A1212D-2WR2			±12V/±83mA						
A1215D-2WR2			±15V/±67mA						
B1205D-2WR2			5V/400mA						
B1212D-2WR2			12V/167mA						
B1215D-2WR2			15V/133mA						
B1224D-2WR2			24V/83mA						
A1515D-2WR2			2W			13.5-16.5(15VDC)	±15V/±67mA	1500VDC (DIP)	RoHS CE CB
A2405D-2WR2*	±5V/±200mA								
A2412D-2WR2*	±12V/±83mA								
A2415D-2WR2*	±15V/±67mA								
B2405D-2WR2*	5V/400mA								
B2412D-2WR2*	12V/167mA								
B2415D-2WR2*	15V/133mA								
B2424D-2WR2*	24V/83mA								
E0505D-2WR2	2W	4.5-4.5 (5VDC)	±5V/±200mA	3000VDC (DIP)	RoHS CE CB				
E0512D-2WR2*			±12V/±83mA						
E0515D-2WR2*			±15V/±67mA						
F0505D-2WR2			5V/400mA						
F0512D-2WR2			12V/167mA						
F0515D-2WR2			15V/133mA						
F0524D-2WR2*			24V/83mA						
E1205D-2WR2			2W			10.6-13.2 (12VDC)	±5V/±200mA	3000VDC (DIP)	RoHS CE CB
E1212D-2WR2	±12V/±83mA								
E1215D-2WR2	±15V/±67mA								
F1205D-2WR2	5V/400mA								
F1212D-2WR2	12V/167mA								
F1215D-2WR2	15V/133mA								
F1224D-2WR2	24V/83mA								
E1512D-2WR2	2W	13.5-16.5 (15VDC)		±12V/±83mA	3000VDC (DIP)		RoHS CE CB		
E1515D-2WR2			±15V/±67mA						
F1505D-2WR2			5V/400mA						
F1515D-2WR2			15V/133mA						
E2405D-2WR2*			2W	21.6-26.4 (24VDC)		±5V/±200mA		3000VDC (DIP)	RoHS CE CB
E2412D-2WR2*						±12V/±83mA			
F2405D-2WR2*						5V/400mA			
F2412D-2WR2*						12V/167mA			
F2415D-2WR2*	15V/133mA								
F2424D-2WR2*	24V/83mA								

Note: 1. Short circuit protection time of products marked with \* is 1s;  
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

## Package Dimension

A/B\_D-2WR2 Series (DIP-14) LxWxH: 20.32x10.16x8.20(mm)

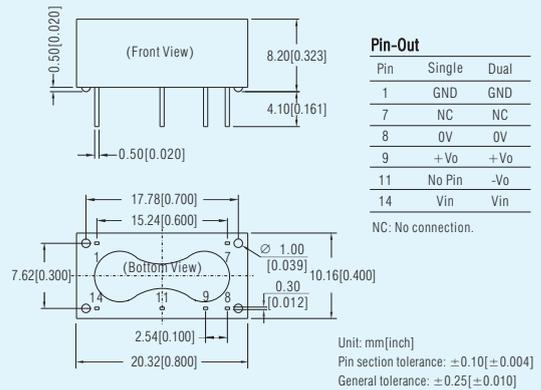


### Pin-Out

Pin	Single	Dual
1	GND	GND
7	NC	NC
8	0V	0V
9	+Vo	+Vo
11	No Pin	-Vo
14	Vin	Vin

NC: No connection.

E/F\_D-2WR2 Series (DIP-14) LxWxH: 20.32x10.16x8.20(mm)

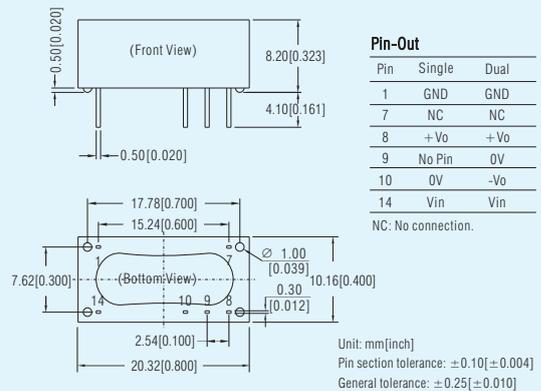

### Pin-Out


Pin	Single	Dual
1	GND	GND
7	NC	NC
8	+Vo	+Vo
9	No Pin	0V
10	0V	-Vo
14	Vin	Vin

NC: No connection.

# 0.75-2W Fixed Input Voltage, Isolated & Regulated Output Series

## Features

- Isolation: 3000VDC
- Operating temperature: -40°C to +85°C
- Efficiency up to 74%
- No-load input current as low as 5mA
- Miniature SIP package
- Continuous short-circuit protection
- International standard pin-out
- EN60950 approval, UL/EN62368 approval (pending)

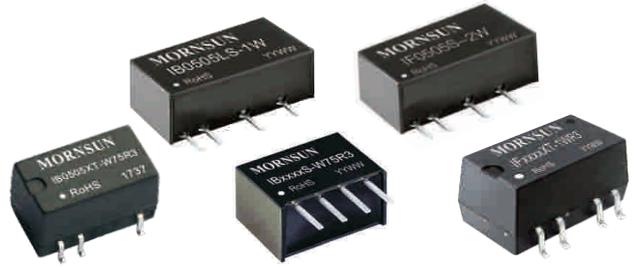

DC/DC Converter

## Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
IB0503S-W75R3	0.75W	4.75-5.25 (5VDC)	3.3V/200mA	1500VDC (SIP)	
IB0505S-W75R3			5V/150mA		
IB0509S-W75R3			9V/83mA		
IB0512S-W75R3			12V/62mA		
IB0515S-W75R3			15V/50mA		
IB0505LS-1WR3	1W	4.75-5.25 (5VDC)	5V/200mA	1500VDC (SIP)	
IB0509LS-1WR3			9V/111mA		
IB0512LS-1WR3			12V/84mA		
IB0515LS-1WR3			15V/67mA		
IB1205LS-1W*			5V/200mA		
IB1212LS-1W			12V/83mA		
IB1215LS-1W			15V/67mA		
IB1224LS-1W*			24V/42mA		
IB1505LS-1W*			5V/200mA		
IB1515LS-1W			15V/67mA		
IB2405LS-1W*	5V/200mA				
IB2412LS-1W	12V/83mA				
IB2415LS-1W	15V/67mA				
IB2424LS-1W*	24V/42mA				
IB0503XT-W75R3	0.75W	4.75-5.25 (5VDC)	3.3V/200mA	1500VDC (SIP)	
IB0505XT-W75R3			5V/150mA		
IB0509XT-W75R3			9V/83mA		
IB0512XT-W75R3			12V/62mA		
IB0515XT-W75R3			15V/50mA		
IB0503XT-1WR2	1W	4.75-5.25 (5VDC)	3.3V/243mA	1500VDC (SMD)	
IB0505XT-1WR2			5V/200mA		
IB0512XT-1WR2			12V/84mA		
IB0515XT-1WR2			15V/67mA		
IB1205XT-1WR2			5V/200mA		
IB1212XT-1WR2			12V/84mA		
IB1215XT-1WR2			15V/67mA		
IB1505XT-1WR2			5V/200mA		
IB2405XT-1WR2			5V/200mA		
IB2412XT-1WR2			12V/84mA		
IB2415XT-1WR2	15V/67mA				
IF0505XT-1WR2	1W	4.75-5.25 (5VDC)	5V/200mA	3000VDC (SMD)	
IF0512XT-1WR2			12V/83mA		
IF0515XT-1WR2			15V/67mA		
IF1205XT-1WR2			5V/200mA		
IF1212XT-1WR2			12V/83mA		
IF2405XT-1WR2	5V/200mA				
IF0505S-1WR3	1W	4.75-5.25 (5VDC)	5V/200mA	3000VDC (SIP)	
IF0509S-1WR3			9V/111mA		
IF0512S-1WR3			12V/84mA		
IF0515S-1WR3			15V/67mA		
IF1205S-1W*			5V/200mA		
IF1212S-1W	12V/83mA				
IF1215S-1W	15V/67mA				
IF2405S-1W*	5V/200mA				
IF2412S-1W	12V/83mA				
IF2415S-1W	15V/67mA				
IF0505RN-1W	1W	4.75-5.25(5VDC)	5V/200mA	3000VDC (DIP)	
IF1205RN-1W		11.4-12.6(12VDC)	5V/200mA		
IF0505RT-1W		4.75-5.25(5VDC)	5V/200mA		
IF1205RT-1W		11.4-12.6(12VDC)	5V/200mA		
IB0505S-2W	2W	4.75-5.25(5VDC)	5V/400mA	1000VDC (SIP)	
IB1205S-2W			5V/400mA		
IB1212S-2W			12V/150mA		
IB1215S-2W			15V/133mA		
IB1505S-2W			5V/400mA		
IB2405S-2W	5V/400mA				
IB2415S-2W	5V/400mA				


Note: 1. Short circuit protection time of products marked with \* is 1s;  
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.

## Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
IF0505S-2W	2W	4.75-5.25(5VDC)	5V/400mA	3000VDC (SIP)	
IF1205S-2W		11.4-12.6(12VDC)	5V/400mA		
IF2405S-2W		22.8-25.2(24VDC)	5V/400mA		

## Package Dimension

**IB\_XT-1WR2, IF\_XT-1WR2 Series** LxWxH: 15.24x11.20x7.25(mm)

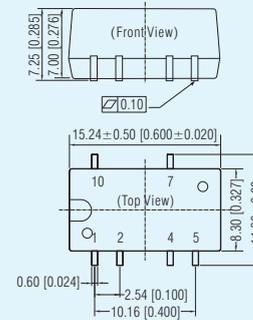


### Pin-Out

Pin	Function
1	GND
2	Vin
4	OV
5	OV
7	+Vo
10	NC

NC: No connection.

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

**IF\_S-1W, IB\_LS-1W, IF\_S-1WR3, IB\_LS-1WR3, IB\_S-2W, IF\_S-2W Series**

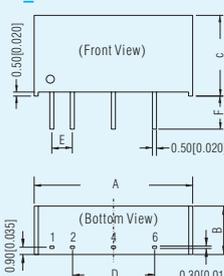

### Pin-Out


Pin	1	2	4	6
Function	Vin	GND	OV	+Vo

### Outline & Dimensions

NO.	IF_S-1W IB_LS-1WR3 IF_S-1WR3	IB/IF_S-2W	IB_LS-1W
A	19.65	19.65	19.65
B	6.00	7.05	6.00
C	10.16	10.16	10.16
D	10.16	10.16	10.16
E	2.54	2.54	2.54
F	4.10	4.10	4.10

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

**IF\_RN-1W Series** LxWxH: 19.50x9.50x4.68(mm)

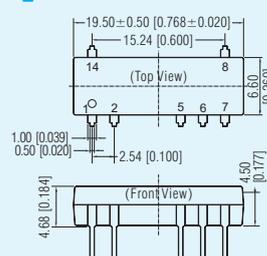

### Pin-Out


Pin	Function
1	Vin
2	GND
5	OV
6	+Vo
Others	NC

NC: No connection.


Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

## Package Dimension


**IF\_RT-1W Series** LxWxH: 19.50x10.53x5.00(mm)

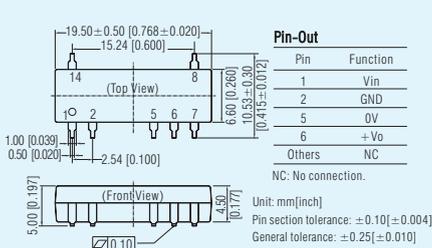

**IB05\_XT-W75R3** LxWxH: 13.20x11.40x7.25(mm)

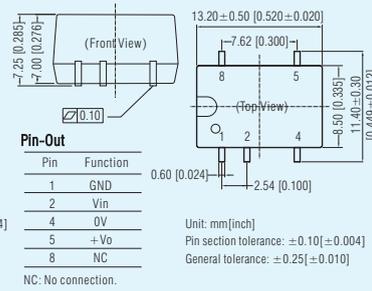

**IB05\_S-W75R3 Series** LxWxH: 11.60x6.00x10.16(mm)

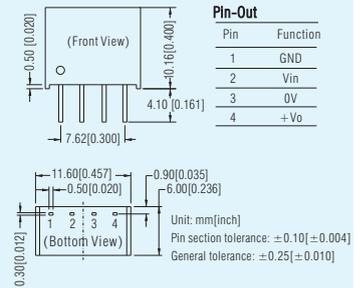


## 0.5-2A Non-isolated Switching Regulator

### Features

- Operating temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Efficiency up to 96%
- No-load input current as low as 0.1 mA
- Negative output available: R3 series
- Pin-Out compatible with LM78XX Linear regulators
- Continuous short-circuit protection

**UL** **US** **CE** **CB** **RoHS**

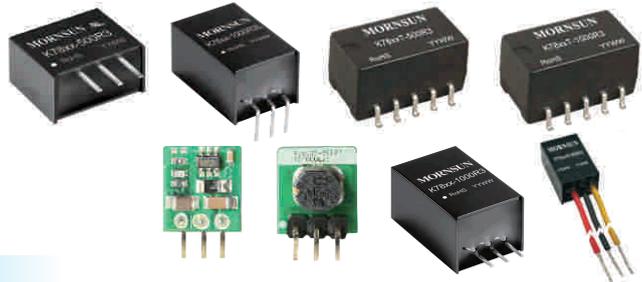

### Product Program

Model Number	Input Voltage Range (Nominal)	Output Voltage (VDC)	Output Current (mA)	Certification
K78(L)03-500R3	4.75-36 (24VDC)	3.3	500	<b>UL</b> <b>CE</b> <b>RoHS</b>
K78(L)05-500R3	6.5-36 (24VDC)	5	500	
	7-31 (12VDC)	-5	-300	
K7809-500R3	12-36 (24VDC)	9	500	
K78(L)12-500R3	15-36 (24VDC)	12	500	<b>UL</b> <b>CE</b> <b>RoHS</b> <b>CB</b>
	8-24 (12VDC)	-12	-150	
K78(L)15-500R3	19-36 (24VDC)	15	500	
	8-21 (12VDC)	-15	-150	
K7803-1000R3(L)	6-36 (24VDC)	3.3	1000	<b>UL</b> <b>CE</b> <b>RoHS</b> <b>CB</b>
	K7805-1000R3(L)	8-36 (24VDC)	5	
		8-27 (12VDC)	-5	
K7809-1000R3(L)	13-36 (24VDC)	9	1000	
K7812-1000R3(L)	16-36 (24VDC)	12	1000	<b>UL</b> <b>CE</b> <b>RoHS</b> <b>CB</b>
	K7815-1000R3(L)	8-20 (12VDC)	-12	
		20-36 (24VDC)	15	
	8-18 (12VDC)	-15	-300	
K78L03-1000R3	6-36 (24VDC)	3.3	1000	<b>UL</b> <b>CE</b> <b>RoHS</b> <b>CB</b>
	K78L05-1000R3	8-36 (24VDC)	5	
		8-27 (12VDC)	-5	
K78L12-1000R3	16-36 (24VDC)	12	1000	
	K78L15-1000R3	8-20 (12VDC)	-12	-300
		20-36 (24VDC)	15	1000
	8-18 (12VDC)	-15	-300	
K7803M-1000R3	16-36 (24VDC)	3.3	1000	<b>UL</b> <b>CE</b> <b>RoHS</b> <b>CB</b>
	K7805M-1000R3	8-36 (24VDC)	5	
		8-27 (12VDC)	-5	
K7809M-1000R3	13-36 (24VDC)	9	1000	
K7812M-1000R3	16-36 (24VDC)	12	1000	<b>UL</b> <b>CE</b> <b>RoHS</b> <b>CB</b>
	K7815M-1000R3	8-20 (12VDC)	-12	
		20-36 (24VDC)	15	
	8-18 (12VDC)	-15	-300	

### Product Program


Model Number	Input Voltage Range (Nominal)	Output Voltage (VDC)	Output Current (mA)	Certification			
K78U03-500(L)	9-72(48VDC)	3.3	500	<b>RoHS</b>			
K78U05-500(L)	9-72(48VDC)	5					
K78U12-500(L)	17-72(48VDC)	12					
K7803-1500(L)	4.75-18 (12VDC)	3.3	1500	<b>RoHS</b>			
K7805-1500(L)	6.5-18 (12VDC)	5.0					
K7803-2000(L)	4.75-18 (12VDC)	3.3	2000	<b>RoHS</b>			
K7805-2000(L)	7-18 (12VDC)	5.0					
K78X6-2000(L)	8.5-18 (12VDC)	6.5					
K7801T-500R3	4.75-28(12VDC)	1.5	500	<b>CE</b> (pending) <b>RoHS</b>			
K78X2T-500R3	4.75-28(12VDC)	1.8					
K7802T-500R3	4.75-32(12VDC)	2.5					
K7803T-500R3	4.75-36(24VDC)	3.3					
K7805T-500R3	6.5-36(24VDC)	5					
K78X6T-500R3	8-36(24VDC)	6.5					
K7809T-500R3	12-36(24VDC)	9					
K7812T-500R3	15-36(24VDC)	12					
K7815T-500R3	19-36(24VDC)	15					
K7801T-1000R3	4.75-32(12VDC)	1.5					
K78X2T-1000R3	4.75-32(12VDC)	1.8	1000	<b>CE</b> (pending) <b>RoHS</b>			
K7802T-1000R3	4.75-32(12VDC)	2.5					
K7803T-1000R3	6.5-36(24VDC)	3.3					
K7805T-1000R3	8-36(24VDC)	5					
K78X6T-1000R3	10-36(24VDC)	6.5					
K7809T-1000R3	13-36(24VDC)	9					
K7812T-1000R3	16-36(24VDC)	12					
K7803W-500R3	4.75-36 (24VDC)	3.3			500	<b>RoHS</b>	
K7805W-500R3	6.5-36 (24VDC)	5					500
		7-31 (12VDC)					-5
K7809W-500R3	12-36 (24VDC)	9	500				
K7812W-500R3	15-36 (24VDC)	12	500				
	8-24 (12VDC)	-12	-150				
K7815W-500R3	19-36 (24VDC)	15	500				
	8-21 (12VDC)	-15	-150				

Note: 1. Series with suffix "L" are available for 90° pin-out.  
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices are available.


• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

**Package Dimension**

**K78-1000R3, K78U-500, K78-1500, K78-2000 Series**  
LxWxH: 11.50x9.00x17.50(mm)

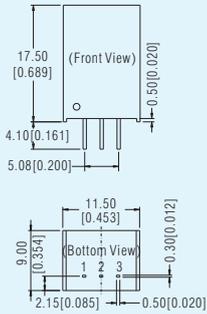

**K78-1000R3L, K78U-500L, K78-1500L, K78-2000L Series**  
LxWxH: 19.00x11.50x9.00(mm)

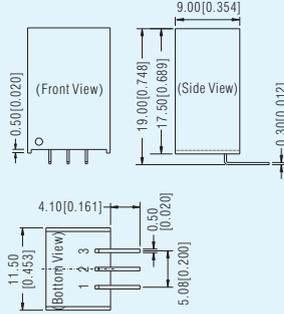

**K78-1000R3(L) K78U-500(L)/K78-1500(L)/K78-2000(L)**


**Pin-Out**

Pin	Positive output	Negative output
1	Vin	Vin
2	GND	-Vo
3	+Vo	GND

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

**K78L-500R3 Series (Open Frame)**

LxWxH: 10.00x7.20x11.00(mm)

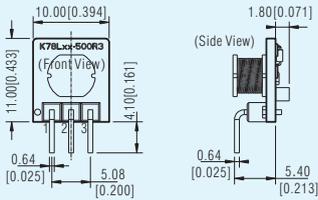


**Pin-Out**

Pin	Positive output	Negative output
1	Vin	Vin
2	GND	-Vo
3	+Vo	GND

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

**k78xxM-1000R3 Series** LxWxH: 10.16x11.60x8.00(mm)

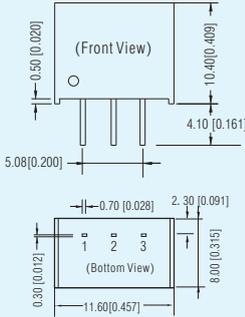


**Pin-Out**

Pin	Positive output	Negative output
1	Vin	Vin
2	GND	-Vo
3	+Vo	GND

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

**K78\_T-500R3/K78\_T-1000R3 Series** LXWXH: 11.40X15.24X8.25(mm)

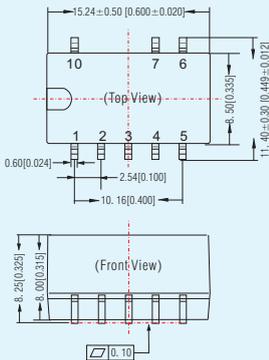


**Pin-Out**

Pin	Function
1	+Vin
2	+Vin
3	GND
4	+Vout
5	+Vout
6	vadj
7	GND
10	Remote on/off

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.020]$

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$


**K78-500R3 Series (Potting)** LxWxH: 11.60x7.55x10.16(mm)

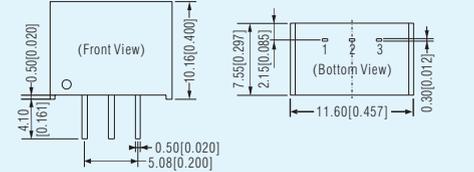

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$

**K78L-1000R3 Series (Open Frame)**

LxWxH: 11.50x7.20x17.50(mm)

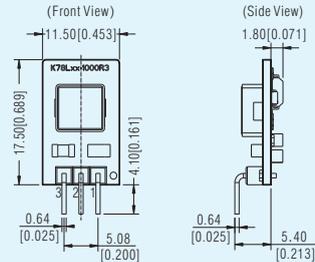


**Pin-Out**

Pin	Positive output	Negative output
1	Vin	Vin
2	GND	-Vo
3	+Vo	GND

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

**K78xxW-500R3 Series** LXWXH: 17.50X11.50X9.00(mm)

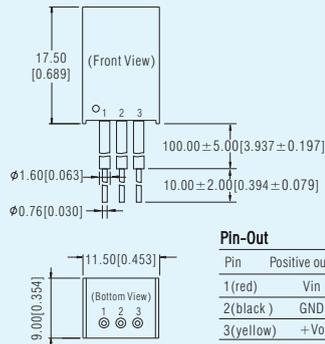

**Pin-Out**

Pin	Positive output	Negative output
1 (red)	Vin	Vin
2 (black)	GND	-Vo
3 (yellow)	+Vo	GND

Unit: mm[inch]  
引线规格: UI1569 AWG22 (300V 105°C)  
General tolerance:  $\pm 0.50[\pm 0.020]$

# 1W 2:1 Wide Input Voltage, Isolated & Regulated Output Series

## Features

- Suitable for communication, instrumentation and industrial electronics applications
- Operating temperature: -40°C to +85°C
- Low ripple & noise
- High power density
- Remote ON/OFF
- Continuous short-circuit protection, self-recovery
- EN60950 approval




Product Program 2:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
WRA0505S-1WR2	1W	4.5-9 (5VDC)	±5V/±100mA	1500VDC (SIP)	 
WRA0512S-1WR2			±12V/±42mA		
WRA0515S-1WR2			±15V/±33mA		
WRB0503S-1WR2			3.3V/303mA		
WRB0505S-1WR2			5V/200mA		
WRB0512S-1WR2			12V/83mA		
WRB0515S-1WR2			15V/67mA		
WRB0524S-1WR2			24V/42mA		
WRA1205S-1WR2			1W		
WRA1212S-1WR2	±12V/±42mA				
WRA1215S-1WR2	±15V/±33mA				
WRB1203S-1WR2	3.3V/303mA				
WRB1205S-1WR2	5V/200mA				
WRB1209S-1WR2	9V/111mA				
WRB1212S-1WR2	12V/83mA				
WRB1215S-1WR2	15V/67mA				
WRB1224S-1WR2	24V/42mA				
WRA2405S-1WR2	1W	18-36 (24VDC)	±5V/±100mA	1500VDC (SIP)	 
WRA2409S-1WR2			±9V/±56mA		
WRA2412S-1WR2			±12V/±42mA		
WRA2415S-1WR2			±15V/±33mA		
WRB2403S-1WR2			3.3V/303mA		
WRB2405S-1WR2			5V/200mA		
WRB2412S-1WR2			12V/83mA		
WRB2415S-1WR2			15V/67mA		
WRB2424S-1WR2			24V/42mA		
WRA4805S-1WR2	1W	36-75 (48VDC)	±5V/±100mA	1500VDC (SIP)	 
WRA4812S-1WR2			±12V/±42mA		
WRA4815S-1WR2			±15V/±33mA		
WRB4803S-1WR2			3.3V/303mA		
WRB4805S-1WR2			5V/200mA		
WRB4812S-1WR2			12V/83mA		
WRB4815S-1WR2	15V/67mA				

Product Program 2:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
WRE0505S-1WR2	1W	4.5-9 (5VDC)	±5V/±100mA	3000VDC (SIP)	 
WRE0512S-1WR2			±12V/±42mA		
WRE0515S-1WR2			±15V/±33mA		
WRF0505S-1WR2			5V/200mA		
WRF0512S-1WR2			12V/83mA		
WRF0515S-1WR2			15V/67mA		
WRE1205S-1WR2			±5V/±100mA		
WRE1212S-1WR2			±12V/±42mA		
WRE1215S-1WR2			±15V/±33mA		
WRF1203S-1WR2	1W	9-18 (12VDC)	3.3V/303mA	3000VDC (SIP)	 
WRF1205S-1WR2			5V/200mA		
WRF1209S-1WR2			9V/111mA		
WRF1212S-1WR2			12V/83mA		
WRF1215S-1WR2			15V/67mA		
WRE2405S-1WR2			±5V/±100mA		
WRE2412S-1WR2	±12V/±42mA				
WRE2415S-1WR2	±15V/±33mA				
WRF2403S-1WR2	1W	18-36 (24VDC)	3.3V/303mA	3000VDC (SIP)	 
WRF2405S-1WR2			5V/200mA		
WRF2412S-1WR2			12V/83mA		
WRF2415S-1WR2			15V/67mA		
WRF2424S-1WR2	24V/42mA				
WRE4805S-1WR2	1W	36-75 (48VDC)	±5V/±100mA	3000VDC (SIP)	 
WRE4812S-1WR2			±12V/±42mA		
WRE4815S-1WR2			±15V/±33mA		
WRF4803S-1WR2			3.3V/303mA		
WRF4805S-1WR2			5V/200mA		
WRF4812S-1WR2			12V/83mA		
WRF4815S-1WR2	15V/67mA				

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.

## Package Dimension

WRA/B\_S-1WR2, WRE/F\_S-1WR2 Series LxWxH: 22.00x9.50x12.00(mm)

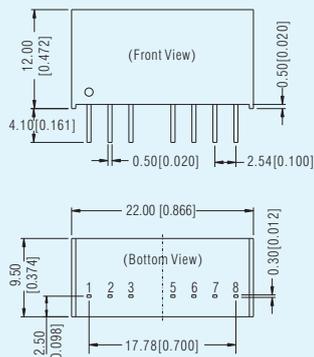

### Pin-Out

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	Ctrl	Ctrl
5	NC	NC
6	+Vo	+Vo
7	OV	OV
8	CS	-Vo

NC: No connection.

Unit: mm[inch]  
 Pin section tolerance: ±0.10[±0.004]  
 General tolerance: ±0.25[±0.010]

# 2W 2:1 Wide Input Voltage, 1500VDC Isolated & Regulated Output Series

RoHS

## Features

- Suitable for communication, instrumentation and industrial electronics applications
- Operating temperature: -40°C to +85°C
- Low ripple & noise
- High power density, compact package
- Continuous short-circuit protection, self-recovery




## Product Program 2:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
WRB1203N-1W6	2W	9-18 (12VDC)	3.3V/500mA	1500VDC (DIP)	RoHS
WRB1205N-2W			5V/400mA		
WRB1212N-2W			12V/167mA		
WRB1215N-2W		18-36 (24VDC)	15V/133mA		
WRB2403N-1W6			3.3V/500mA		
WRB2405N-2W			5V/400mA		
WRB2412N-2W			12V/167mA		
WRB2415N-2W			15V/133mA		

Note: 1. Series with suffix "N" are standard DIP16 packaged with plastic case and detailed dimension please refer to illustration;  
 2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.

## Package Dimension

WRB\_N-2W Series LxWxH: 23.80x13.70x7.60(mm)

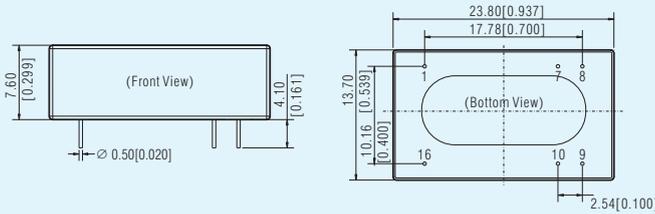

### Pin-Out

Pin	Function
1	GND
7	NC
8	NC
9	+Vo
10	OV
16	Vin

Unit: mm[inch]  
 Pin diameter tolerance: ±0.10[±0.004]  
 General tolerance: ±0.25[±0.010]

# 20W Ultra-wide Input Voltage, 1500VDC Isolated & Regulated Output Series


RoHS

## Features

- Suitable for automotive application
- Operating temperature: -40°C to +85°C
- Efficiency up to 82%
- Input voltage as low as 6VDC
- Standby power consumption as low as 0.4W
- Meet CISPR22/EN55022 CLASS A
- Input under-voltage, output over-voltage, over-current and short-circuit protections



## Package Dimension LxWxH: 50.80x40.60x11.8(mm)

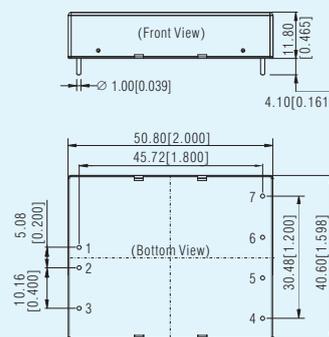

### Pin-Out

Pin	Function
1	Vin
2	GND
3	No Pin
4	OV
5	+Vo
6	No Pin
7	No Pin

Unit: mm[inch]  
 Pin diameter tolerance: ±0.10[±0.004]  
 General tolerance: ±0.50[±0.020]

## Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation	Certification
UW2405D-20W	20W	6-50 (24VDC)	5V/4000mA	1500VDC	RoHS
UWD240512D-20W			5V/3500mA 12V/500mA		

Note: Special input, output and power customization is acceptable such as series less than 4.5VDC input.

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# 3W 2:1 Wide Input Voltage, 1500VDC Isolated & Regulated Output Series

CE RoHS

## Features

- Suitable for communication, instrumentation and industrial electronics applications
- Operating temperature: -40°C to +85°C
- Low ripple & noise
- High power density
- Continuous short-circuit protection, self-recovery
- EN60950 approval




Product Program 2:1 Input series									
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
* WRA0505S-3WR2	3W	4.5-9 (5VDC)	±5V/±250mA	1500VDC (SIP)	CE RoHS				
* WRA0512S-3WR2			±12V/±104mA						
* WRA0515S-3WR2			±15V/±83mA						
* WRA0524S-3WR2			±24V/±52mA						
* WRB0503S-3WR2			3.3V/758mA						
* WRB0505S-3WR2			5V/500mA						
* WRB0509S-3WR2			9V/278mA						
* WRB0512S-3WR2			12V/208mA						
* WRB0515S-3WR2			15V/167mA						
* WRB0524S-3WR2			24V/104mA						
* WRA1205S-3WR2			±5V/±300mA			9-18 (12VDC)	±9V/±167mA	1500VDC (SIP)	CE RoHS
* WRA1209S-3WR2			±12V/±125mA						
* WRA1212S-3WR2	±15V/±100mA								
* WRA1215S-3WR2	±15V/±100mA								
* WRB1203S-3WR2	3.3V/758mA								
* WRB1205S-3WR2	5V/600mA								
* WRB1206S-3WR2	6V/500mA								
* WRB1209S-3WR2	9V/333mA								
* WRB1212S-3WR2	12V/250mA								
* WRB1215S-3WR2	15V/200mA								
* WRB1224S-3WR2	24V/125mA								
* WRA2405S-3WR2	±5V/±300mA	18-36 (24VDC)	±9V/±167mA	1500VDC (SIP)	CE RoHS				
* WRA2409S-3WR2	±12V/±125mA								
* WRA2412S-3WR2	±15V/±100mA								
* WRA2415S-3WR2	±15V/±100mA								
* WRB2403S-3WR2	3.3V/758mA								
* WRB2406S-3WR2	5V/600mA								
* WRB2409S-3WR2	9V/333mA								
* WRB2412S-3WR2	12V/250mA								
* WRB2415S-3WR2	15V/200mA								
* WRB2424S-3WR2	24V/125mA								
* WRA4805S-3WR2	±5V/±300mA		36-75 (48VDC)			±12V/±125mA	1500VDC (SIP)	CE RoHS	
* WRA4812S-3WR2	±15V/±100mA								
* WRA4815S-3WR2	±15V/±100mA								
* WRB4803S-3WR2	3.3V/758mA								
* WRB4806S-3WR2	5V/600mA								
* WRB4812S-3WR2	12V/250mA								
* WRB4815S-3WR2	15V/200mA								
* WRB4824S-3WR2	24V/125mA								
* WRA0505ZP-3WR2	±5V/±300mA	4.5-9 (5VDC)		±9V/±166mA	1500VDC (DIP)	CE RoHS			
* WRA0509ZP-3WR2	±12V/±125mA								
* WRA0512ZP-3WR2	±15V/±100mA								
* WRA0515ZP-3WR2	±15V/±100mA								
* WRB0505ZP-3WR2	5V/600mA								
* WRB0512ZP-3WR2	12V/250mA								
* WRB0515ZP-3WR2	15V/200mA								
* WRA1205ZP-3WR2	±5V/±300mA		9-18 (12VDC)	±9V/±166mA			1500VDC (DIP)	CE RoHS	
* WRA1209ZP-3WR2	±12V/±125mA								
* WRA1212ZP-3WR2	±15V/±100mA								
* WRA1215ZP-3WR2	±15V/±100mA								
* WRB1203ZP-3WR2	3.3V/909mA								
* WRB1205ZP-3WR2	5V/600mA								
* WRB1212ZP-3WR2	12V/250mA								
* WRB1215ZP-3WR2	15V/200mA								
* WRB1224ZP-3WR2	24V/125mA								
* WRA2405ZP-3WR2	±5V/±300mA	18-36 (24VDC)		±12V/±125mA	1500VDC (DIP)	CE RoHS			
* WRA2412ZP-3WR2	±15V/±100mA								
* WRA2415ZP-3WR2	±15V/±100mA								
* WRB2403ZP-3WR2	3.3V/909mA								
* WRB2405ZP-3WR2	5V/600mA								

Product Program 2:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
WRB2409ZP-3WR2	3W	18-36 (24VDC)	9V/333mA	1500VDC (DIP)	CE RoHS
WRB2412ZP-3WR2			12V/250mA		
WRB2415ZP-3WR2			15V/200mA		
WRB2424ZP-3WR2			24V/125mA		
WRA4805ZP-3WR2	3W	36-75 (48VDC)	±5V/±300mA	1500VDC (DIP)	CE RoHS
WRA4812ZP-3WR2			±12V/±125mA		
WRA4815ZP-3WR2			±15V/±100mA		
WRA4824ZP-3WR2			±24V/±63mA		
WRB4803ZP-3WR2			3.3V/909mA		
WRB4805ZP-3WR2			5V/600mA		
WRB4812ZP-3WR2			12V/250mA		
WRB4815ZP-3WR2			15V/200mA		
WRB4824ZP-3WR2	24V/125mA				

- Note: 1. Series with suffix 'ZP' are standard DIP24 packaged with aluminum casing and detailed dimension please refer to illustration;  
 2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department  
 3. Products marked with "\*" feature remote pin and remote control function

## Package Dimension

WRA/B\_S-3WR2 Series LxWxH: 22.00x9.50x12.00(mm)

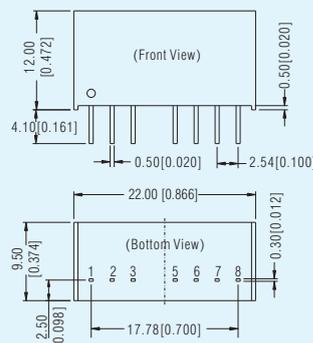


### Pin-Out

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	Ctrl	Ctrl
5	NC	NC
6	+Vo	+Vo
7	OV	OV
8	CS	-Vo

NC: No connection.

Unit: mm[inch]  
 Pin section tolerance: ±0.10[±0.004]  
 General tolerance: ±0.25[±0.010]

WRA/B\_ZP-3WR2 LxWxH: 32.00x20.00x10.80(mm)

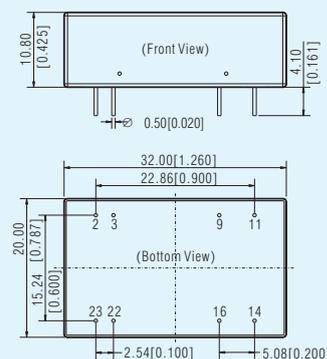

### Pin-Out

Pin	Single	Dual
2,3	GND	GND
9	No Pin	OV
11	NC	-Vo
14	+Vo	+Vo
16	OV	OV
22,23	Vin	Vin

NC: No connection.

Unit: mm[inch]  
 Pin diameter tolerance: ±0.10[±0.004]  
 General tolerance: ±0.50[±0.020]

# 3W 4:1 Wide Input Voltage, 1500VDC Isolated & Regulated Output Series

CE RoHS

## Features

- Suitable for communication, instrumentation and industrial electronics applications
- Operating temperature: -40°C to +85°C
- Low ripple & noise
- High power density
- Continuous short-circuit protection, self-recovery
- EN60950 approval




Product Program		4:1 Input series			
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
PWB2403ZP-3WR2	3W	9-36 (24VDC)	3.3V/909mA	1500VDC (DIP)	CE RoHS
PWB2405ZP-3WR2			5V/600mA		
PWB2409ZP-3WR2			9V/333mA		
PWB2412ZP-3WR2			12V/250mA		
PWB2415ZP-3WR2			15V/200mA		
PWB2424ZP-3WR2			24V/125mA		
PWB4803ZP-3WR2	3W	18-75 (48VDC)	3.3V/909mA	1500VDC (DIP)	CE RoHS
PWB4805ZP-3WR2			5V/600mA		
PWB4809ZP-3WR2			9V/333mA		
PWB4812ZP-3WR2			12V/250mA		
PWB4815ZP-3WR2			15V/200mA		
PWB4824ZP-3WR2			24V/125mA		

Note: 1. Series with suffix "ZP" are standard DIP24 packaged with aluminum casing and detailed dimension please refer to illustration;  
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.

## Package Dimension

PWB\_ZP-3WR2 Series LxWxH: 32.00x20.00x10.80(mm)

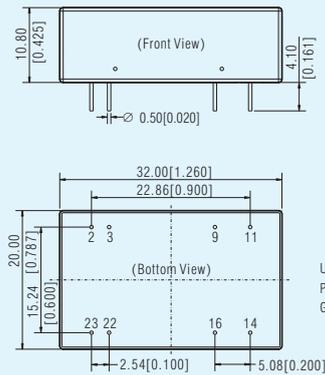

## Pin-Out

Pin	Function
2,3	GND
11	NC
14	+Vo
16	OV
22,23	Vin

NC: No connection.

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$   
General tolerance:  $\pm 0.50 [\pm 0.020]$

# 3W 4:1 Wide Input Voltage, 1500VDC Isolated & Regulated Output Series (SMD)

CE RoHS CB

## Features


- Suitable for communication, instrumentation and control electric power applications
- Operating temperature: -40°C to +85°C
- Efficiency up to 84%
- Standby power consumption as low as 0.10W
- International standard pin-out
- Input under-voltage, output short-circuit and over-current protections
- IEC/UL/EN60950 approval



Product Program		4:1 Input series			
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
URB2405MT-3WR3	3W	9-36 (24VDC)	5V/600mA	1500VDC (SMD)	CE RoHS
URB2412MT-3WR3			12V/250mA		
URB2415MT-3WR3			15V/200mA		
URB2424MT-3WR3			24V/125mA		
URB2403MT-3WR3	3W	9-36 (24VDC)	3.3V/728mA	1500VDC (SMD)	RoHS
URB2409MT-3WR3			9V/333mA		
URB4803MT-3WR3			3.3V/728mA		
URB4805MT-3WR3			5V/600mA		
URB4812MT-3WR3	3W	18-75 (48VDC)	12V/250mA	1500VDC (SMD)	CE RoHS
URB4815MT-3WR3			15V/200mA		
URB4824MT-3WR3			24V/125mA		

## Package Dimension

URB\_ZM3MT-3WR3 LxWxH: 19.20x18.10x10.16(mm)

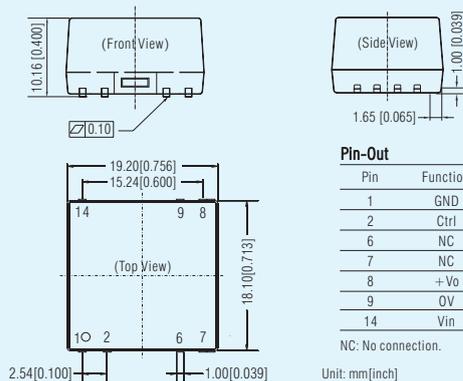

## Pin-Out

Pin	Function
1	GND
2	Ctrl
6	NC
7	NC
8	+Vo
9	OV
14	Vin

NC: No connection.

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10 [\pm 0.004]$   
General tolerance:  $\pm 0.50 [\pm 0.020]$


• This catalog is used to introduce our latest products, for more information, please contact our sales department

# 3W 2:1 Wide Input Voltage, 3000VDC Isolated & Regulated Output Series

CE RoHS

## Features

- Suitable for communication, instrumentation and industrial electronics applications
- Operating temperature: -40°C to +85°C
- Low ripple & noise
- High power density
- Remote ON/OFF
- Continuous short-circuit protection, self-recovery
- EN60950 approval

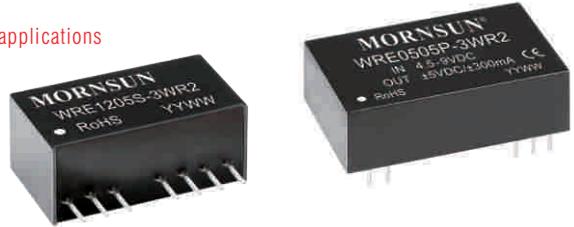


Product Program 2:1 Input series						
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification	
WRE0505S-3WR2	3W	4.5-9 (5VDC)	±5V/±250mA	3000VDC (SIP)	CE RoHS	
WRE0512S-3WR2			±12V/±104mA			
WRE0515S-3WR2			±15V/±83mA			
WRF0505S-3WR2			5V/500mA			
WRF0509S-3WR2			9V/278mA			
WRF0512S-3WR2			12V/208mA			
WRF0515S-3WR2	15V/167mA					
WRE1205S-3WR2	3W	9-18 (12VDC)	±5V/±300mA	3000VDC (SIP)	CE RoHS	
WRE1212S-3WR2			±12V/±125mA			
WRE1215S-3WR2			±15V/±100mA			
WRF1203S-3WR2			3.3V/758mA			
WRF1205S-3WR2			5V/600mA			
WRF1209S-3WR2			9V/333mA			
WRF1212S-3WR2			12V/250mA			
WRF1215S-3WR2			15V/200mA			
WRF1224S-3WR2			24V/125mA			
WRE2405S-3WR2			±5V/±300mA			
WRE2409S-3WR2	±9V/±167mA					
WRE2412S-3WR2	±12V/±125mA					
WRE2415S-3WR2	±15V/±100mA					
WRF2403S-3WR2	3.3V/758mA					
WRF2405S-3WR2	5V/600mA					
WRF2409S-3WR2	9V/333mA					
WRF2412S-3WR2	12V/250mA					
WRF2415S-3WR2	15V/200mA					
WRF2424S-3WR2	24V/125mA					
WRE4805S-3WR2	3W	36-75 (48VDC)	±5V/±300mA	3000VDC (SIP)	CE RoHS	
WRE4812S-3WR2			±12V/±125mA			
WRE4815S-3WR2			±15V/±100mA			
WRF4803S-3WR2			3.3V/758mA			
WRF4805S-3WR2			5V/600mA			
WRF4812S-3WR2			12V/250mA			
WRF4815S-3WR2	15V/200mA					
WRE0505P-3WR2	3W	4.5-9 (5VDC)	±5V/±300mA	3000VDC (DIP)	CE RoHS	
WRE0512P-3WR2			±12V/±125mA			
WRE0515P-3WR2			±15V/±100mA			
WRF0505P-3WR2			5V/600mA			
WRF0512P-3WR2			12V/250mA			
WRF0515P-3WR2			15V/200mA			
WRE1205P-3WR2	3W	9-18 (12VDC)	±5V/±300mA	3000VDC (DIP)	CE RoHS	
WRE1209P-3WR2			±9V/±166mA			
WRE1212P-3WR2			±12V/±125mA			
WRE1215P-3WR2			±15V/±100mA			
WRF1203P-3WR2			3.3V/909mA			
WRF1205P-3WR2			5V/600mA			
WRF1212P-3WR2			12V/250mA			
WRF1215P-3WR2			15V/200mA			
WRF1224P-3WR2			24V/125mA			
WRE2405P-3WR2			±5V/±300mA			
WRE2412P-3WR2	±12V/±125mA					
WRE2415P-3WR2	±15V/±100mA					
WRF2403P-3WR2	3.3V/909mA					
WRF2405P-3WR2	5V/600mA					
WRF2412P-3WR2	12V/250mA					
WRF2415P-3WR2	15V/200mA					
WRF2424P-3WR2	24V/125mA					

Product Program 2:1 Input series						
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification	
WRE4803P-3WR2	3W	36-75 (48VDC)	±3.3V/±454mA	3000VDC (DIP)	CE RoHS	
WRE4805P-3WR2			±5V/±300mA			
WRE4812P-3WR2			±12V/±125mA			
WRE4815P-3WR2			±15V/±100mA			
WRF4803P-3WR2			3.3V/909mA			
WRF4805P-3WR2			5V/600mA			
WRF4812P-3WR2			12V/250mA			
WRF4815P-3WR2			15V/200mA			


Note: 1. Series with suffix "P" are standard DIP24 packaged with plastic casing and detailed dimension please refer to illustration;  
2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-BQ2D, FI-BQ3D and FT-BX1D are available. For more information, please contact our sales department.

## Package Dimension

WRE/F\_S-3WR2 Series LxWxH: 22.00x9.50x12.00(mm)

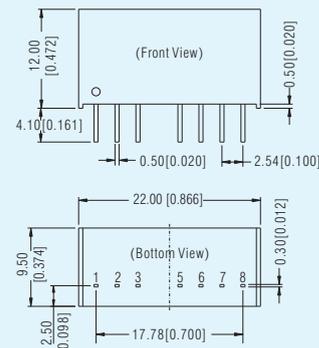

WRE/F\_P-3WR2 Series LxWxH: 31.60x20.30x10.20(mm)

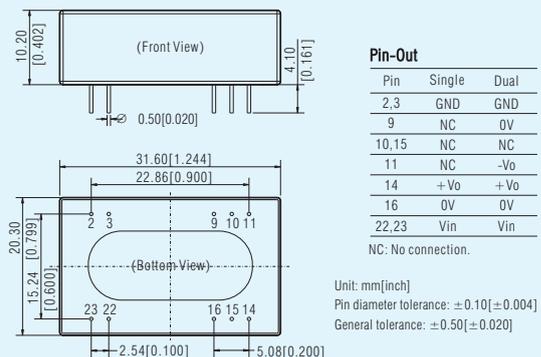

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

## 3W 2:1 Wide Input Voltage, 4300VDC Isolated & Regulated RoHS Output Series (Automotive)

### Features


- Suitable for automotive application
- Operating temperature: -40°C to +105°C
- Efficiency up to 82%
- Isolation: 4300VDC
- Materials meet AEC-Q standards
- Internal surface mounted design
- International standard pin-out



### Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation	Certification
CWRF1215S-3W	3W	7-18 (12VDC)	15V/200mA	4300VDC	RoHS

### Package Dimension LxWxH: 22.00x9.50x12.00(mm)

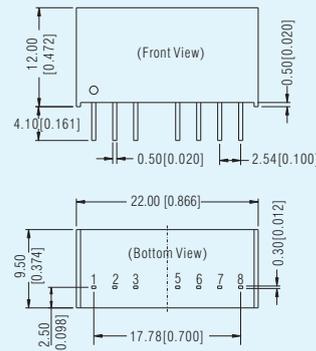

### Pin-Out

Pin	Function
1	GND
2	Vin
3	NC
5	NC
6	+Vo
7	0V
8	CS

NC: No connection.

Unit: mm[inch]

Pin section tolerance:  $\pm 0.10 [\pm 0.004]$

General tolerance:  $\pm 0.25 [\pm 0.010]$

## 6W 4:1 Wide Input Voltage, 6000VDC High Isolated & Regulated Output Series (Medical)


CE RoHS

### Features

- 4:1 Ultra wide input voltage range
- High efficiency up to 85%
- Standby power consumption as low as 0.12W
- Isolation: 6000VDC (enhanced)
- Operating temperature range: -40°C to +85°C
- International standard pin-out
- Input under-voltage, output over-voltage, over-current and short-circuit protections



### Package Dimension LxWxH: 31.60x20.30x10.20(mm)

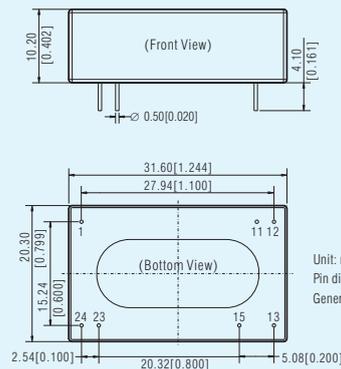

### Pin-Out

Pin	Function
1	Vin
11	No pin
12	0V
13	+Vo
15	No pin
23	GND
24	GND

Unit: mm[inch]

Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$

General tolerance:  $\pm 0.50 [\pm 0.020]$

### Product Program

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation	Certification
URH2405P-6WR3	6W	9-36 (24VDC)	5V/1200mA	6000VDC	CE RoHS
URH2406P-6WR3			6V/1000mA		
URH2409P-6WR3			9V/667mA		
URH2412P-6WR3			12V/500mA		
URH2415P-6WR3			15V/400mA		
URH2424P-6WR3	6W	18-75 (48VDC)	24V/250mA	6000VDC	CE RoHS
URH4805P-6WR3			5V/1200mA		
URH4809P-6WR3			9V/667mA		
URH4812P-6WR3			12V/500mA		
URH4815P-6WR3			15V/400mA		
URH4824P-6WR3	24V/250mA				

Note: If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-BO2D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# 6W 2:1 Wide Input Voltage, 1500VDC Isolated & Regulated Output Series

## Features

- Suitable for industrial control, electric power, instrumentation and communication applications
- Operating temperature: -40°C to +85°C/-40°C to +105°C
- Standby power consumption as low as 0.12W
- International standard pin-out
- Meet CISPR22/EN55022 CLASS A
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- IEC/EN/UL60950 approval, EN62368 approval (pending)




Product Program		2:1 Input series							
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
VRA1205YMD-6WR3	6W	9-18 (12VDC)	±5V/±600mA	1500VDC (DIP)					
VRA1212YMD-6WR3			±12V/±250mA						
VRB1205YMD-6WR3			5V/1200mA						
VRB1212YMD-6WR3			12V/500mA						
VRA2405YMD-6WR3			±5V/±600mA						
VRA2412YMD-6WR3	6W	18-36 (24VDC)	±12V/±250mA	1500VDC (DIP)					
VRA2415YMD-6WR3			±15V/±200mA						
VRB2403YMD-6WR3			3.3V/1500mA						
VRB2405YMD-6WR3			5V/1200mA						
VRB2412YMD-6WR3			12V/500mA						
VRB2415YMD-6WR3			15V/400mA						
VRB2424YMD-6WR3			24V/250mA						
VRB4803YMD-6WR3	6W	36-75 (48VDC)	3.3V/1500mA	1500VDC (DIP)					
VRB4805YMD-6WR3			5V/1200mA						
VRB4812YMD-6WR3			12V/500mA						
VRB4815YMD-6WR3			15V/400mA						
VRB4824YMD-6WR3			24V/250mA						
VRA1205ZP-6WR3	6W	9-18 (12VDC)	±5V/±600mA	1500VDC (DIP)					
VRA1212ZP-6WR3			±12V/±250mA						
VRA1215ZP-6WR3			±15V/±200mA						
VRA1224ZP-6WR3			±24V/±125mA						
VRB1203ZP-6WR3			3.3V/1500mA						
VRB1205ZP-6WR3			5V/1200mA						
VRB1212ZP-6WR3			12V/500mA						
VRB1215ZP-6WR3			15V/400mA						
VRB1224ZP-6WR3			24V/250mA						
VRA2405ZP-6WR3			±5V/±600mA						
VRA2412ZP-6WR3			±12V/±250mA						
VRA2415ZP-6WR3			±15V/±200mA						
VRA2424ZP-6WR3			±24V/±125mA						
VRB2403ZP-6WR3			3.3V/1500mA						
VRB2405ZP-6WR3			5V/1200mA						
VRB2412ZP-6WR3	12V/500mA								
VRB2415ZP-6WR3	15V/400mA								
VRB2424ZP-6WR3	24V/250mA								
VRA4805ZP-6WR3	6W	36-75 (48VDC)	±5V/±600mA	1500VDC (DIP)					
VRA4812ZP-6WR3			±12V/±250mA						
VRA4815ZP-6WR3			±15V/±200mA						
VRA4824ZP-6WR3			±24V/±125mA						
VRB4803ZP-6WR3			3.3V/1500mA						
VRB4805ZP-6WR3			5V/1200mA						
VRB4812ZP-6WR3			12V/500mA						
VRB4815ZP-6WR3			15V/400mA						
VRB4824ZP-6WR3			24V/250mA						
* VRB1203S-6WR3			6W			9-18 (12VDC)	3.3V/1350mA	1600VDC (SIP)	
* VRB1205S-6WR3							5V/1200mA		
* VRB1209S-6WR3							9V/667mA		
* VRB1212S-6WR3							12V/500mA		
* VRB1215S-6WR3							15V/400mA		
* VRB1224S-6WR3							24V/250mA		
* VRB2403S-6WR3	3.3V/1350mA								
* VRB2405S-6WR3	5V/1200mA								
* VRB2409S-6WR3	9V/667mA								
* VRB2412S-6WR3	12V/500mA								
* VRB2415S-6WR3	15V/400mA								
* VRB2424S-6WR3	24V/250mA								

Note: 1. Series with suffix "ZP" are standard DIP24 packaged with aluminum alloy casing, with suffix "YMD" are 1\*1 packaged with aluminum alloy casing. And detailed dimension please refer to illustration;  
 2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.  
 3. Products marked with "\*" feature -40°C to +105°C operating temperature

## Package Dimension

VRA/B\_YMD-6WR3 Series LxWxH: 25.40x25.40x1.70(mm)

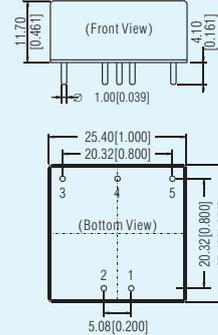


### Pin-Out

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	No Pin	OV
5	OV	-Vo

Unit: mm[inch]  
 Pin diameter tolerance: ±0.10[±0.004]  
 General tolerance: ±0.50[±0.020]

VRA/B\_ZP-6WR3 Series LxWxH: 32.00x20.00x10.80(mm)

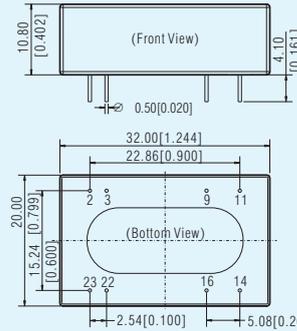


### Pin-Out

Pin	Single	Dual
2,3	GND	GND
9	No Pin	OV
11	NC	-Vo
14	+Vo	+Vo
16	OV	OV
22,23	Vin	Vin

Unit: mm[inch]  
 Pin diameter tolerance: ±0.10[±0.004]  
 General tolerance: ±0.50[±0.020]

VRB\_S-6WR3 Series LxWxH: 22.00x9.50x12.00(mm)

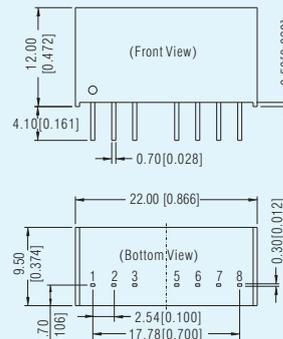

### Pin-Out

Pin	Function
1	GND
2	Vin
3	Ctrl
5	NC
6	+Vo
7	OV
8	CS

Unit: mm[inch]  
 Pin diameter tolerance: ±0.10[±0.004]  
 General tolerance: ±0.50[±0.020]

# 6W Ultra-thin Wide Input Voltage, Isolated&Regulated SMD/DIP DC/DC Converter

RoHS

## Features

- Suitable for industrial control, electric power, instrumentation and communication applications
- Operating temperature: -40°C to +85°C
- Isolation: 500VAC/1500VDC
- Standby power consumption as low as 0.12W
- Efficiency up to 86%
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- DIP/SMD package available



## Product Program 2:1 Input series


Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
VRB1205J(M)D/T-6W	6W	9-18 (12VDC)	5V/1200mA	1500VDC (DIP/SMD)	RoHS
VRB1212J(M)D/T-6W			12V/500mA		
VRB1215J(M)D/T-6W			15V/400mA		
VRB2403J(M)D/T-6W		18-36 (24VDC)	3.3V/1500mA		
VRB2405J(M)D/T-6W			5V/1200mA		
VRB2412J(M)D/T-6W			12V/500mA		
VRB2415J(M)D/T-6W	15V/400mA				

Note:

- 1.VRB\_J(M)D/T-6W includes 4 types: VRB\_JD-6W (DIP package without shell), VRB\_JMD-6W (DIP package with shell), VRB\_JT-6W (SMD package without shell) and VRB\_JT-6W (SMD package without shell)
2. Once input voltage exceeds the limit, it may cause irreversible damage
3. The above efficiency value is tested in the case of nominal input voltage and rated output load


## Package Dimension

VRB\_JD-6W (Open frame, DIP package) LxWxH: 31.60x18.10x6.10(mm)

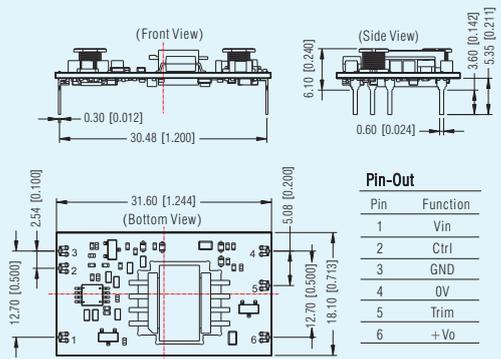


Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

VRB\_JT-6W (Open frame, SMD package) LxWxH: 31.60x18.10x6.30(mm)

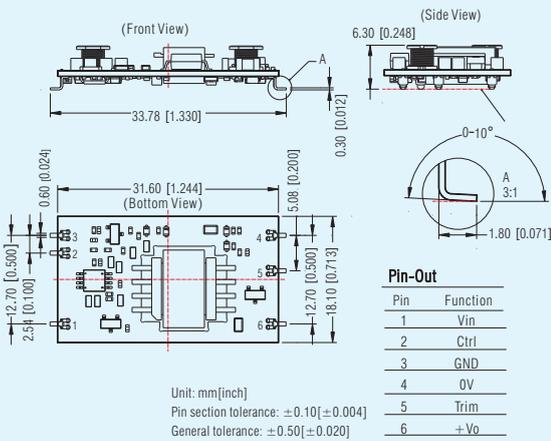


Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

VRB\_JMD-6W (DIP package with shell) LxWxH: 32.60x19.10x6.80(mm)

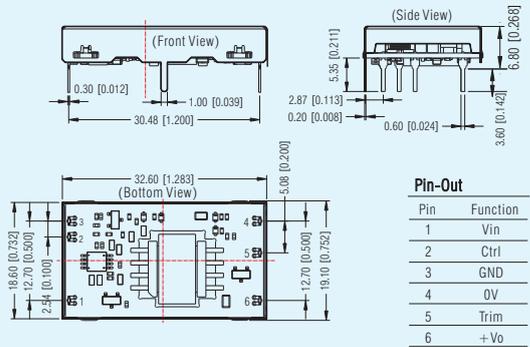

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

VRB\_JMT-6W (SMD package with shell) LxWxH: 32.60x19.10x7.00(mm)

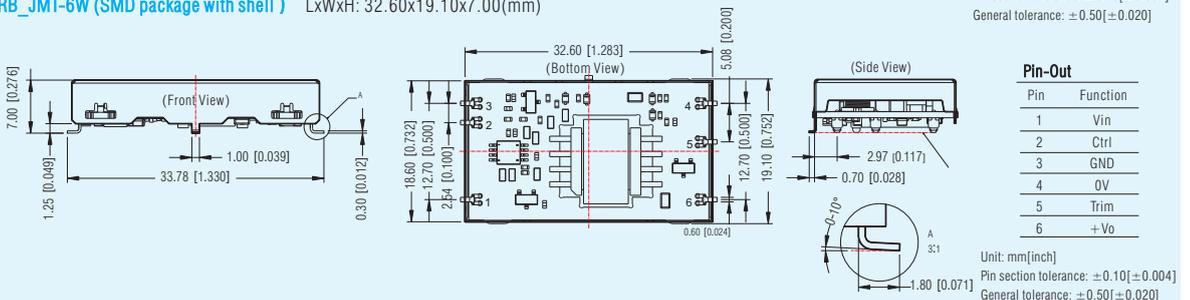

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.50[\pm 0.020]$

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# 6W 4:1 Wide Input Voltage, Isolated & Regulated Output Series

CE RoHS CB

## Features

- Suitable for industrial control, electric power, instrumentation and communication applications
- Operating temperature: -40°C to +85°C/-40°C to +105°C
- Standby power consumption as low as 0.12W
- International standard pin-out
- Meet CISPR22/EN55022 CLASS A
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- IEC/EN/UL60950 approval, EN62368 approval (pending)




Product Program 4:1 Input series									
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
URA2405YMD-6WR3	6W	9-36 (24VDC)	±5V/±600mA	1500VDC (DIP)					
URA2412YMD-6WR3			±12V/±250mA						
URA2415YMD-6WR3			±15V/±200mA						
URA2424YMD-6WR3			±24V/±125mA						
URB2403YMD-6WR3			3.3V/1500mA						
URB2405YMD-6WR3			5V/1200mA						
URB2409YMD-6WR3			9V/667mA						
URB2412YMD-6WR3			12V/500mA						
URB2415YMD-6WR3			15V/400mA						
URB2424YMD-6WR3			24V/250mA						
URA4805YMD-6WR3	6W	18-75 (48VDC)	±5V/±600mA	1500VDC (DIP)					
URA4812YMD-6WR3			±12V/±250mA						
URA4815YMD-6WR3			±15V/±200mA						
URB4803YMD-6WR3			3.3V/1500mA						
URB4805YMD-6WR3			5V/1200mA						
URB4812YMD-6WR3			12V/500mA						
URB4815YMD-6WR3			15V/400mA						
URB4824YMD-6WR3			24V/250mA						
URA2405ZP-6WR3			6W			9-36 (24VDC)	±5V/±600mA	1500VDC (DIP)	
URA2409ZP-6WR3							±9V/±333mA		
URA2412ZP-6WR3	±12V/±250mA								
URA2415ZP-6WR3	±15V/±200mA								
URA2424ZP-6WR3	±24V/±125mA								
URB2403ZP-6WR3	3.3V/1500mA								
URB2405ZP-6WR3	5V/1200mA								
URB2409ZP-6WR3	9V/667mA								
URB2412ZP-6WR3	12V/500mA								
URB2415ZP-6WR3	15V/400mA								
URB2424ZP-6WR3	24V/250mA								
URA4805ZP-6WR3	6W	18-75 (48VDC)	±5V/±600mA	1500VDC (DIP)					
URA4812ZP-6WR3			±12V/±250mA						
URA4815ZP-6WR3			±15V/±200mA						
URB4803ZP-6WR3			3.3V/1500mA						
URB4805ZP-6WR3			5V/1200mA						
URB4809ZP-6WR3			9V/667mA						
URB4812ZP-6WR3			12V/500mA						
URB4815ZP-6WR3			15V/400mA						
URB4824ZP-6WR3			24V/250mA						
URE2405P-6WR3			6W			9-36 (24VDC)	±5V/±600mA	3000VDC (DIP)	
URE2412P-6WR3	±12V/±250mA								
URE2415P-6WR3	±15V/±200mA								
URF2403P-6WR3	3.3V/1500mA								
URF2405P-6WR3	5V/1200mA								
URF2409P-6WR3	9V/667mA								
URF2412P-6WR3	12V/500mA								
URF2415P-6WR3	15V/400mA								
URF2424P-6WR3	24V/250mA								
URF4803P-6WR3	6W	18-75 (48VDC)		3.3V/1500mA	3000VDC (DIP)				
URF4805P-6WR3			5V/1200mA						
URF4812P-6WR3			12V/500mA						
URF4815P-6WR3			15V/400mA						
URF4824P-6WR3			24V/250mA						

Product Program 4:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
*URB2403S-6WR3	6W	9-36 (24VDC)	3.3V/1350mA	1600VDC (SIP)	
*URB2405S-6WR3			5V/1200mA		
*URB2409S-6WR3			9V/667mA		
*URB2412S-6WR3			12V/500mA		
*URB2415S-6WR3			15V/400mA		
*URB2424S-6WR3			24V/250mA		

## Package Dimension

URA/B\_YMD-6WR3 Series LxWxH: 25.40x25.40x11.70(mm)

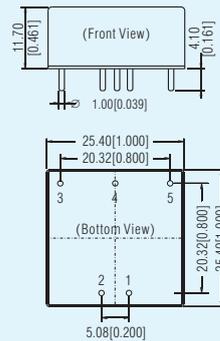

### Pin-Out


Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	No Pin	OV
5	OV	-Vo

Unit: mm[inch]

Pin diameter tolerance: ±0.10[±0.004]

General tolerance: ±0.50[±0.020]

URB-S-6WR3 Series LxWxH: 22.00x9.50x12.00(mm)

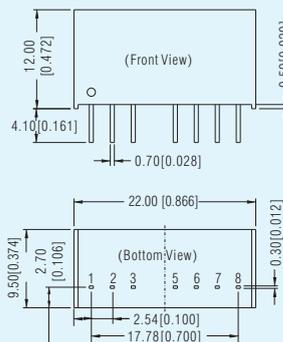

### Pin-Out

Pin	Function
1	GND
2	Vin
3	Ctrl
5	NC
6	+Vo
7	OV
8	NC

NC: No connection.

Unit: mm[inch]

Pin diameter tolerance: ±0.10[±0.004]

General tolerance: ±0.50[±0.020]


Note: 1. Series with suffix 'P' are standard DIP24 packaged with plastic casing, with suffix 'ZP' are standard DIP24 packaged with aluminum alloy casing, with suffix 'YMD' are 1\*1 packaged with aluminum alloy casing. And detailed dimension please refer to illustration;

2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.

3. Products marked with "\*" feature -40°C to +105°C operating temperature

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

URA/B\_ZP-6WR3, URE/F\_P-6WR3 Series

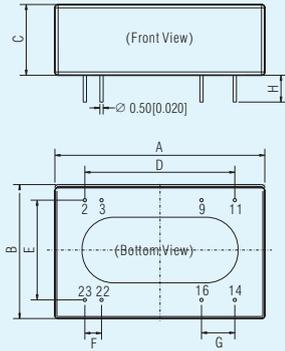

Pin-Out

Pin	URA/B_ZP-6WR3	
	Single	Dual
2,3	GND	GND
9	No Pin	0V
11	NC	-Vo
14	+Vo	+Vo
16	0V	0V
22,23	Vin	Vin

NC: No connection.  
 Unit: mm[inch]  
 Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$   
 General tolerance:  $\pm 0.50 [\pm 0.020]$

Outline & Dimensions

NO.	URA/B_ZP-6WR3	URE/F_P-6WR3
A	32.00	31.60
B	20.00	20.30
C	10.80	10.20
D	22.86	22.86
E	15.24	15.24
F	2.54	2.54
G	5.08	5.08
H	4.10	4.10

Pin-Out

Pin	URE_P-6WR3		URF_P-6WR3	
	Function	Function	Function	Function
2,3	GND	GND	GND	GND
9	0V	No Pin	0V	No Pin
11	-Vo	NC	-Vo	NC
14	+Vo	+Vo	+Vo	+Vo
16	0V	0V	0V	0V
22,23	Vin	Vin	Vin	Vin

# DC/DC Converter Specialized for Super-capacitor and Lithium Battery-powered RoHS

Features

- Suitable for super-capacitor and lithium battery-powered applications
- Constant voltage & current output
- Adjustable output voltage
- Internal SMD construction
- Remote ON/OFF
- Output short-circuit protections




Product Program

Series	Input Voltage (VDC) Nominal (Range)	Output		Effi(%) (typ)	Certification
		Output Voltage (VDC)	Constant Current (mA)		
URF2428LP-700 series	9-36 (24VDC)	0-28.5	700	88	RoHS
URB24A5YMD-1000 series	9-36 (24VDC)	0-4.8	1000	78	

Note: Special input, output and package customization is acceptable.

封装尺寸

URB24A5YMD-1000 Series LxWxH: 25.40x25.40x11.70(mm)

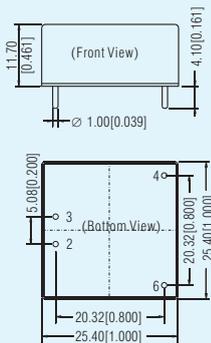


Pin-Out

Pin	Function
2	GND
3	Vin
4	+Vo
6	0V

Unit: mm[inch]  
 Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$   
 General tolerance:  $\pm 0.50 [\pm 0.020]$

URF2428LP-700 Series LxWxH: 51.50x26.50x12.00(mm)

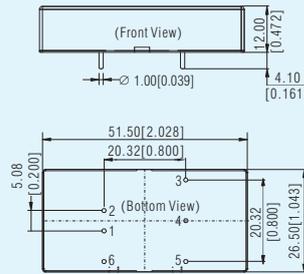

Pin-Out

Pin	Function
1	GND
2	Vin
3	+Vo
4	Trim
5	0V
6	Ctrl

Unit: mm[inch]  
 Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$   
 General tolerance:  $\pm 0.50 [\pm 0.020]$

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# 10W 2:1/4:1 Wide Input Voltage, Isolated & Regulated Output Series

UL US CE CB RoHS

## Features

- Suitable for industrial control, electric power, instrumentation and communication applications
- Operating temperature: -40°C to +85°C / -40°C to +105°C
- Standby power consumption as low as 0.11W
- International standard pin-out
- Meet CISPR22/EN55022 CLASS A
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- IEC/UL/EN60950 approval



A2S Chassis Mounting

A4S DIN-Rail Mounting

## Product Program 4:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
URA2405YMD-10WR3	10W	9-36 (24VDC)	±5V/±1000mA	1500VDC (DIP)	UL US CB RoHS				
URA2409YMD-10WR3			±9V/±555mA						
URA2412YMD-10WR3			±12V/±416mA						
URA2415YMD-10WR3			±15V/±333mA						
URA2424YMD-10WR3			±24V/±208mA						
URB2403YMD-10WR3			3.3V/2400mA						
URB2405YMD-10WR3			5V/2000mA						
URB2409YMD-10WR3			9V/1111mA						
URB2412YMD-10WR3			12V/833mA						
URB2415YMD-10WR3			15V/667mA						
URB2424YMD-10WR3	24V/416mA								
URA4805YMD-10WR3	10W	18-75 (48VDC)	±5V/±1000mA	1500VDC (DIP)	UL US CB RoHS				
URA4812YMD-10WR3			±12V/±416mA						
URA4815YMD-10WR3			±15V/±333mA						
URA4824YMD-10WR3			±24V/±208mA						
URB4803YMD-10WR3			3.3V/2400mA						
URB4805YMD-10WR3			5V/2000mA						
URB4812YMD-10WR3			12V/833mA						
URB4815YMD-10WR3			15V/667mA						
URB4824YMD-10WR3			24V/416mA						
URE2405LP-10WR3			10W			9-36 (24VDC)	±5V/±1000mA	3000VDC (DIP)	UL US CB RoHS
URE2412LP-10WR3	±12V/±416mA								
URE2415LP-10WR3	±15V/±333mA								
URF2403LP-10WR3	3.3V/2400mA								
URF2405LP-10WR3	5V/2000mA								
URF2409LP-10WR3	9V/1111mA								
URF2412LP-10WR3	12V/833mA								
URF2415LP-10WR3	15V/667mA								
URF2424LP-10WR3	24V/416mA								
URE4805LP-10WR3	10W	18-75 (48VDC)		±5V/±1000mA	3000VDC (DIP)		UL US CB RoHS		
URE4812LP-10WR3			±12V/±416mA						
URE4815LP-10WR3			±15V/±333mA						
URF4803LP-10WR3			3.3V/2400mA						
URF4805LP-10WR3			5V/2000mA						
URF4812LP-10WR3			12V/833mA						
URF4815LP-10WR3			15V/667mA						
URF4824LP-10WR3			24V/416mA						
URA2405ZP-10WR3			10W	9-36 (24VDC)		±5V/±1000mA		1500VDC (DIP)	RoHS
URA2412ZP-10WR3						±12V/±416mA			
URA2415ZP-10WR3	±15V/±333mA								
URB2412ZP-10WR3	12V/833mA								
URB2415ZP-10WR3	15V/667mA								
URB2424ZP-10WR3	24V/416mA								
URA4805ZP-10WR3	10W	18-75 (48VDC)			±5V/±1000mA	1500VDC (DIP)	RoHS		
URA4812ZP-10WR3					±12V/±416mA				
URA4815ZP-10WR3					±15V/±333mA				
URB4812ZP-10WR3					12V/833mA				
URB4815ZP-10WR3			15V/667mA						
URB4824ZP-10WR3			24V/416mA						
*URB2403S-10WR3			10W	9-36 (24VDC)	3.3V/2400mA			1500VDC (SIP)	RoHS
*URB2405S-10WR3					5V/2000mA				
*URB2409S-10WR3					9V/1111mA				
*URB2412S-10WR3					12V/833mA				
*URB2415S-10WR3	15V/667mA								
*URB2424S-10WR3	24V/417mA								
*URB2403S-10WR3	10W	18-36 (24VDC)			3.3V/2400mA	1500VDC (SIP)	RoHS		
*URB2405S-10WR3					5V/2000mA				
*URB2409S-10WR3					9V/1111mA				
*URB2412S-10WR3					12V/833mA				
*URB2415S-10WR3			15V/667mA						
*URB2424S-10WR3			24V/417mA						

## Product Program 2:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
VRB1205YMD-10WR3	10W	9-18 (12VDC)	5V/2000mA	1500VDC (DIP)	RoHS				
VRB2405YMD-10WR3			5V/2000mA						
VRB2412YMD-10WR3			12V/833mA						
VRB2415YMD-10WR3			15V/667mA						
VRB2424YMD-10WR3			24V/416mA						
VRB4803YMD-10WR3			3.3V/2400mA						
VRB4805YMD-10WR3			5V/2000mA						
VRB4812YMD-10WR3			12V/833mA						
VRB4815YMD-10WR3			15V/667mA						
VRB4824YMD-10WR3			24V/416mA						
VRA1205ZP-10WR3	10W	9-18 (12VDC)	±5V/±1000mA	1500VDC (DIP)	RoHS				
VRA1212ZP-10WR3			±12V/±416mA						
VRA1215ZP-10WR3			±15V/±333mA						
VRB1212ZP-10WR3			12V/833mA						
VRB1215ZP-10WR3			15V/667mA						
VRB1224ZP-10WR3			24V/416mA						
VRA2405ZP-10WR3			10W			18-36 (24VDC)	±5V/±1000mA	1500VDC (DIP)	RoHS
VRA2412ZP-10WR3							±12V/±416mA		
VRA2415ZP-10WR3							±15V/±333mA		
VRB2412ZP-10WR3							12V/833mA		
VRB2415ZP-10WR3	15V/667mA								
VRB2424ZP-10WR3	24V/416mA								
VRA4805ZP-10WR3	10W	36-75 (48VDC)		±5V/±1000mA	1500VDC (DIP)		RoHS		
VRA4812ZP-10WR3				±12V/±416mA					
VRA4815ZP-10WR3				±15V/±333mA					
VRB4812ZP-10WR3				12V/833mA					
VRB4815ZP-10WR3			15V/667mA						
VRB4824ZP-10WR3			24V/416mA						
*VRB1203S-10WR3			10W	9-18 (12VDC)		3.3V/2400mA		1500VDC (SIP)	RoHS
*VRB1205S-10WR3						5V/2000mA			
*VRB1209S-10WR3						9V/1111mA			
*VRB1212S-10WR3						12V/833mA			
*VRB1215S-10WR3	15V/667mA								
*VRB1224S-10WR3	24V/417mA								
*VRB2403S-10WR3	10W	18-36 (24VDC)			3.3V/2400mA	1500VDC (SIP)	RoHS		
*VRB2405S-10WR3					5V/2000mA				
*VRB2409S-10WR3					9V/1111mA				
*VRB2412S-10WR3					12V/833mA				
*VRB2415S-10WR3			15V/667mA						
*VRB2424S-10WR3			24V/417mA						

- Note: 1. Chassis mounting and DIN-Rail mounting are available and please contact our sales department or refer to datasheet for details. Series have input reverse voltage protection;
2. Series with suffix "LP" are 2" x 1" packaged with plastic casing, with suffix "YMD" are 1" x 1" packaged with aluminum alloy casing. And detailed dimension please refer to illustration;
3. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.
4. Products marked with "\*" feature -40°C to +105°C operating temperature.


• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

DC/DC Converter

### Package Dimension

#### VRA/B\_ZP-10WR3 & URA/B\_ZP-10WR3 Series

LxWxH: 32.00x20.00x10.80(mm)

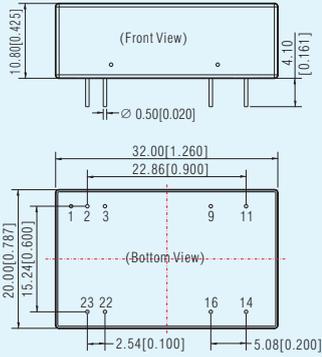

#### Pin-Out

Pin	Single	Dual
1	Ctrl	Ctrl
2,3	GND	GND
9	No Pin	OV
11	NC	-Vo
14	+Vo	+Vo
16	OV	OV
22,23	Vin	Vin


NC: No connection.

Unit: mm[inch]

Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$

General tolerance:  $\pm 0.50 [\pm 0.020]$

#### VRB-S-10WR3, URB-S-10WR3 Series LxWxH: 22.00x9.50x12.00(mm)

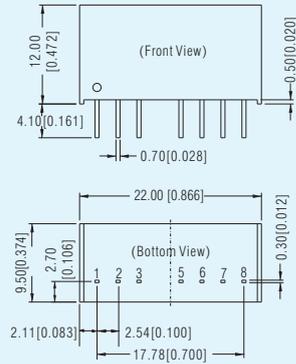

#### Pin-Out

Pin	Function
1	GND
2	Vin
3	Ctrl
5	NC
6	+Vo
7	OV
8	NC

NC: No connection.


Unit: mm[inch]

Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$

General tolerance:  $\pm 0.50 [\pm 0.020]$

#### URA/B\_YMD-10WR3, VRB\_YMD-10WR3 Series

LxWxH: 25.40x25.40x11.70(mm)

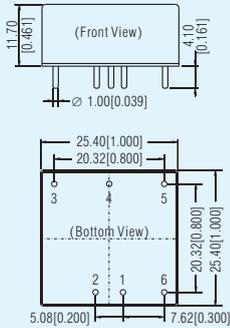

#### Pin-Out


Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	No Pin	OV
5	OV	-Vo
6	Ctrl	Ctrl

Unit: mm[inch]

Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$

General tolerance:  $\pm 0.50 [\pm 0.020]$

#### URE/F\_LP-10WR3 Series LxWxH: 51.50x26.50x12.00(mm)

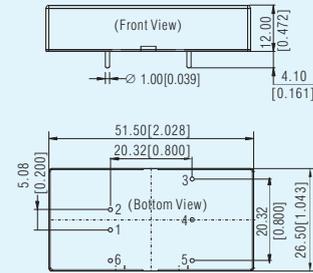

#### Pin-Out

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	No Pin	OV
5	OV	-Vo
6	Ctrl	Ctrl

Unit: mm[inch]

Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$

General tolerance:  $\pm 0.50 [\pm 0.020]$

# 10W Ultra-thin Wide Input Voltage, Isolated&Regulated SMD/DIP DC/DC Converter

RoHS

## Features

- 4:1 wide input voltage range
- Efficiency up to 88%
- Standby power consumption as low as 0.096W
- Isolation: 500VAC / 1500VDC
- Operating temperature: -40°C to +85°C
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- DIP/SMD package available



Product Program 4:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
URB2405J(M)D/T-10W	10W	9-36 (24VDC)	5V/2000mA	1500VDC (DIP/SMD)	RoHS
URB2412J(M)D/T-10W			12V/833mA		
URB2415J(M)D/T-10W			15V/667mA		


Note :

1. URBxxxxJ(M)D/T-10W includes 4 types: VRB\_JD-6W(DIP package without shell), URBxxxxJMD-10W(DIP package with shell), URBxxxxJT-10W(SMD package without shell) and URBxxxxJMT-10W(SMD package with shell)
2. Once input voltage exceeds the limit, it may cause irreversible damage
3. The above efficiency value is tested in the case of nominal input voltage and rated output load


## Package Dimension

### URB\_JD-10W (Open frame, DIP package)

LxWxH: 39.20x20.80x6.10(mm)

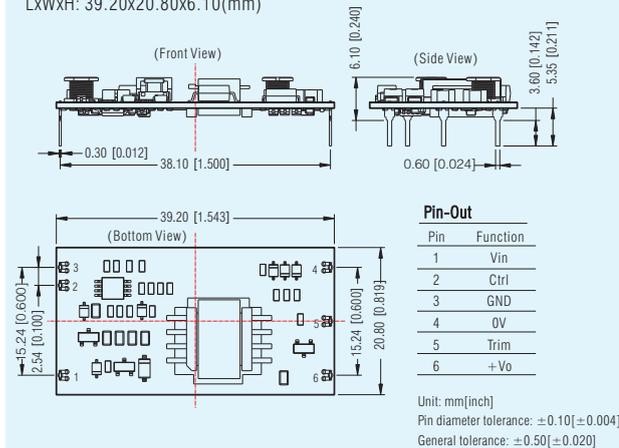


### URB\_JMD-10W (DIP package with shell) LxWxH: 40.20x22.00x6.80(mm)

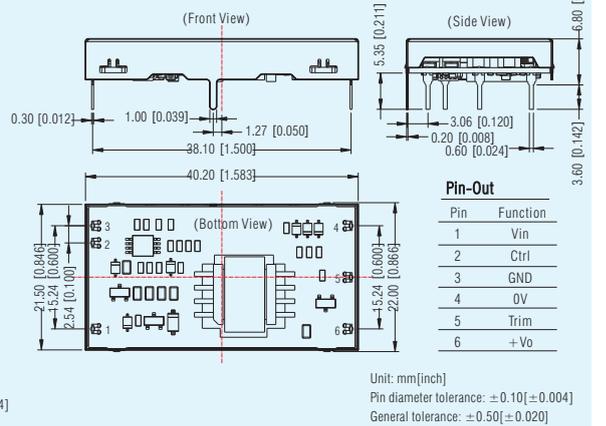


### URB\_JT-10W (Open frame, SMD package)

LxWxH: 41.40x20.80x6.30(mm)

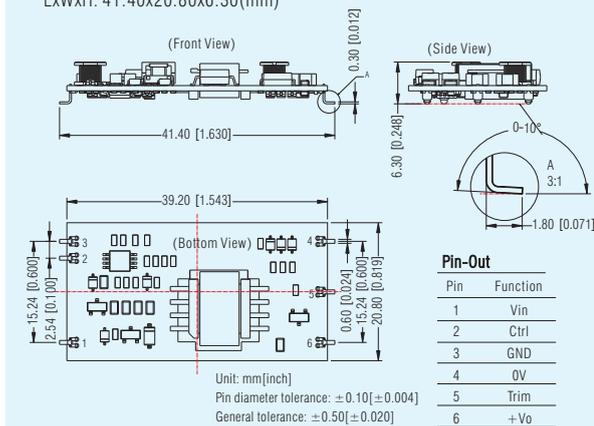

### URB\_JMT-10W (SMD package with shell) LxWxH: 41.40x22.00x7.00(mm)

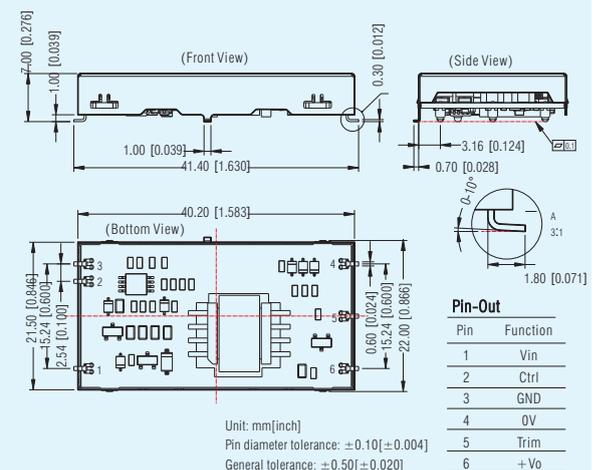

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

# 15-20W 2:1/4:1 Wide Input Voltage, Isolated & Regulated Output Series

## Features

- Suitable for DCS, battery-powered device, communication, distributed power system, D/A hybrid system, RTU and industrial robot system applications
- Operating temperature: -40°C to +85°C / -40°C to +105°C
- Standby power consumption as low as 0.15W
- International standard pin-out
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- IEC/EN/UL60950 approval, UL/EN62368 approval (pending)




“H” Horizontal package with heat sink

A2S Chassis Mounting

A4S DIN-Rail Mounting

Product Program 4:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
URA2405LD-20WR3	20W	9-36 (24VDC)	±5V/±2000mA	1500VDC (DIP)	
URA2409LD-20WR3			±9V/±1111mA		
URA2412LD-20WR3			±12V/±834mA		
URA2415LD-20WR3			±15V/±667mA		
URB2403LD-20WR3			3.3V/5000mA		
URB2405LD-20WR3			5V/4000mA		
URB2409LD-20WR3			9V/2222mA		
URB2412LD-20WR3			12V/1667mA		
URB2415LD-20WR3			15V/1333mA		
URB2424LD-20WR3			24V/834mA		
URA4805LD-20WR3	20W	18-75 (48VDC)	±5V/±2000mA	1500VDC (DIP)	
URA4812LD-20WR3			±12V/±834mA		
URA4815LD-20WR3			±15V/±667mA		
URB4803LD-20WR3			3.3V/5000mA		
URB4805LD-20WR3			5V/4000mA		
URB4809LD-20WR3			9V/2222mA		
URB4812LD-20WR3			12V/1667mA		
URB4815LD-20WR3			15V/1333mA		
URB4824LD-20WR3			24V/834mA		
URF2403LP-20WR3			20W		
URF2405LP-20WR3	5V/4000mA				
URF2409LP-20WR3	9V/2222mA				
URF2412LP-20WR3	12V/1667mA				
URF2415LP-20WR3	15V/1333mA				
URF2424LP-20WR3	24V/833mA				
URF4803LP-20WR3	3.3V/5000mA				
URF4805LP-20WR3	5V/4000mA				
URF4812LP-20WR3	12V/1667mA				
URF4815LP-20WR3	15V/1333mA				
URF4824LP-20WR3	24V/833mA				
*URA2405YMD-15WR3	15W	9-36 (24VDC)	±5V/±1500mA	1500VDC (DIP)	
*URA2412YMD-15WR3			±12V/±625mA		
*URA2415YMD-15WR3			±15V/±500mA		
*URA2424YMD-15WR3			±24V/±312mA		
*URA4805YMD-15WR3			±5V/±1500mA		
*URA4812YMD-15WR3		±12V/±625mA			
*URA4815YMD-15WR3		±15V/±500mA			
*URA4824YMD-15WR3		±24V/±312mA			
*URB2403YMD-15WR3		18-75 (48VDC)	3.3V/4000mA		
*URB2405YMD-15WR3			5V/3000mA		
*URB2412YMD-15WR3	12V/1250mA				
*URB2415YMD-15WR3	15V/1000mA				
*URB2424YMD-15WR3	24V/625mA				
*URB4803YMD-15WR3	15W	9-36 (24VDC)	3.3V/4000mA	1500VDC (DIP)	
*URB4805YMD-15WR3			5V/3000mA		
*URB4812YMD-15WR3			12V/1250mA		
*URB4815YMD-15WR3			15V/1000mA		
*URB4824YMD-15WR3			24V/625mA		
*URB4803YMD-15WR3		18-75 (48VDC)	3.3V/4000mA		
*URB4805YMD-15WR3			5V/3000mA		
*URB4812YMD-15WR3			12V/1250mA		
*URB4815YMD-15WR3			15V/1000mA		
*URB4824YMD-15WR3			24V/625mA		

Product Program 4:1 Input series					
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
*URB2403YMD-20WR3	20W	9-36 (24VDC)	3.3V/5000mA	1500VDC (DIP)	
*URB2405YMD-20WR3			5V/4000mA		
*URB2412YMD-20WR3			12V/1667mA		
*URB2415YMD-20WR3			15V/1334mA		
*URB2424YMD-20WR3			24V/833mA		
*URB4803YMD-20WR3		18-75 (48VDC)	3.3V/5000mA		
*URB4805YMD-20WR3			5V/4000mA		
*URB4812YMD-20WR3			12V/1667mA		
*URB4815YMD-20WR3			15V/1334mA		
*URB4824YMD-20WR3			24V/833mA		
*URA2405YMD-20WR3	20W	9-36 (24VDC)	±5V/±2000mA	1500VDC (DIP)	
*URA2412YMD-20WR3			±12V/±833mA		
*URA2415YMD-20WR3			±15V/±667mA		
*URA2424YMD-20WR3			±24V/±417mA		
*URA4805YMD-20WR3			±5V/±2000mA		
*URA4812YMD-20WR3		±12V/±833mA			
*URA4815YMD-20WR3		±15V/±667mA			
*URA4824YMD-20WR3		±24V/±417mA			

Product Program 2:1 Input series									
Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification				
VRB2405LD-15WR3	15W	18-36 (24VDC)	5V/3000mA	1500VDC (DIP)					
VRB2412LD-15WR3			12V/1250mA						
VRB2415LD-15WR3			15V/1000mA						
VRB2424LD-15WR3			24V/625mA						
VRB4805LD-15WR3			5V/3000mA						
VRB4812LD-15WR3		36-75 (48VDC)	12V/1250mA						
VRB4815LD-15WR3			15V/1000mA						
VRB4824LD-15WR3			24V/625mA						
VRB2405LD-20WR3			20W			18-36 (24VDC)	±5V/±2000mA	1500VDC (DIP)	
VRB2412LD-20WR3							±12V/±834mA		
VRB2415LD-20WR3	±15V/±667mA								
VRB2403LD-20WR3	3.3V/5000mA								
VRB2405LD-20WR3	5V/4000mA								
VRB2409LD-20WR3	36-75 (48VDC)	9V/2222mA							
VRB2412LD-20WR3		12V/1667mA							
VRB2415LD-20WR3		15V/1333mA							
VRB2424LD-20WR3		24V/834mA							
VRB4805LD-20WR3		20W		9-36 (24VDC)	±5V/±2000mA	1500VDC (DIP)			
VRB4812LD-20WR3	±12V/±834mA								
VRB4815LD-20WR3	±15V/±667mA								
VRB4803LD-20WR3	3.3V/5000mA								
VRB4805LD-20WR3	5V/4000mA								
VRB4809LD-20WR3	36-75 (48VDC)		9V/2222mA						
VRB4812LD-20WR3			12V/1667mA						
VRB4815LD-20WR3			15V/1333mA						
VRB4824LD-20WR3			24V/834mA						

• This catalog is used to introduce our latest products, for more information, please contact our sales department


## Product Program 2:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
*VRB1203YMD-15WR3	15W	9-18 (12VDC)	3.3V/4000mA	1500VDC (DIP)	 ( Pending ) 
*VRB1205YMD-15WR3			5V/3000mA		
*VRB1212YMD-15WR3			12V/1250mA		
*VRB1215YMD-15WR3			15V/1000mA		
*VRB1224YMD-15WR3			24V/625mA		
*VRB2403YMD-15WR3			3.3V/4000mA		
*VRB2405YMD-15WR3		5V/3000mA			
*VRB2412YMD-15WR3		12V/1250mA			
*VRB2415YMD-15WR3		15V/1000mA			
*VRB2424YMD-15WR3		24V/625mA			
*VRB4803YMD-15WR3		3.3V/4000mA			
*VRB4805YMD-15WR3		5V/3000mA			
*VRB4812YMD-15WR3	12V/1250mA				
*VRB4815YMD-15WR3	15V/1000mA				
*VRB4824YMD-15WR3	24V/625mA				
*VRB1203YMD-20WR3	20W	9-18 (12VDC)	3.3V/5000mA	1500VDC (DIP)	 ( Pending ) 
*VRB1205YMD-20WR3			5V/4000mA		
*VRB1212YMD-20WR3			12V/1667mA		
*VRB1215YMD-20WR3			15V/1333mA		
*VRB1224YMD-20WR3			24V/833mA		
*VRB2403YMD-20WR3			3.3V/5000mA		
*VRB2405YMD-20WR3		5V/4000mA			
*VRB2412YMD-20WR3		12V/1667mA			
*VRB2415YMD-20WR3		15V/1333mA			
*VRB2424YMD-20WR3		24V/833mA			
*VRB4803YMD-20WR3		3.3V/5000mA			
*VRB4805YMD-20WR3		5V/4000mA			
*VRB4812YMD-20WR3	12V/1667mA				
*VRB4815YMD-20WR3	15V/1333mA				
*VRB4824YMD-20WR3	24V/833mA				

- Note: 1. Chassis mounting and DIN-Rail mounting are available and please contact our sales department or refer to datasheet for details. Series have input reverse voltage protection;  
 2. Series with suffix "LD" are 2\*1 packaged with aluminum alloy casing, with suffix "LP" are 2\*x1" packaged with plastic casing. And detailed dimension please refer to illustration;  
 3. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.  
 4. Products marked with "\*" feature -40°C to +105°C operating temperature

## VRB-YMD-15WR3, URB-YMD-15WR3, VRB-YMD-20WR3, URB-YMD-20WR3 Series



LxWxH: 25.40x25.40x11.70(mm)

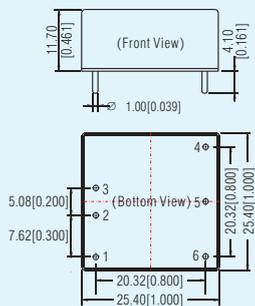

**Pin-Out**


Pin	Function
1	Ctrl
2	GND
3	Vin
4	+Vo
5	Trim
6	0V

Unit: mm[inch]  
 Pin diameter tolerance: ±0.10 [±0.004]  
 General tolerance: ±0.50 [±0.020]

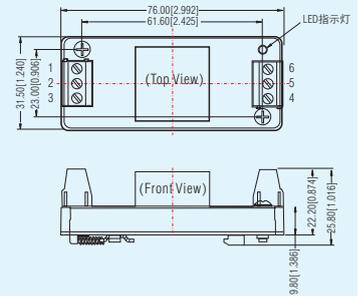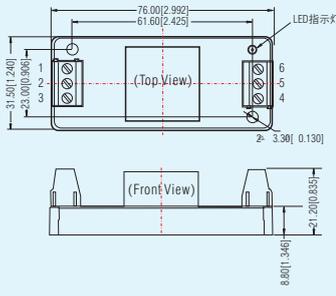

## URA-YMD-15WR3, URA-YMD-20WR3 Series



LxWxH: 25.40x25.40x11.70(mm)

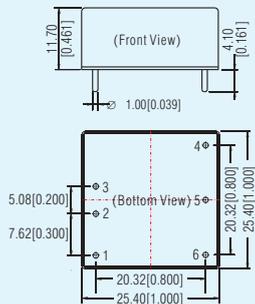

**Pin-Out**

Pin	Dual
1	Ctrl
2	GND
3	Vin
4	+Vo
5	0V
6	-Vo


Unit: mm[inch]  
 Pin diameter tolerance: ±0.10 [±0.004]  
 General tolerance: ±0.50 [±0.020]

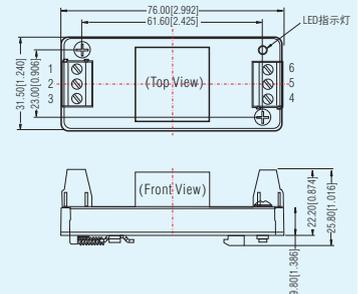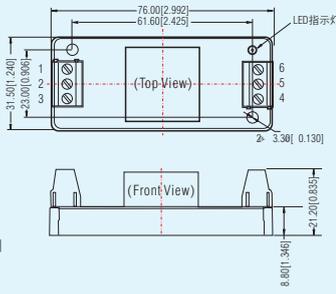

## Package Dimension

### VRB\_LD-15WR3, VRA/B\_LD-20WR3, URA/B\_LD-20WR3 Series

LxWxH: 50.80x25.40x11.80(mm)

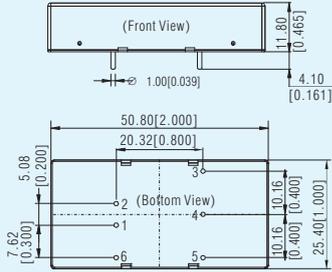


#### Pin-Out

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	Trim	0V
5	0V	-Vo
6	Ctrl	Ctrl

Unit: mm[inch]  
 Pin diameter tolerance: ±0.10 [±0.004]  
 General tolerance: ±0.50 [±0.020]

### URF\_LP-20WR3 Series

LxWxH: 51.50x26.50x12.00(mm)

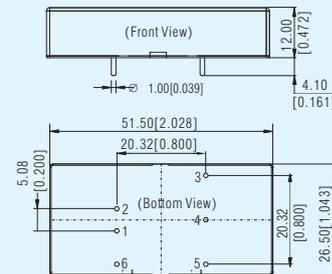

#### Pin-Out

Pin	Function
1	GND
2	Vin
3	+Vo
4	Trim
5	0V
6	Ctrl

Unit: mm[inch]  
 Pin diameter tolerance: ±0.10 [±0.004]  
 General tolerance: ±0.50 [±0.020]

# 30-50W 2:1/4:1 Wide Input Voltage, 1500VDC Isolated & Regulated Output Series

UL US CE CB RoHS

## Features

- Suitable for DCS, battery-powered device, communication, distributed power system, D/A hybrid system, RTU and industrial robot system applications
- Operating temperature: -40°C to +80°C
- Standby power consumption as low as 0.14W
- International standard pin-out
- Meet CISPR22/EN55022 CLASS A
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- IEC/EN/UL60950, EN62368 approval



“H”Horizontal package with heat sink



A2S Chassis Mounting

A4S DIN-Rail Mounting

DC/DC Converter

## Product Program 2:1 Input series

Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification
VRB2403LD-30WR3	30W	18-36 (24VDC)	3.3V/6000mA	1500VDC (DIP)	CE RoHS
VRB2405LD-30WR3			5V/6000mA		
VRB2409LD-30WR3			9V/3333mA		
VRB2412LD-30WR3			12V/2500mA		
VRB2415LD-30WR3			15V/2000mA		
VRB2424LD-30WR3			24V/1250mA		
VRB4803LD-30WR3	30W	36-75 (48VDC)	3.3V/6000mA	1500VDC (DIP)	CE RoHS
VRB4805LD-30WR3			5V/6000mA		
VRB4812LD-30WR3			12V/2500mA		
VRB4815LD-30WR3			15V/2000mA		
VRB4824LD-30WR3			24V/1250mA		
VRB2412LD-40WHR3			40W		
VRB2415LD-40WHR3	15V/2667mA				
VRB2424LD-40WHR3	24V/1667mA				
VRB4812LD-40WHR3	12V/3333mA				
VRB4815LD-40WHR3	15V/2667mA				
VRB4824LD-40WHR3	24V/1667mA				
VRB2403LD-50W	50W	18-36 (24VDC)	3.3V/10000mA	1500VDC (DIP)	CE RoHS
VRB2405LD-50W			5V/10000mA		
VRB2412LD-50W			12V/4167mA		
VRB2415LD-50W			15V/3333mA		
VRB2424LD-50W			24V/2083mA		
VRB4803LD-50W			50W		
VRB4805LD-50W	5V/10000mA				
VRB4812LD-50W	12V/4167mA				
VRB4815LD-50W	15V/3333mA				
VRB4824LD-50W	24V/2083mA				

## Product Program 4:1 Input series


Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation (Package)	Certification		
URA2405LD-30WR3	30W	9-36 (24VDC)	±5V/±3000mA	1500VDC (DIP)	CE RoHS		
URA2412LD-30WR3			±12V/±1250mA				
URA2415LD-30WR3			±15V/±1000mA				
URA2424LD-30WR3			±24V/±625mA				
URB2403LD-30WR3			3.3V/6000mA			1500VDC (DIP)	UL US CB RoHS
URB2405LD-30WR3			5V/6000mA				
URB2409LD-30WR3	9V/3333mA						
URB2412LD-30WR3	12V/2500mA						
URB2415LD-30WR3	15V/2000mA						
URB2424LD-30WR3	24V/1250mA						
URA4805LD-30WR3	30W	18-75 (48VDC)	±5V/±3000mA	1500VDC (DIP)	RoHS CE		
URA4812LD-30WR3			±12V/±1250mA				
URA4815LD-30WR3			±15V/±1000mA				
URB4803LD-30WR3			3.3V/6000mA			1500VDC (DIP)	UL US CB CE RoHS
URB4805LD-30WR3			5V/6000mA				
URB4812LD-30WR3			12V/2500mA				
URB4815LD-30WR3	15V/2000mA						
URB4824LD-30WR3	24V/1250mA						

Note: 1. Chassis mounting and DIN-Rail mounting are available and please contact our sales department or refer to datasheet for details. Series have input reverse voltage protection;  
 2. Series with suffix "LD" are 2\*1 packaged with aluminum alloy casing, and detail dimension please refer to illustration;  
 3. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-B02D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.

## Package Dimension

Package with no heat sink (URA\_LD-30WR3, URB\_LD-30WR3, VRB\_LD-30WR3, VRB\_LD-40WHR3, VRB\_LD-50W Series)

LxWxH: 50.80x25.40x1.80(mm)

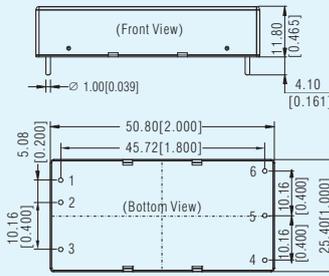


Pin	Pin-Out	
	Single	Dual
1	Vin	Vin
2	GND	GND
3	Ctrl	Ctrl
4	Trim	-Vo
5	0V	0V
6	+Vo	+Vo

Unit: mm[inch]  
 Pin diameter tolerance: ±0.10[±0.004]  
 General tolerance: ±0.50[±0.020]

Package with heat sink (URA\_LD-30WR3, URB\_LD-30WR3, VRB\_LD-30WR3, VRB\_LD-40WHR3, VRB\_LD-50W Series)

LxWxH: 51.40x26.20x16.50(mm)

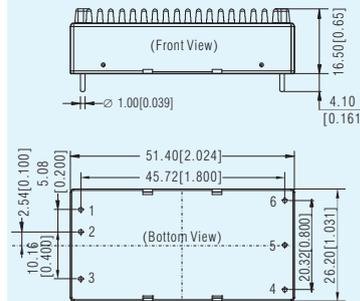

Pin	Pin-Out	
	Single	Dual
1	Vin	Vin
2	GND	GND
3	Ctrl	Ctrl
4	Trim	-Vo
5	0V	0V
6	+Vo	+Vo

Unit: mm[inch]  
 General tolerance: ±0.50[±0.020]

# 75-200W 4:1 Wide Input Voltage, 2250VDC Isolated & Regulated URF\_QB-R3

RoHS

## Features

- 4:1 wide input voltage range
- Efficiency up to 93%
- Isolation: 2250VDC
- Input under-voltage, output over-voltage, over short-circuit, over-temperature and over-current protections
- Operating temperature: -40°C to +85°C
- Metal mask, international standard package




## Product Program

Series	power	Input Voltage (VDC)	Output Voltage/current (Vo/Io)	Isolation voltage	Certification
URF4805QB-75WR3	75W	18-75(48VDC)	5V/15000mA	2250VDC	RoHS
URF4812QB-75WR3			12V/6250mA		
URF4815QB-75WR3			15V/5000mA		
URF4824QB-75WR3			24V/3125mA		
URF4848QB-75WR3			48V/1563mA		
URF2405QB-100WR3	100W	9-36(24VDC)	5V/20000mA	2250VDC	RoHS
URF2412QB-100WR3			12V/8300mA		
URF2415QB-100WR3			15V/6700mA		
URF2424QB-100WR3			24V/4200mA		
URF2428QB-100WR3			28V/3600mA		
URF2448QB-100WR3	48V/2100mA				
URF4805QB-100WR3	100W	18-75(48VDC)	5V/20000mA	2250VDC	RoHS
URF4812QB-100WR3			12V/8300mA		
URF4815QB-100WR3			15V/6700mA		
URF4824QB-100WR3			24V/4200mA		
URF4848QB-100WR3			48V/2100mA		
URF4805QB-150WR3	150W	18-75(48VDC)	5V/30000mA	2250VDC	RoHS
URF4812QB-150WR3			12V/12500mA		
URF4815QB-150WR3			15V/10000mA		
URF4824QB-150WR3			24V/6250mA		
URF4848QB-150WR3			48V/3130mA		
URF4805QB-200WR3	200W	18-75(48VDC)	5V/40000mA	2250VDC	RoHS
URF4812QB-200WR3			12V/16700mA		
URF4815QB-200WR3			15V/13300mA		
URF4824QB-200WR3			24V/8400mA		
URF4848QB-200WR3			48V/4200mA		


Note : series with suffix "F" are packaged with aluminum alloy casing, with suffix "H" are packaged with heat sink

## Package Dimension


With chassis LxWxH: 62.00x56x14.60(mm)

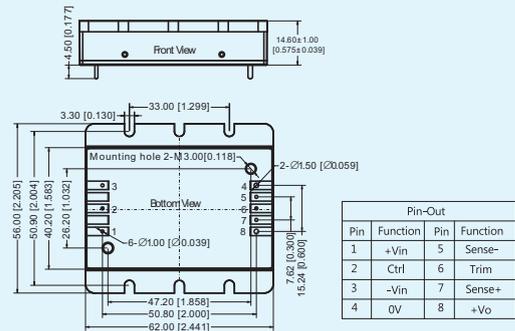

With no chassis and heat sink LxWxH: 61.80x40.20x12.70(mm)

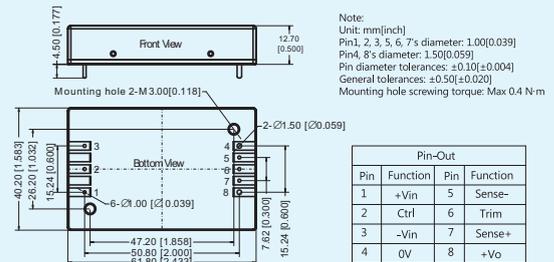

Packaged with heat sink LxWxH: 61.80x40.20x27.7 ± 1.00(mm)

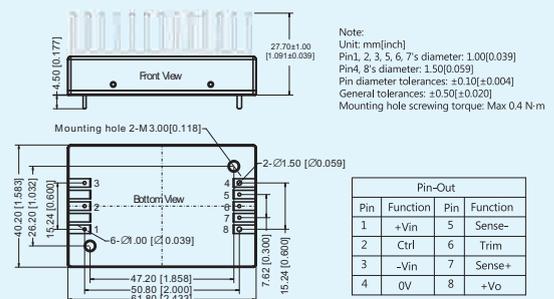

# 6-40W 4:1 Wide Input Voltage, 2250VDC Isolated & Regulated Output Series for Railway

CE RoHS

## Features

- Suitable for railway application
- Wide input voltage range: 40-160VDC
- Operating temperature: -40°C to +85°C
- Isolation: 2250VDC/3000VDC
- International standard brick package
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- Meet railway standard EN50155



DC/DC Converter

## Product Program


Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation	Certification
URA1D05YMD-6WR3	6W	40-160 (110VDC)	±5V/±600mA	2250VDC	RoHS
URA1D12YMD-6WR3			±12V/±250mA		
URA1D15YMD-6WR3			±15V/±200mA		
URB1D05YMD-6WR3			5V/1200mA		CE RoHS
URB1D12YMD-6WR3			12V/500mA		
URB1D15YMD-6WR3			15V/400mA		
URB1D24YMD-6WR3	24V/250mA				
URB1D03LMD-10WR3	10W	40-160 (110VDC)	3.3V/2400mA	2250VDC	RoHS
URB1D05LMD-10WR3			5V/2000mA		
URB1D12LMD-10WR3			12V/833mA		
URB1D15LMD-10WR3			15V/667mA		CE (pending)
URB1D24LMD-10WR3			24V/417mA		
URB1D03LMD-15WR3			3.3V/4000mA		
URB1D05LMD-15WR3	5V/3000mA	2250VDC	CE RoHS		
URB1D12LMD-15WR3	12V/1250mA				
URB1D15LMD-15WR3	15V/1000mA				
URB1D24LMD-15WR3	24V/625mA				
URB1D03LMD-20WR3	3.3V/5000mA		2250VDC	RoHS	
URB1D05LMD-20WR3	5V/4000mA				
URB1D12LMD-20WR3	12V/1667mA				
URB1D15LMD-20WR3	15V/1333mA	CE (pending)			
URB1D24LMD-20WR3	24V/833mA				
URB1D03LD-20WR3	3.3V/5000mA				
URB1D05LD-20WR3	5V/4000mA	2250VDC	RoHS		
URB1D12LD-20WR3	12V/1667mA				
URB1D15LD-20WR3	15V/1333mA				
URB1D24LD-20WR3	24V/833mA		CE (pending)		
URF1D12LD-20WR3	±12V/±833mA				
URF1D15LD-20WR3	±15V/±667mA				
URF1D24LD-20WR3	±24V/±417mA	3000VDC	RoHS		
URF1D03LD-40WR3	3.3V/5000mA				
URF1D05LD-40WR3	5V/4000mA				
URF1D12LD-40WR3	12V/1667mA		3000VDC		
URF1D15LD-40WR3	15V/1333mA				
URF1D24LD-40WR3	24V/833mA				
URF1D48LD-40WR3	48V/833mA				

Note : series with suffix H\* are packaged with heat sink, and detail dimension please.

## Package Dimension

### URA1D\_YMD-6WR3、URB1D\_YMD-6WR3 Series

LxWxH: 25.40x25.40x11.70(mm)

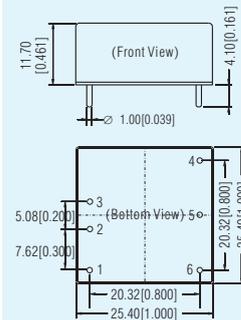


### Pin-Out

Pin	Single	Dual
1	No pin	Ctrl
2	GND	GND
3	Vin	Vin
4	+Vo	+Vo
5	No pin	OV
6	OV	-Vo

Unit: mm[inch]  
Pin diameter tolerance: ±0.10[±0.004]  
General tolerance: ±0.50[±0.020]

### URE1D\_LD-20WR3 Series

LxWxH: 50.80x25.40x11.80(mm)

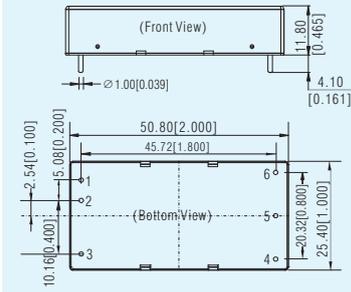


### Pin-Out

Pin	Function
1	Vin
2	GND
3	Ctrl
4	-Vo
5	OV
6	+Vo

Unit: mm[inch]  
Pin diameter tolerance: ±0.10[±0.004]  
General tolerance: ±0.50[±0.020]

### URB1D-LMD-10WR3\URB1D-LMD-15WR3\URB1D-LMD-20WR3

LxWxH: 50.80x25.40x11.80(mm)

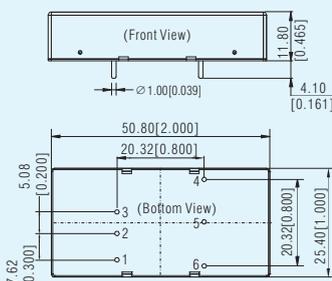


### Pin-Out

Pin	Function
1	Ctrl
2	GND
3	Vin
4	+Vo
5	Trim
6	OV

Unit: mm[inch]  
Pin diameter tolerance: ±0.10[±0.004]  
General tolerance: ±0.50[±0.020]  
Note: URB1D-LMD-10WR3non pin1, 5

### URB1D\_LD-20WR3\URF1D\_LD-40WR3 Series

LxWxH: 50.80x25.40x11.80(mm)

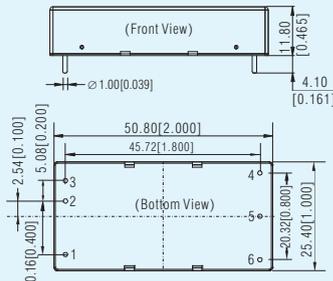

### Pin-Out

Pin	Function
1	Ctrl
2	GND
3	Vin
4	+Vo
5	OV
6	Trim

Unit: mm[inch]  
Pin diameter tolerance: ±0.10[±0.004]  
General tolerance: ±0.50[±0.020]

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# 50-150W Wide Input Voltage, 3000VDC Isolated & Regulated Output Series for Railway

RoHS

## Features

- Suitable for railway application
- Wide input voltage range: 66-160VDC
- Operating temperature: -40°C to +100°C
- Isolation: 3000VDC
- International standard brick package
- Input under-voltage, output over-voltage, over-current and short-circuit protections
- Meet railway standard EN50155

## Product Program


Model Number	Power	Input Voltage (Nominal)	Output Voltage/Current (Vo/Io)	Isolation	Certification
URF1D03QB-50W	50W	66-160 (110VDC)	3.3V/15000mA	3000VDC	RoHS
URF1D05QB-50W			5V/10000mA		
URF1D12QB-50W			12V/4167mA		
URF1D15QB-50W			15V/3333mA		
URF1D24QB-50W			24V/2083mA		
URF1D05QB-75W	75W	66-160 (110VDC)	5V/15000mA	3000VDC	RoHS
URF1D12QB-75W			12V/6250mA		
URF1D15QB-75W			15V/5000mA		
URF1D24QB-75W			24V/3125mA		
URF1D12QB-100W	100W	66-160 (110VDC)	12V/8333mA	3000VDC	RoHS
URF1D15QB-100W			15V/6667mA		
URF1D24QB-100W			24V/4167mA		
URF1D12HB-150W	150W	66-160(110VDC)	12V/12500mA	3000VDC	RoHS
URF1D15HB-150W		50-66	12V/10000mA		
		66-160(110VDC)	15V/10000mA		
		50-66	15V/8000mA		
URF1D24HB-150W	66-160(110VDC)	24V/6250mA	24V/5000mA		

Note: 1. Heat sink is available;

2. If the application requires higher performance for EMC, our matching EMC auxiliary devices such as FC-AX3D, FC-802D, FI-B03D and FT-BX1D are available. For more information, please contact our sales department.


## URF1DxxQB Series Package Dimension

Without heat sink LxWxH: 60.80x39.20x12.70(mm)




### Pin-Out

Pin	Function
1	+ Vin
2	Ctrl
3	-Vin
4	0V
5	Sense-
6	Trim
7	Sense+
8	+Vo

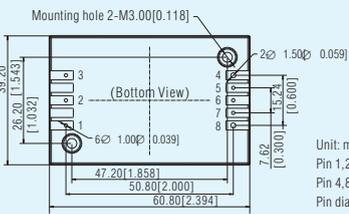


Unit: mm[inch]  
 Pin 1,2,3,5,6,7's diameter:1.00[0.039]  
 Pin 4,8's diameter:1.50[0.059]  
 Pin diameter tolerance: ±0.10[±0.004]  
 General tolerance: ±0.50[±0.020]  
 Mounting hole screwing torque:Max 0.4 N.m

With heat sink LxWxH: 62.00x39.20x30.80(mm)

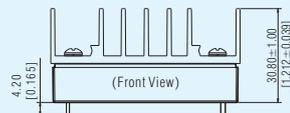


### Pin-Out

Pin	Function
1	+ Vin
2	Ctrl
3	-Vin
4	0V
5	Sense-
6	Trim
7	Sense+
8	+Vo




## URF1DxxHB Series Package Dimension

Without heat sink LxWxH: 57.90x61.00x12.70(mm)





### Pin-Out


Pin	Function
1	+ Vin
2	Ctrl
3	Case
4	-Vin
5	0V
6	Sense-
7	Trim
8	Sense+
9	+OV

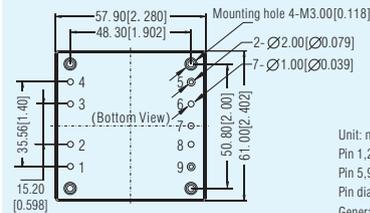

Unit: mm[inch]  
 Pin 1,2,3,4,6,7,8's diameter:1.00[0.039]  
 Pin 5,9's diameter:2.00[0.079]  
 Pin diameter tolerance: ±0.10[±0.004]  
 General tolerance: ±0.50[±0.020]  
 Mounting hole screwing torque:Max 0.4 N.m

With heat sink 57.90x62.00x30.80(mm)





# EMC Auxiliary Device

1. EMC filter.....	84-85
2. EMI filter.....	85
3. Surge suppressor.....	86
4. Pulse group suppressor.....	86
5. 485-AB Bus surge protection module.....	87
6. Common mode filter.....	87

# EMC Filter Specialized for AC/DC Converter

RoHS

## Features

- Greatly improve EMS performance of LD/LH/LH-ER2/LM30
- Enable EMI performance to meet requirements of CISPR22/EN 55022 Class B standard
- Input voltage range: 85-305VAC
- Operating temperature: -40°C to +85°C
- Compact size, cost-effective
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting

## Product Program

Model Number	Input Voltage Range (VAC)	Nominal Current (A)(max)	Outstanding Features	Certification
FC-LX1D	85-305	1.5	Surge: $\pm 2KV/\pm 4KV$	RoHS
FC-LX1D2	85-305	1.5	Surge: $\pm 4KV/\pm 6KV$	
FC-L01DV1	85-305	0.3	Surge: $\pm 1KV/\pm 2KV$	


Note: Series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting.



A2S Chassis Mounting Package

A4S DIN-Rail Mounting Package

## PCB Mounting Package Dimension

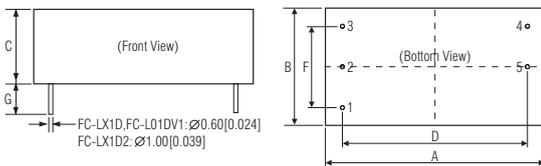

## Outline & Dimensions

NO	FC-LX1D	FC-LX1D2	FC-L01DV1
A	33.70	53.80	33.70
B	22.20	28.80	22.20
C	18.00	19.00	18.00
D	28.00	45.72	28.00
F	15.24	20.32	15.24
G	6.00	6.00	6.00

## Pin-Out

Pin	Function
1	$\perp$
2	IN(N)
3	IN(L)
4	OUT(L)
5	OUT(N)

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]  
Unmarked Tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]

# EMC Filter Specialized for DC/DC Converter

RoHS

## Features

- Greatly improve EMS & EMI performance of 2:1/4:1 wide input voltage DC/DC converter
- Efficiency up to 98%
- Compact size, cost-effective
- Slow start-up function
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Meet IEC/EN61000-4 series standard and CISPR22/En55022
- Reverse voltage protection

## Product Program

Model Number	Input Voltage Range (VDC)	Max. Output Power(W)/Nominal Current(A)	Outstanding Features	Certification
FC-AX3D	10-36	30W	Reverse voltage protection and slow start-up function	RoHS
FC-B02D	18-75	30W		
FC-D03D	18-36	50W		
FC-E03D	36-75	75W	Small volume	
FC-A01D	9-36	1A		
FC-B01D	18-75	1A		


Note: Series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting.



A2S Chassis Mounting Package

A4S DIN-Rail Mounting Package

## PCB Mounting Package Dimension

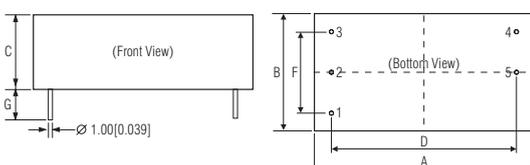

## Outline & Dimensions

No	FC-AX3D	FC-B02D	FC-D03D	FC-E03D	FC-A01D	FC-B01D
A	53.80	53.80	53.80	53.80	37.00	37.00
B	28.80	28.80	28.80	28.80	23.00	23.00
C	19.00	19.00	19.00	19.00	15.00	15.00
D	45.72	45.72	45.72	45.72	30.48	30.48
F	20.32	20.32	20.32	20.32	17.78	17.78
G	6.00	6.00	6.00	6.00	4.10	4.10

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]  
General tolerance:  $\pm 0.25$  [ $\pm 0.010$ ]  
Unmarked Tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]

## Pin-Out

Pin	Function
1	$\perp$
2	-Vin
3	+Vin
4	+Vo
5	-Vo

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

## EMC Filter Specialized for Railway Power Supply

RoHS

### Features

- Improve EMI & EMS performance of 10-100W Railway power supply
- Enable the railway power supply to meet requirements of EN50155 standard
- Efficiency up to 98%
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Meet railway industry EN50155 standard
- Meet IEC/EN61000-4 series standard and CISPR22/EN55022
- Reverse voltage protection

### Product Program

Model Number	Input Voltage Range (VDC)	Max. Output Power (W)	Outstanding Features	Certification
FC-C01D	40-160	10	Reverse voltage protection	RoHS
FC-CX1D	40-160	30		
FC-C03D	40-160	50		
FC-CX3D	66-160	100	Input over-voltage protection	

Note: 1. Used with DC/DC converter. 2. Series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting.




A2S Chassis Mounting Package



A4S DIN-Rail Mounting Package

### PCB Mounting Package Dimension

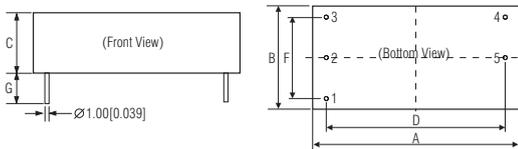

### Outline & Dimensions

No	FC-C01D	FC-CX1D	FC-C03D	FC-CX3D
A	50.80	53.80	53.80	53.80
B	25.40	28.80	28.80	28.80
C	15.16	19.00	19.00	23.50
D	45.72	45.72	45.72	45.72
F	20.32	20.32	20.32	20.32
G	6.00	6.00	6.00	6.00

Unit: mm[inch]

Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$  General tolerance:  $\pm 0.25[\pm 0.010]$  Unmarked Tolerance:  $\pm 0.50[\pm 0.020]$

### Pin-Out

Pin	Function
1	$\perp$
2	-Vin
3	+Vin
4	+Vo
5	-Vo

## EMI Filter Specialized for DC/DC Converter

RoHS

### Features

- Improve EMI performance of 0-80V wide input voltage DC/DC converter with under 3A input current
- Enable MORN SUN DC/DC converter to meet requirements of EN 55022 Class B standard
- Attenuation rate up to 20dB
- Low temperature rise
- Restrain the EMI with DC input circuit
- Compact size, cost-effective
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting



A2S Chassis Mounting Package




A4S DIN-Rail Mounting Package

### Product Program

Model Number	Input Voltage Range (VDC)	Nominal Current (A)(max)	Outstanding Features	Certification
FI-B03D	0-80	3	Meet EMI requirements of Class B standard	RoHS

Note: Series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting.

### Package Dimension LxWxH: 25.40x25.40x11.70(mm)

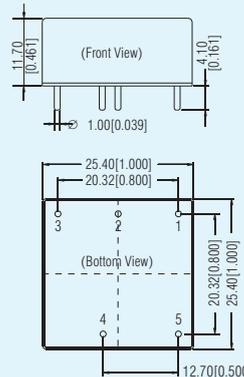

### Pin-Out

Pin	Function
1	+Vin
2	-Vin
3	GND
4	-Vo
5	+Vo

Unit: mm[inch]

Pin diameter tolerance:  $\pm 0.10[\pm 0.004]$

General tolerance:  $\pm 0.25[\pm 0.010]$


Unmarked Tolerance:  $\pm 0.50[\pm 0.020]$

# Surge Suppressor Specialized for DC/DC Converter

RoHS

## Features

- Improve surge handling capability of 0-40V wide input DC/DC converter
- Enable MORN SUN DC/DC converter to meet  $\pm 2KV/\pm 4KV$ (Level Four) requirements of IEC/EN61000-4-5
- Attenuation rate up to 30dB
- Low temperature rise
- Compact size, cost-effective
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Designed to suppress the DC power surge to achieve primary protection

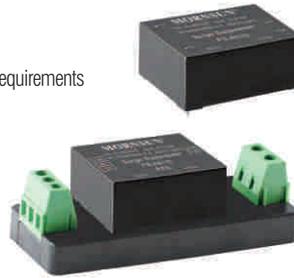

A2S Chassis Mounting Package



A4S DIN-Rail Mounting Package


## Product Program

Model Number	Input Voltage Range (VDC)	Nominal Current (A)(max)	Outstanding Features	Certification
FS-A01D	0-40	0.6	Surge: $\pm 2KV/\pm 4KV$	RoHS

Notes: 1. Being used with surge suppressor can meet surge level of IEC/EN61000-4-5  $\pm 2KV$  (2 $\Omega$  internal resistance)/ $\pm 4KV$ (12 $\Omega$  internal resistance).  
2. Series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting.

## Package Dimension

LxWxH: 33.70x22.20x18.00(mm)

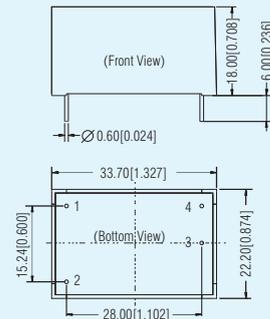

## Pin-Out

Pin	Function
1	-Vin
2	+Vin
3	+Vo
4	-Vo

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10$ [ $\pm 0.004$ ]  
General tolerance:  $\pm 0.25$ [ $\pm 0.010$ ]  
Unmarked Tolerance:  $\pm 0.50$ [ $\pm 0.020$ ]

# Pulse Group Suppressor Specialized for DC/DC Converter

RoHS

## Features

- Improve pulse group suppressor performance of 0-80V wide input DC/DC converter
- Enable MORN SUN DC/DC converter to meet  $\pm 4KV$  requirements of IEC/EN61000-4-4
- Attenuation rate up to 30dB
- Low temperature rise
- Compact size, cost-effective
- Optional packages: PCB mounting, chassis mounting, DIN-Rail mounting
- Designed to suppress the DC power interference



A2S Chassis Mounting Package



A4S DIN-Rail Mounting Package


## Product Program

Model Number	Input Voltage Range (VDC)	Nominal Current (A)(max)	Outstanding Features	Certification
FT-BX1D	0-80	1.5	meet $\pm 4KV$ requirements of pulse group suppressor	RoHS

Note: Series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting.

## Package Dimension

LxWxH: 33.70x22.20x18.00(mm)

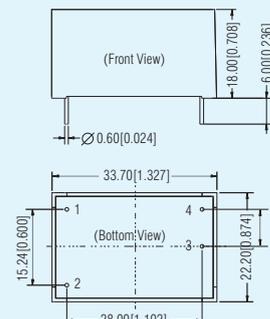

## Pin-Out

Pin	Function
1	-Vin
2	+Vin
3	+Vo
4	-Vo

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10$ [ $\pm 0.004$ ]  
General tolerance:  $\pm 0.25$ [ $\pm 0.010$ ]  
Unmarked Tolerance:  $\pm 0.50$ [ $\pm 0.020$ ]

# 485-AB Bus Surge Protection Module

RoHS

## Features

- Suppress signal port lightning surge
- Impact anti - current:  $\leq 1\text{KA}$  (8/20 $\mu\text{s}$  simulated lightning waveforms)
- Compact size, cost-effective
- Meet  $\pm 2\text{KV}/\pm 4\text{KV}$  surge level of IEC/EN61000-4-5




Product Program					
Model Number	Operating Voltage (VDC)	Clamping Voltage (VDC)	Nominal Current (A)	Data Rate (max)	Certification
FS-TD01D	0-5	15	$\leq 0.1$	$\leq 115.2\text{kbs}$	RoHS


### Notes:

1. Enable 485 modules to meet surge level of IEC/EN61000-4-5  $\pm 2\text{KV}$  (2 $\Omega$  internal resistance)/ $\pm 4\text{KV}$  (12 $\Omega$  internal resistance).
2. Customization is acceptable.

## Typical application

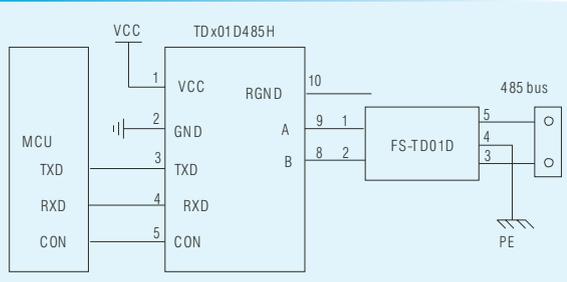

## Package Dimension

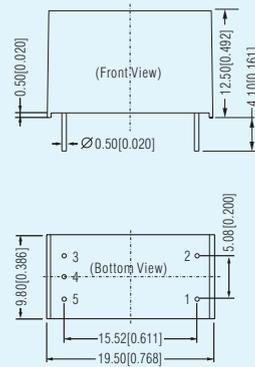

### Pin-Out

Pin	Designation	Function
1	A(out)	Output 485 BUS A
2	B(out)	Output 485 BUS A
3	B(in)	Input 485 BUS A
4	PE	Protective Earth
5	A(in)	Input 485 BUS A

Unit: mm[inch]  
 Pin section tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]  
 General tolerance:  $\pm 0.25$  [ $\pm 0.010$ ]  
 Unmarked Tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]

# Common Mode Filter

RoHS

## Features

- Low temperature rise
- Compact size



## Product Program

Model Number	Inductance ( $\mu\text{H}$ )	Nominal Current (A)	DCR (m $\Omega$ )	Weight (g)	Certification
FL2D-Z5-103	10000*2	0.5	500*2	4.5	RoHS
FL2D-Z5-153	15000*2	0.5	600*2	4.5	
FL2D-Z5-223	22000*2	1	650*2	4.5	
FL2D-10-102	1000*2	1	50*2	4.5	
FL2D-10-222	2200*2	1	60*2	4.5	
FL2D-10-332	3300*2	1	80*2	4.5	
FL2D-10-472	4700*2	1	140*2	4.5	
*FL2D-10-682	6800*2	1	160*2	6.5	
*FL2D-10-822	8200*2	1	180*2	6.5	
FL2D-30-102	1000*2	3	40*2	4.5	
FL2D-30-222	2200*2	3	42*2	4.5	
FL2D-30-472	4700*2	3	70*2	4.5	

Note: Dimension of model number marked with \* please refer to Fig. 2.

## Package Dimension

Figure 1:



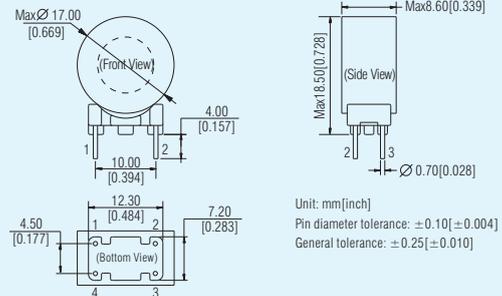


Figure 2:

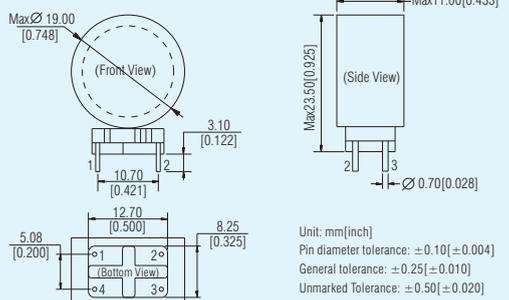



<b>1、 Industrial Bus Isolation Transceiver Module.....</b>	<b>89-92</b>
RS485 Isolated Transceiver.....	89
CAN isolated transceiver module .....	90
Integrated Isolated 485/CAN AC/DC Converter.....	91
Single/Dual Isolated RS232 transceiver (high-speed) .....	92
<b>2、 Signal Conditioning Module.....</b>	<b>93-97</b>
<b>3、 DC/DC Converter for IGBT Driver/IGBT Driver...98-101</b>	
<b>4、 LED Driver.....</b>	<b>102</b>
<b>5、 Isolation Transmitter.....</b>	<b>103-106</b>

# RS485 Isolated Transceiver



## Features

- Operating temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Isolation: 2500VDC (Low-rate) / 3000VDC (High-rate)
- Two-terminal isolation (input and output are mutually isolated), built-in isolated power supply bus protection
- TD3xxD485xx compatible with the UART port of  $+3.3\text{V}$   
TD5xxD485xx compatible with the UART port of  $+5\text{V}$
- Isolated voltage output
- ESD protection: IEC/EN61000-4-2 Contact  $\pm 4\text{KV}$  perf. Criteria B
- Compact size, DIP/SMD package




## Product Program

Model Number	Power Supply (VDC)	Baud Rate (max)	Nodes	Characteristics	Certification
TD321D485	3.15-3.45	19.2Kbps	64	Universal	RoHS CE
TD521D485	4.75-5.25	19.2Kbps	64	Universal	
TD321D485H	3.15-3.45	200Kbps	64	High-rate	
TD521D485H	4.75-5.25	200Kbps	64	High-rate	
TD321D485H-A	3.15-3.45	500Kbps	128	High-rate,	
TD521D485H-A	4.75-5.25	500Kbps	128	auto-switch	
TD321D485H-E	3.15-3.45	500Kbps	256	High-rate,	RoHS CE
TD521D485H-E	4.75-5.25	500Kbps	256	256 nodes	
TD322D485H-A	3.15-3.45	120Kbps	32	wo-way isolated channel (Auto-switch)	
TD522D485H-A	4.75-5.25	120Kbps	32	wo-way isolated channel (Auto-switch)	
TD321S485	3.15-3.45	19.2Kbps	64	SMD Low-rate	
TD521S485	4.75-5.25	19.2Kbps	64	SMD Low-rate	
TD321S485H	3.15-3.45	200Kbps	64	SMD High-rate	RoHS CE
TD521S485H	4.75-5.25	200Kbps	64	SMD High-rate	
TD321S485H-A	3.15-3.45	500Kbps	128	SMD Auto-switch module	
TD521S485H-A	4.75-5.25	500Kbps	128	SMD Auto-switch module	
TD321S485H-E	3.15-3.45	500Kbps	256	SMD High-rate(Enhanced)	
TD521S485H-E	4.75-5.25	500Kbps	256	SMD High-rate(Enhanced)	

## Package Dimension

TD5(3)21D485x Series; LXWXH: 18.20X14.80X7.10(mm)

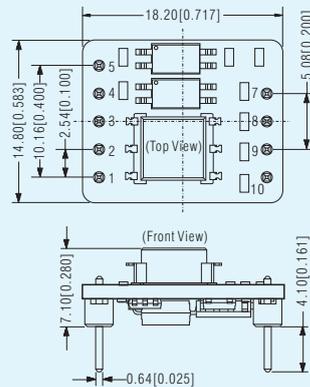


### Pin-Out

Pin	Function
1(VCC)	Input Power+
2(GND)	GND
3(TXD)	Send Pin
4(RXD)	Receiving Pin
5(CON)	Send&Receiving Control Pin
7(Vo)	+5V Isolation Power Output
8(B)	TD_D485 B Pin
9(A)	TD_D485 A Pin
10(GANG)	Isolation Power Output RGND

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$   
General tolerances:  $\pm 0.50 [\pm 0.020]$

TD5(3)22D485H-A Series; LxWxH: 20.00x17.00x7.00(mm)

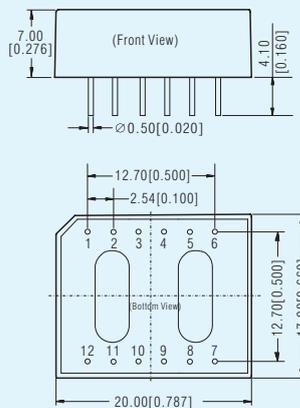


### Pin-Out

Pin	Function
1(VCC)	Input Power +
2(GND)	GND
3(TXD1)	Send Pin
4(RXD1)	Receiving Pin
5(TXD2)	TD_D485H-A Send pin 2
6(RXD2)	TD_D485H-A Receiving pin 2
7(A2)	TD_D485H-A A2 pin
8(B2)	TD_D485H-A B2 pin
9(SGND2)	Output GND
10(A1)	TD_D485H-A A2 pin
11(B1)	TD_D485H-A B1 pin
12(SGND1)	Output GND

Unit: mm[inch]  
Pin diameter tolerances:  $\pm 0.10 [\pm 0.004]$   
General tolerances:  $\pm 0.50 [\pm 0.020]$

TD5(3)21S485x Series; LXWXH: 18.20X14.80X7.10(mm)

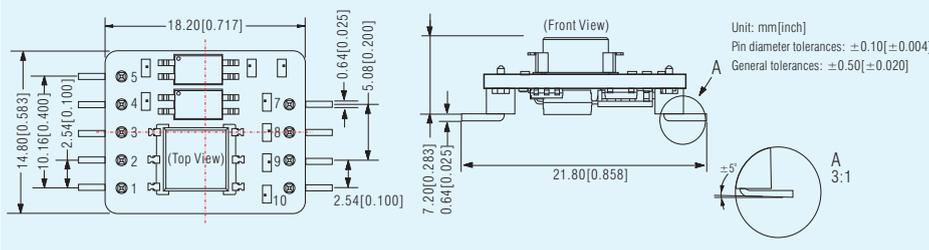

### Pin-Out

Pin	Function
1(VCC)	Input Power+
2(GND)	GND
3(TXD)	Send Pin
4(RXD)	Receiving Pin
5(CON)	Send&Receiving Control Pin
7(Vo)	+5V Isolation Power Output
8(B)	TD_D485 B Pin
9(A)	TD_D485 A Pin
10(GANG)	Isolation Power Output RGND


• This catalog is used to introduce our latest products, for more information, please contact our sales department

# CAN isolated transceiver module



## Features

- Operating temperature:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$
- Isolation: 3000VDC
- Two-terminal isolation (input and output are mutually isolated), built-in isolated power supply bus protection
- TD3xxDCANxx compatible with the CAN control port of  $+3.3\text{V}$   
TD5xxDCANxx compatible with the CAN control port of  $+5\text{V}$
- ESD protection: IEC/EN61000-4-2 Contact  $\pm 4\text{KV}$  perf. Criteria B
- Baud rate up to 5Mbps
- Meet ISO11898-2, ISO11898-5 Standards
- Connect up to 110 nodes on one bus
- Compact size, DIP/SMD package

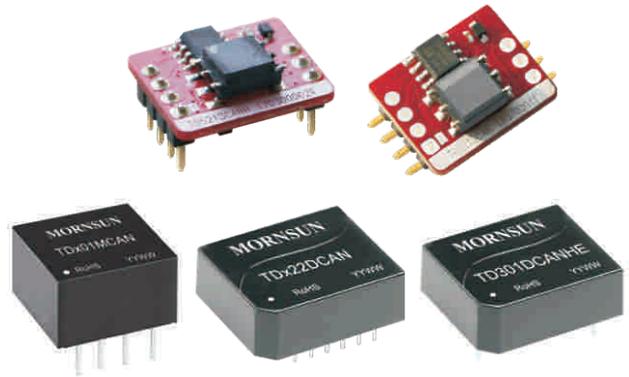


## Product Program

Model Number	Power Supply (VDC)	Baud Rate (max)	Nodes	Characteristics	Certification
TD321DCAN	3.3	5K-1Mbps	110	Universal	RoHS CE
TD521DCAN	5	5K-1Mbps	110	Universal	
TD321DCANH	3.3	40K-1Mbps	110	High-rate	
TD521DCANH	5	40K-1Mbps	110	High-rate	
TD321SCAN	3.3	5K-1Mbps	110	Universal SMD	
TD521SCAN	5	5K-1Mbps	110	Universal SMD	RoHS CE
TD321SCANH	3.3	40K-1Mbps	110	SMD High-rate	
TD521SCANH	5	40K-1Mbps	110	SMD High-rate	
TD322DCAN	3.3	40K-1Mbps	110	Dual channel isolated type	
TD522DCAN	5	40K-1Mbps	110	Dual channel isolated type	
TD301MCAN	3.3	40K-1Mbps	110	Compact Size	RoHS
TD501MCAN	5	40K-1Mbps	110	Compact Size	
TD301MCANFD	3.3	40K-5Mbps	110	Compact Size	
TD501MCANFD	5	40K-5Mbps	110	Compact Size	
TD301DCANHE	3.3	40K-1Mbps	110	High Surge Protective Type	
TD501DCANHE	5	40K-1Mbps	110	High Surge Protective Type	

## Package Dimension


TD5(3)21DCANx Series: LxWxH: 18.20x14.80x7.10(mm)

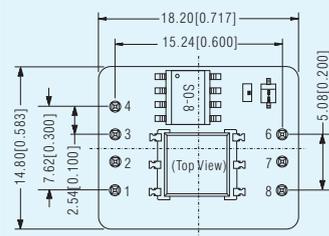


### Pin-Out

Pin	Function
1(VCC)	Input Power +
2(GND)	GND
3(TXD)	Send Pin
4(RXD)	Receiving Pin
6(CANH)	CANH Pin
7(CANL)	CANL Pin
8(CANG)	Isolation Power Output RGND

Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 1.00[\pm 0.039]$

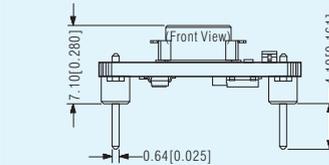


TD5(3)22DCAN Series: LxWxH: 20.00x17.00x7.00(mm)

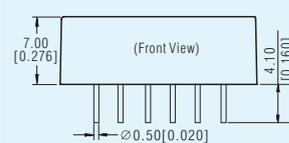


### Pin-Out

Pin	Function
1(VCC)	Input Power +
2(GND)	GND
3(RXD1)	TD_DCAN Receiving Pin1
4(TXD1)	TD_DCAN Send Pin1
5(RXD2)	TD_DCAN Receiving Pin2
6(TXD2)	TD_DCAN Send Pin2
7(CANH2)	CANH Pin2
8(CANL2)	CANL Pin2
9(CANG2)	Isolation Power Output2
10(CANH1)	CANH Pin1
11(CANL1)	CANL Pin1
12(CANG1)	Isolation Power Output RGND

Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 0.50[\pm 0.020]$

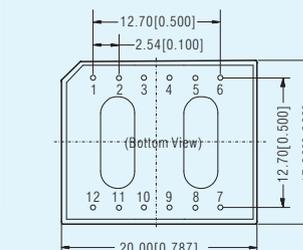

TD5(3)01MCAN(FD) Series LxWxH: 12.70x10.16x7.70(mm)

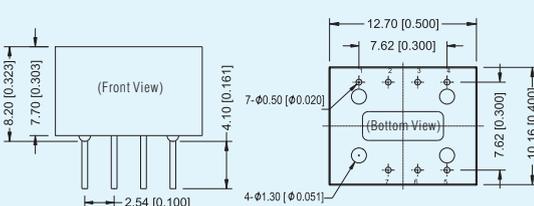


### Pin-Out

Pin	Function
1(RXD)	Receiving Pin
2(TXD)	Send Pin
3(GND)	GND
4(VCC)	Input Power +
5(CANG)	Isolation Power Output CANG
6(CANL)	CANL Pin
7(CANH)	CANH Pin

Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 0.25[\pm 0.010]$

## Package Dimension

TD5(3)21SCANx Series; LXWXH: 18.20X14.80X7.20(mm)

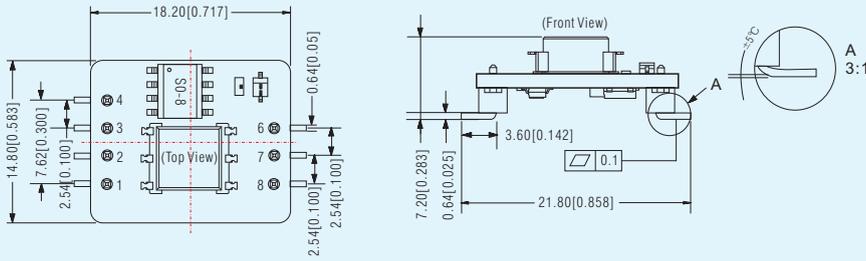


### Pin-Out

Pin	Function
1 (VCC)	Input Power+
2 (GND)	GND
3 (TXD)	Send Pin
4 (RXD)	Receiving Pin
6 (CANH)	CANH Pin
7 (CANL)	CANL Pin
8 (CANG)	Isolation Power Output PGND

Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 1.00[\pm 0.039]$

TD5(3)01DCANHE Series; LXWXH: 20.00X17.00X7.00(mm)

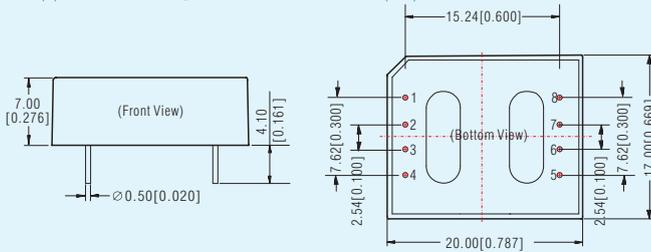

### Pin-Out

Pin	Function
1 (VCC)	Input Power+
2 (GND)	GND
3 (TXD)	TD_DCAN Send Pin
4 (RXD)	TD_DCAN Receiving Pin
5 (PE)	GND
6 (CANH)	TD_DCAN H Pin
7 (CANL)	TD_DCAN L Pin
8 (CANG)	Isolation Power Output CANG


Unit: mm[inch]  
Pin diameter tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 0.25[\pm 0.010]$

## Integrated Isolated 485/CAN AC/DC Converter

RoHS

### Features

- Wide input voltage range: 85 - 305VAC/100 - 430VDC
- AC and DC dual-use (input from the same terminal)
- Isolation: 4000VAC
- Output short-circuit, over-current protections
- Baud rate up to 1Mbps
- Connect up to 128 nodes on one bus
- Open frame, compact size, high power density
- Flexible Peripheral circuit design to get customers rid of layout problem

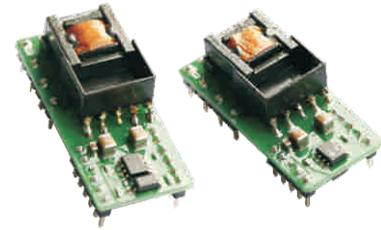


### 产品选型

Model Number	Power	Rated output voltage (V)	Rated output current I <sub>o</sub> (mA)	Effi (%) (typ)	Baud Rate (kbps)	Nodes	Certification
TLA03-03K485	3W	3.3V/5V	500/25	62	500	128	RoHS
TLA05-03K485		5V/5V	500/25	68	500	128	
TLA03-03KCAN	3W	3.3V/5V	500/25	62	5-1000	110	
TLA05-03KCAN		5V/5V	500/25	68	5-1000	110	

## Package Dimension

TLAx-03K485 Series; LxWxH: 44.16x19.62x16.34(mm)

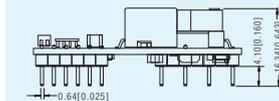


### Pin-Out

Pin	Function	Pin	Function
1	AC(L)	13	+Vo2
2	-	14	NC
3	AC(N)	15	A
4	-	16	B
5	+V(cap)	17	NC
6	-	18	CON
7	-V(cap)	19	RXD
8	-	20	TXD
9	-	21	VDD
10	-	22	+Vo1
11	-	23	-Vo1

Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 1.00[\pm 0.010]$

TLAx-03KCAN Series; LxWxH: 41.80x19.62x16.34(mm)

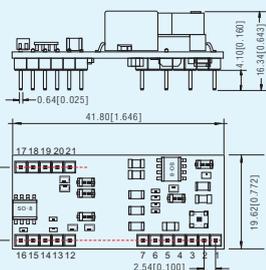


### Pin-Out

Pin	Function	Pin	Function
1	AC(L)	12	-Vo2
2	-	13	+Vo2
3	AC(N)	14	NC
4	-	15	CANH
5	+V(cap)	16	CANL
6	-	17	RXD
7	-V(cap)	18	TXD
8	-	19	VDD
9	-	20	+Vo1
10	-	21	-Vo1
11	-	22	-

Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 1.00[\pm 0.039]$

## Typical Application Circuit

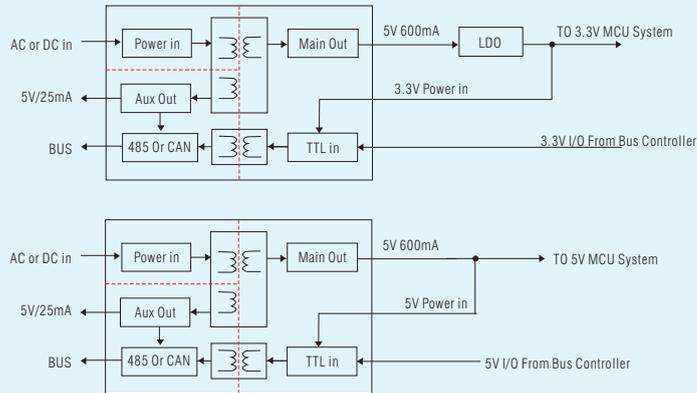

## Single/Dual Isolated RS232 transceiver (High-rate)

RoHS

### Features

- Operating temperature: -40°C to +85°C
- Isolation: 2500VDC
- Integrated high efficiency isolated power supply
- TD30xD232H compatible with the UART port of +3.3V
- TD50xD232H compatible with the UART port of +5V
- Low power consumption, low to 35mA
- ESD protection (human body discharge: ±4KV), complete EMC recommended circuit
- Meet EIA/TIA-232-F standard




### Product Program

Model Number	Power Supply (VDC)	Baud Rate (max)	Nodes	Certification	Certification
TD302D232H	3.0-3.6	0-115.2Kbps	2	High-rate	RoHS
TD502D232H	4.5-5.5	0-115.2Kbps	2	High-rate	
TD301D232H	3.0-3.6	0-115.2Kbps	1	High-rate	
TD501D232H	4.5-5.5	0-115.2Kbps	1	High-rate	

Note: Customization is acceptable.

### Package Dimension

TDx01D232H: LxWxH: 20.00x17.00x7.00(mm)

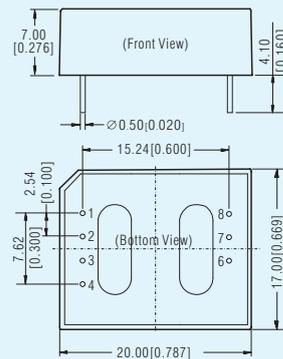

#### Pin-Out


Pin	Function
1(VCC)	Input Power+
2(GND)	GND
3(TXD)	TTL/CMOS Input
4(RXD)	TTL/CMOS Output
6(RIN)	Rs-232 Input
7(TOUT)	Rs-232 Output
8(RGND)	Isolation Power Output RGND

Unit: mm[inch]

Pin diameter tolerance: ±0.10[±0.004]

General tolerance: ±0.25[±0.010]

TDx02D232H: LxWxH: 20.00x17.00x7.00(mm)

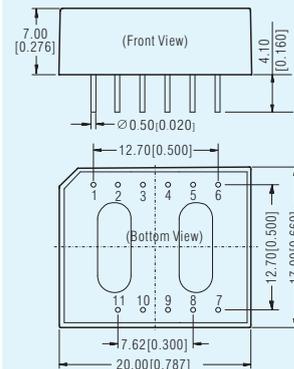

#### Pin-Out

Pin	Function
1(VCC)	Input Power +
2(GND)	GND
3(TXD1)	TTL/CMOS Input
4(RXD1)	TTL/CMOS Output
5(TXD2)	TTL/CMOS Input
6(RXD2)	TTL/CMOS Output
7(R2IN)	Rs-232 Input
8(T2OUT)	Rs-232 Output
9(R1IN)	Rs-232 Input
10(T1OUT)	Rs-232 Output
11(RGND)	Isolation Power Output RGND

Unit: mm[inch]

Pin diameter tolerances: ±0.10[±0.004]

General tolerances: ±0.25[±0.010]

# Active High Precision Positive Signal Conditioning Module



## Features





- Isolation: 2000VAC
- Two-terminal isolation (signal input and signal output)
- Frequency response  $\geq 2\text{KHZ}$
- Gain adjustment and zero adjustment function
- High precision & linearity: 0.1%F.S
- Extremely low temperature drift: 50PPM/°C (within -40°C to +85°C)



Product Program					
Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TE1530N	24	4-20mA	0-10V	None	RoHS CE
TE1533N	24	4-20mA	0-10V	24V	
TE1550N	12	4-20mA	0-10V	None	
TE1630N	24	4-20mA	0-5V	None	
TE1633N	24	4-20mA	0-5V	24V	
TE1660N	5	4-20mA	0-5V	None	
TE5534N	24	0-10V	0-10V	15V	
TE5544N	15	0-10V	0-10V	15V	
TE5554N	12	0-10V	0-10V	15V	
TE5634N	24	0-10V	0-5V	15V	
TE6634N	24	0-5V	0-5V	15V	
TE6644N	15	0-5V	0-5V	15V	
TE6654N	12	0-5V	0-5V	15V	
TE6664N	5	0-5V	0-5V	15V	
TE5530AN	24	$\pm 10\text{V}$	0-10V	None	
TE5650AN	12	$\pm 10\text{V}$	0-5V	None	
TE6630AN	24	$\pm 5\text{V}$	0-5V	None	

Product Program					
Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TE5540CN	15	$\pm 10\text{V}$	$\pm 10\text{V}$	None	RoHS CE
TE5550CN	12	$\pm 10\text{V}$	$\pm 10\text{V}$	None	
TE6640CN	15	$\pm 5\text{V}$	$\pm 5\text{V}$	None	
TE6650CN	12	$\pm 5\text{V}$	$\pm 5\text{V}$	None	
TEM5630AN	24	$\pm 75\text{mV}$	0-5VDC	None	RoHS CE
TEM6650AN	12	$\pm 75\text{mV}$	0-5VDC	None	
TEM6640AN	15	$\pm 100\text{mV}$	0-5VDC	None	
TEM4540CN	15	$\pm 50\text{mV}$	$\pm 10\text{VDC}$	None	
TEM6540CN	15	$\pm 100\text{mV}$	$\pm 10\text{VDC}$	None	
TEM6640CN	15	$\pm 100\text{mV}$	$\pm 5\text{VDC}$	None	
TEM7650CN	12	$\pm 200\text{mV}$	$\pm 5\text{VDC}$	None	

Signal Conditioning Module

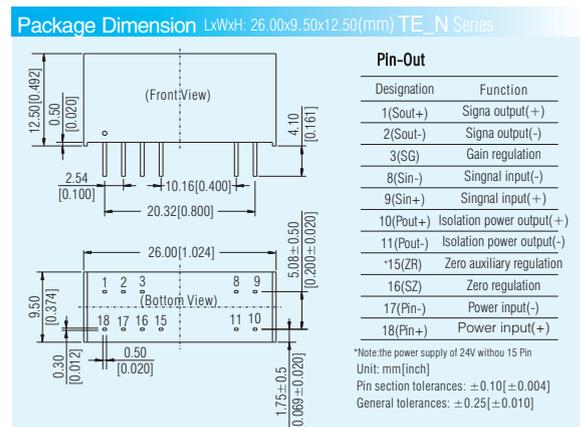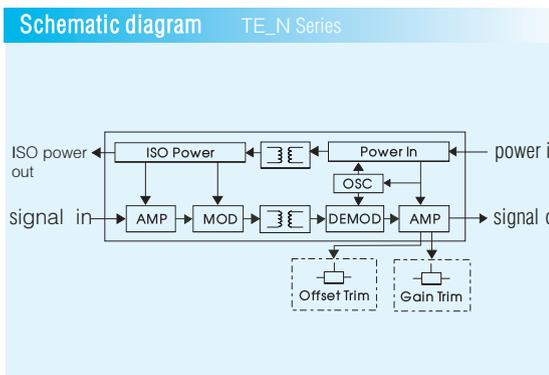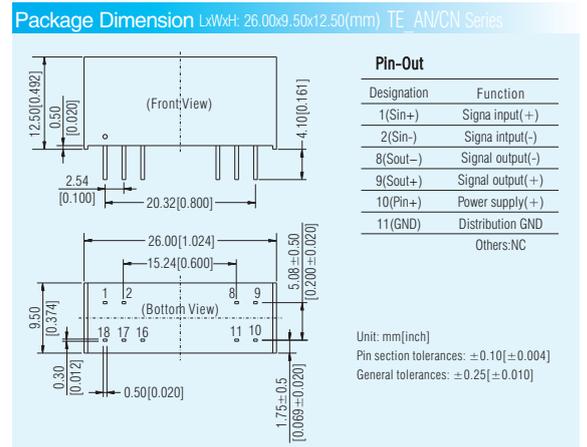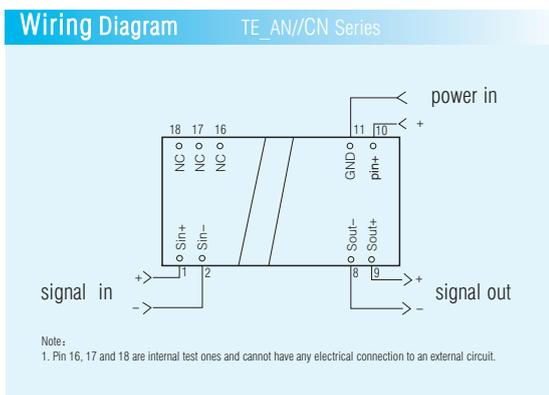

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# Active High Precision Output Signal Conditioning Module

CE RoHS

## Features

- Isolation: 2000VAC
- Two-terminal isolation (signal input and signal output)
- Frequency response  $\geq$  2KHZ
- Gain adjustment and zero adjustment function
- High precision & linearity: 0.1%F.S
- Extremely low temperature drift: 50PPM/°C (within -40°C to +85°C)




## Product Program


Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TF5134N	24	0-10V	4-20mA	15V	RoHS CE
TF5234N	24	0-10V	0-20mA	15V	
TF5534N	24	0-10V	0-10V	15V	
TF5554N	12	0-10V	0-10V	15V	
TF5634N	24	0-10V	0-5V	15V	
TF6134N	24	0-5V	4-20mA	15V	
TF6234N	24	0-5V	0-20mA	15V	
TF6250N	12	0-5V	0-20mA	/	
TF6254N	12	0-5V	0-20mA	15V	
TF6664N	5	0-5V	0-5V	15V	
TF6550GN	12	0-5V	-10Vto+10V	/	

Note: customization is acceptable.

## Schematic diagram

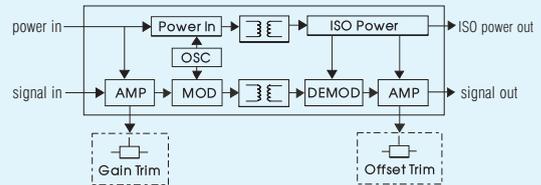

## Package Dimension LxWxH: 26.00x9.50x12.50(mm)

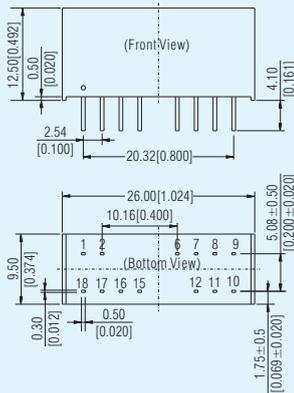

### Pin-Out

Pin	Function
1(Sout+)	Signal output(+)
2(Sout-)	Signal output(-)
6(GR)	Gain auxiliary regulation
7(SG)	Gain regulation
8(Sin-)	Signal input(-)
9(Sin+)	Signal input(+)
10(Pin+)	Power input(+)
11(Pin-)	Power input(-)
12(NC)	No connection
15(ZR)	Zero auxiliary regulation
16(SZ)	Zero regulation
17(Pout-)	Isolation power output(-)
18(Pout+)	Isolation power output(+)

Unit: mm[Inch]  
Pin section tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 0.25[\pm 0.010]$

# Active High Precision PWM input Signal Conditioning Module


CE RoHS

## Features

- Two-terminal isolation (signal input and signal output)
- High linearity (0.1% F.S.)
- Isolation voltage (2KVAC/60s)
- Low ripple & noise: ( $\leq$  30mVpp.TYP, 20MHz)
- Compact size: DIP18 (26\*9.5\*12.5mm)
- ESD protection (IEC/EN61000-4-2 Contact  $\pm$ 4KVperf. Criteria B)
- PWM signal input



## Package Dimension LxWxH: 26.00x9.50x12.50(mm)

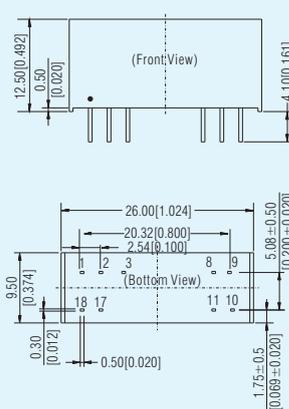

### Pin-Out

Pin	Function
1(Sout+)	Signal output(+)
2(Sout-)	Signal output(-)
3(NC)	No Connection
8(Sin-)	Signal input(-)
9(Sin+)	Signal input(+)
10(Pin+)	Power input(+)
11(Pin-)	Power input(-)
17(NC)	No Connection
18(NC)	No Connection


Unit: mm[Inch]  
Pin section tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 0.25[\pm 0.010]$

## Product Program

Model Number	Power Supply (VDC)	Input Signal(%)	Output Signal	Isolation Power Output	Certification
TFW260N	5V	0-100	0-20mA	None	RoHS CE
TFW560N	5V	0-100	0-10V	None	
TFW660N	5V	0-100	0-5V	None	

Note: Over nominal loop power voltage may damage modules.

## Application Circuit Diagram

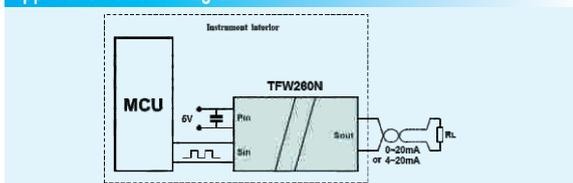

# Active High Precision (mV-class input) Signal Conditioning Module

RoHS


## Features

- Three-terminal isolation
- High precision & linearity: 0.1%F.S
- Isolation: 2500VDC
- Extremely low temperature coefficient: 50PPM/°C (within -25°C to +71°C)
- Low cost, compact package, high reliability, convenient to use



Product Program					
Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TM1130P	24	0~10mV	4~20mA	None	RoHS
TM3130P	24	0~30mV	4~20mA	None	
TM4130P	24	0~50mV	4~20mA	None	
TM4150P	12	0~50mV	4~20mA	None	
TM5230P	24	0~75mV	0~20mA	None	
TM6130P	24	0~100mV	4~20mA	None	
TM2550P	12	0~20mV	0~10V	None	
TM2650P	12	0~20mV	0~5V	None	
TM3650P	12	0~30mV	0~5V	None	
TM4530P	24	0~50mV	0~10V	None	
TM4630P	24	0~50mV	0~5V	None	
TM4650P	12	0~50mV	0~5V	None	
TM4660P	5	0~50mV	0~5V	None	
TM4S50P-2.5	12	0~50mV	0~2.5V	None	
TM5530P	24	0~75mV	0~10V	None	
TM5630P	24	0~75mV	0~5V	None	
TM5650P	12	0~75mV	0~5V	None	
TM6530P	24	0~100mV	0~10V	None	
TM6630P	24	0~100mV	0~5V	None	
TM6650P	12	0~100mV	0~5V	None	
TM6S50P-3.3	12	0~100mV	0~3.3V	None	
TM2S60P-2.5	5	0~20mV	0~2.5V	None	
TM5130P	24	0~75mV	4~20mA	None	
TM6660P	5	0~100mV	0~5V	None	
TM1630CP	24	±10mV	±5V	None	
TM2630CP	24	±20mV	±5V	None	
TM4530CP	24	±50mV	±10V	None	
TM4630CP	24	±50mV	±5V	None	
TM5530CP	24	±75mV	±10V	None	
TM5630CP	24	±75mV	±5V	None	
TM6530CP	24	±100mV	±10V	None	
TM6630CP	24	±100mV	±5V	None	
TM7650CP	12	±200mV	±5V	None	

## Package Dimension LxWxH: 31.60x20.30x10.20(mm)

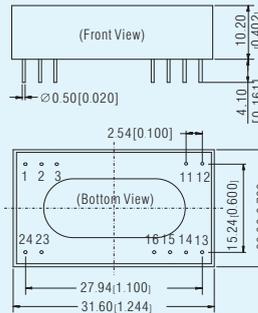


### Pin-Out


Pin	Vo	Io	Function
1	Sout-	Sout-	Signal output(-)
2	NC	Sout+	Signal output(+)
3	Sout+	NC	Signal output(+)
11	Sin+	Sin+	Signal input(+)
12	Sin-	Sin-	Signal input(-)
13,14	NC	NC	no connection
15,16	NC	NC	no connection
23	Pin+	Pin+	Power supply(+)
24	Pin-	Pin-	Power supply(-)

NC: no connection.  
Unit: mm[inch]  
Pin diameter tolerances: ±0.10[±0.004]  
General tolerances: ±0.50[±0.020]

## Wiring Diagram

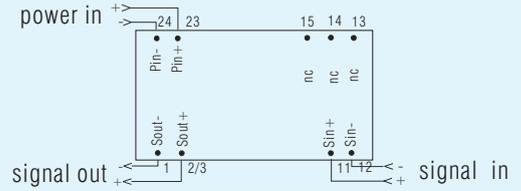

## EMC solution-recommended circuit TM...P Series

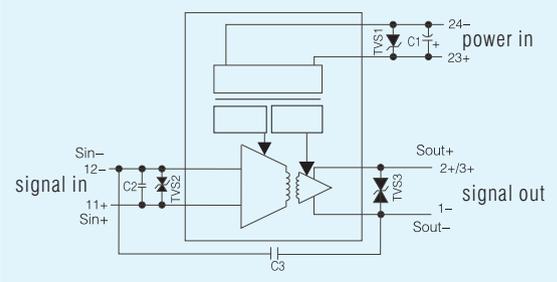

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# Active High Precision Signal Conditioning Module

RoHS

## Features

- Isolation: 2500VDC
- Four-terminal isolation
- High precision & linearity: 0.1%F.S
- Extremely low temperature drift: 50PPM/°C (within -40°C to +85°C)
- Low cost, compact package, high reliability, convenient to use



### Product Program


Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
T1130P	24	4-20mA	4-20mA	无	RoHS
T1133P	24	4-20mA	4-20mA	24V	
T1533P	24	4-20mA	0-10V	24V	
T2233P	24	0-20mA	0-20mA	24V	
T5133P	24	0-10V	4-20mA	24V	
T5530P	24	0-10V	0-10V	无	
T6130P	24	0-5V	4-20mA	无	
T6235P	24	0-5V	0-20mA	12V	
T6630P	24	0-5V	0-5V	无	
T6650P	12	0-5V	0-5V	无	

Note: Customization is acceptable.

### Product Program

Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
T5230CP	24	±10V	±20mA	无	RoHS
T5530CP	24	±10V	±10V	无	
T5533CP	24	±10V	±10V	24	
T5540CP	15	±10V	±10V	无	
T6630CP	24	±5V	±5V	无	
T6640CP	15	±5V	±5V	无	
T6650CP	12	±5V	±5V	无	
T6660CP	5	±5V	±5V	无	

### Package Dimension LxWxH: 31.60x20.30x10.20(mm)

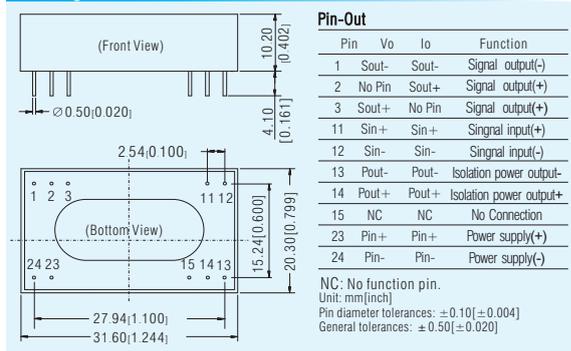


# Passive High Precision Signal Conditioning Module

CE RoHS

## Features

- Isolation: 3000VDC
- Two-terminal isolation (signal input and signal output)
- High precision & linearity: 0.1%F.S
- Extremely low temperature drift: 35PPM/°C
- Low voltage-drop: ≤ 3V (20mA input)
- High reliability(MTBF>500,000 hours)

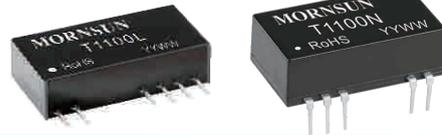


### Product Program

Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Channel	Certification
T1100L	None	4-20mA	4-20mA	None	1	CE RoHS
T1100N	None	4-20mA	4-20mA	None	1	
T1100L-F	None	4-20mA	4-20mA	None	1	
T1100NS-W	None	4-20mA	4-20mA	None	1	
T1100NS	None	4-20mA	4-20mA	None	1	


Note: Over nominal loop power voltage may damage modules.

### Product Program

T1100L/L-F: LxWxH: 32.00x7.90x14.50(mm)

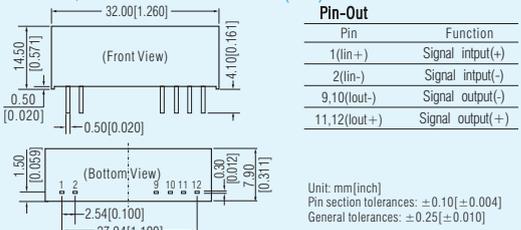


T1100N: LxWxH: 23.80x16.75x8.00(mm)

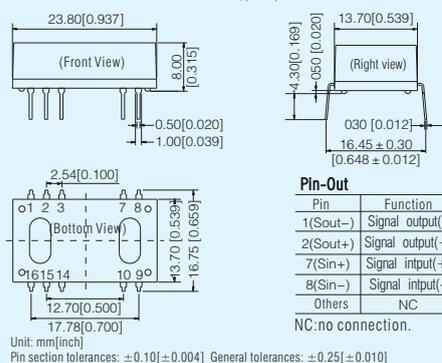

### Application Circuit Diagram

T1100L/ N Series

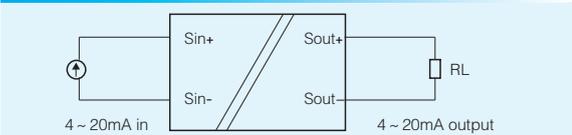

### Application Circuit Diagram(Loop Power)

T1100L-F Series



• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

# Two-wire Loop Power Supply Signal Conditioning Module(with HART) CE RoHS


- 4-20mA output loop stealing, 3.3V regulated output(loop power)
- Isolation: 2000VAC/1mA/60s
- Two-terminal isolation (signal input and signal output)
- High precision & linearity: 0.1%F.S
- Extremely low temperature drift: 50PPM/°C
- Convert digital signal(PWM) into 4-20mA
- HART compatible




Product Program					
Model Number	Loop Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
T747HL	10-24V	0-2.5V	3.7-22mA	3.3V	<div style="text-align: center;"> </div>
T797HL	15-24V	0-2.5V	3.7-22mA	3.3V	
TW147HL	10-24V	0-100%	4-20mA	3.3V	
T747L	10-24V	0-2.5V	3.7-22mA	3.3V	

Note: Customization is acceptable.

### Application with HART

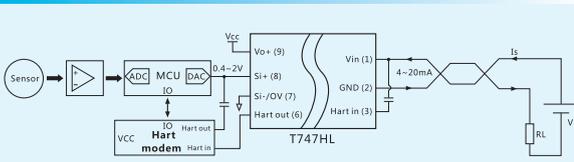

### Package Dimension LxWxH: 26.00x9.50x12.50(mm)

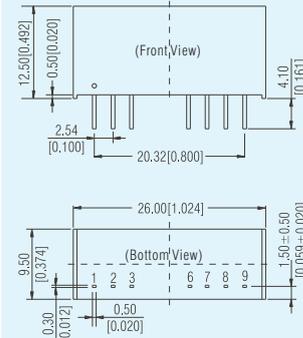

### Pin-Out

Pin	Function
1(Vin)	Power supply+
2(Io)	Current output
3(HART IN)	HART Signal input
6(HART OUT)	HART Signal output
7(VO/SI-)	Signal input-/Isolated output-
8(SI+)	Signal input+
9(VO+)	Isolated output+

Unit: mm[inch]  
 Pin section tolerances: ±0.10[±0.004]  
 General tolerances: ±0.25[±0.010]

# Active Detection Type RTD Signal Conditioning Module CE RoHS

### Features


- Two-wire, three-wire, four-wire pt100 RTD signal
- Isolation: 2000VAC
- High precision & linearity: 0.2%F.S
- Extremely low temperature drift: 50PPM/°C(Typ., within -40°C to +85°C)
- International standard signal output: 4-20mA/0-5V/0-10V etc.
- Low cost, compact package, high reliability, convenient to use




Product Program					
Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TRP16130P	24	Pt100(0-200°C)	4-20mA	None	<div style="text-align: center;"> </div>
TRP15130P	24	Pt100(0-100°C)	4-20mA	None	
TRP18130P	24	Pt100(-50-150°C)	4-20mA	None	
TRP15S30P-2.5	24	Pt100(0-100°C)	0-2.5V	None	
TRP16150P	12	Pt100(0-200°C)	4-20mA	None	

Note: Customization is acceptable.

### Application Circuit Diagram

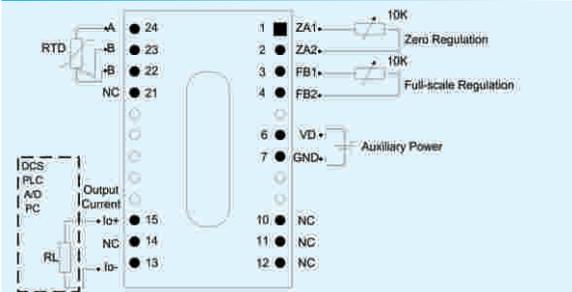

### Package Dimension LxWxH: 31.60x20.30x10.20(mm)

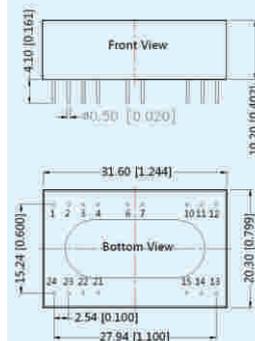

Pin	Function
1	ZA1 Zero Adjustment 1
2	ZA2 Zero Adjustment 2
3	FB1 Amplitude Adjustment 1
4	FB2 Amplitude Adjustment 2
8	VD Power Supply+
7	GND- Power Supply-
10	Vo+ Voltage Signal Output (+)
12	Vo- Voltage Signal Output (-)
11	Ia- Current Signal Output (-)
15	Ia+ Current Signal Output (+)
22	B Thermal Resistance Signal Input B
22	B Thermal Resistance Signal Input B
24	A Thermal Resistance Signal Input A
Others	NC Not available for electrical connection


Note:  
 Unit: mm[inch]  
 Pin diameter tolerances: ±0.10[±0.004]  
 General tolerances: ±0.50[±0.020]

# Active High Precision High Isolation Signal Conditioning Module

RoHS

## Features

- Suitable for electric power and railway applications
- Planar transformer bare board technology
- Isolation: 4000VAC/60s
- Two-terminal isolation (signal input and signal output)
- Low ripple & noise:  $\leq 35\text{mVpp}$  (20MHz)
- Extremely low temperature drift:  $\leq 50\text{PPM}/^\circ\text{C}$  (within  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

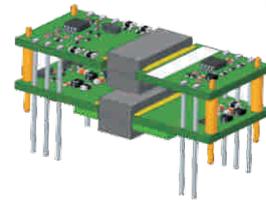


Note: design sketch for your reference.

## Product Program


Model Number	Power Supply (VDC)	Input Signal	Output Signal	Isolation Power Output	Certification
TE6650HN	12	0-5V	0-5V	None	RoHS

Note: Customization is acceptable.

## Schematic diagram

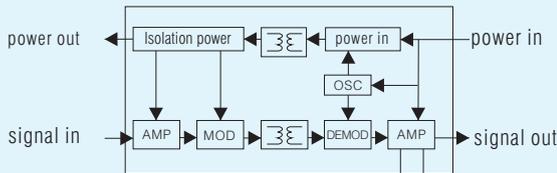

## Package Dimension

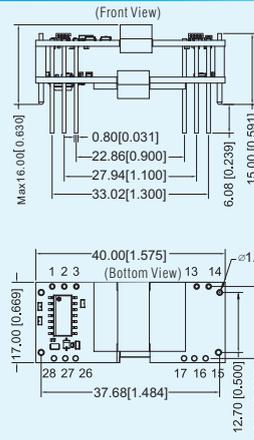

Unit: mm[inch]  
Pin diameter tolerances:  $\pm 0.10$  [ $\pm 0.004$ ]  
General tolerances:  $\pm 0.25$  [ $\pm 0.010$ ]

### Pin-Out

Pin	Function	Pin	Function
1	Sout-	15	Pout-
2	Sout+	16	Pout+
3	NC	17	NC
13	Sin+	26	NC
14	Sin-	27	Pin+
		28	Pin-

# DC/DC Converter for IGBT Driver


RoHS

## Features

- Operating temperature:  $-40^\circ\text{C}$  to  $+105^\circ\text{C}$
- Efficiency up to 81%
- Isolation: 3000VAC
- Low isolation capacitance
- No-load operation allowed
- Ultra-miniature SIP package



## Package Dimension LxWxH: 19.50x9.80x12.50(mm)

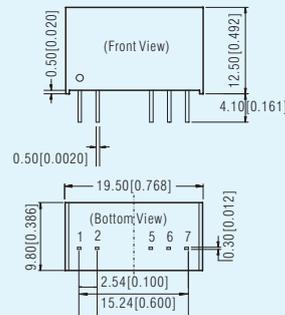

### Pin-Out

Pin	Function
1	Vin
2	GND
5	-Vo
6	0V
7	+Vo

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]  
General tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]

## Product Program


Model Number	Nominal Input Voltage(VDC)	Input Voltage Range (VDC)	Positive Output (VDC)	Negative Output (VDC)	Output current(mA)	Efficiency	Max. Capacitive Load( $\mu\text{F}$ )	Certification
QA01	15	14.5-15.5	+15	-8.7	+80/-40	80%	220	RoHS
QA02	12	11.6-12.4	+15	-8.7	+80/-40	80%	220	
QA03	24	23.3-24.7	+15	-8.7	+80/-40	80%	220	
QA04	12	9-15	+15	-8	+100/-80	80%	220	
QA121	12	11.4-12.6	+15	-8	+120/-120	81%	1000	RoHS
QA151	15	14.25-15.75	+15	-8	+120/-120	81%	1000	
QA241	24	22.8-25.2	+15	-8	+120/-120	81%	1000	

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)


# DC/DC Converter Specialized for SiC MOSFET Driver

## Features


- Operating temperature: -40°C to +105°C
- Isolation: 3500VAC/6000VDC
- Efficiency up to 83%
- Extremely low isolation capacitance: 3.5pF
- Continuous short-circuit protection
- DC/DC converter for SiC MOSFET Driver



## Package Dimension LxWxH: 19.50x9.80x12.50(mm)

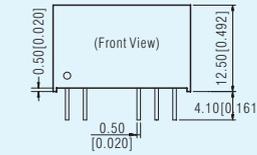

Pin	Function
1	Vin
2	GND
5	-Vo
6	0V
7	+Vo

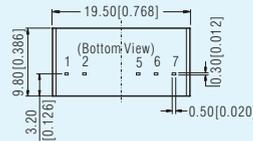

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10 [\pm 0.004]$   
General tolerance:  $\pm 0.25 [\pm 0.010]$

## Product Program

Model Number	Nominal Input Voltage (VDC)	Nominal(Range)	Positive Output (VDC)	Negative Output (VDC)	Output current(mA)	Efficiency	Isolation(VAC)	Certification
QA01C	15	13.5-16.5	+20	-4	+100/-100	83	3500	   <b>RoHS</b>
QA1201C-20	12	10.8-13.2	+20	-4	100/10	80	3500	<b>RoHS</b>
QA2401C-20	24	21.6-26.4	+20	-4	+100/-100	83	3500	
QA15115R2	15	13.5-16.5	+15	-2.5	+100/-100	80	3500	
QA01C-18	15	13.5-16.5	+18	-3	+100/-100	83	3500	
QA121C2	12	10.8-13.2	+15	-3.5	+111/-111	78	3500	
QA151M	15	14.4-15.9	+15	-5	+100/-100	80	3500	

# Great Power DC/DC Converter Specialized for IGBT Driver


## Features

- Operating temperature: -40°C to +85°C
- High isolation: 3000VDC/4000VAC/12000VDC
- Extremely low isolation capacitance: 3pF
- Efficiency up to 87%
- 2:1 Wide input voltage range (QAW series)
- DIP package
- Continuous short-circuit and input under-voltage protection, self-recovery




## Package Dimension

LxWxH: 51.50x26.50x12.00(mm) QA156D-24

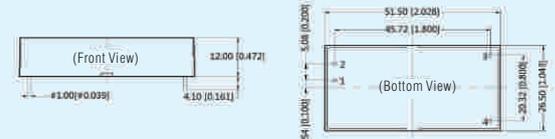

LxWxH: 31.60x20.30x10.20(mm) QAW01/QAW02/QA152D

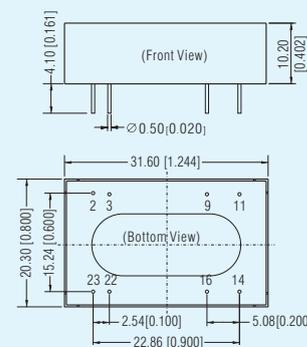

Pin	Function
2,3	GND
9	0V
11	-Vo
14	+Vo
16	0V
22,23	Vin

Unit: mm[inch]  
Pin diameter tolerance:  $\pm 0.10 [\pm 0.004]$   
General tolerance:  $\pm 0.25 [\pm 0.010]$   
Unmarked Tolerance:  $\pm 0.50 [\pm 0.020]$

## Product Program

Model Number	Input Voltage(VDC)	Nominal(Range)	Positive Output (VDC)	Negative Output (VDC)	Output current(mA)	Efficiency	Isolation	Certification
QAW01	12	9-18	+15	-9	+200/-200	85%	3000VDC	<b>RoHS</b>
QAW02	24	18-36	+15	-9	+200/-200	85%	3000VDC	
QA152D	15	13.5-16.5	+15	-9	+200/-200	87%	4000VAC	<b>RoHS</b> 
QA156D-24	15	13.5-16.5	+24	/	150/15	80%	12000VDC	<b>RoHS</b>

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# Automotive Wide voltage input DC/DC Converter Specialized for IGBT Driver


RoHS

## Features

- Wide input voltage range
- Efficiency up to 83%
- Isolation: 3000VDC
- Operating temperature: -40°C to +105°C
- International standard pin output



## Product Program LxWxH: 31.60x20.30x10.20(mm)

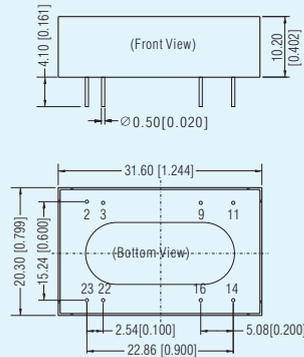

Pin	Function
2,3	GND
9	0V
11	-Vo
14	+Vo
16	0V
22,23	Vin

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10 [\pm 0.004]$   
General tolerance:  $\pm 0.50 [\pm 0.020]$

## Product Program


Model Number	Nominal Input Voltage (VDC)	Nominal(Range)	Positive Output (VDC)	Negative Output (VDC)	Output current(mA)	Efficiency	Isolation(VAC)	Certification
CQAW01	12	7-18	+15	-9	+200/-200	83	3000	RoHS

# Hybrid Integrated IGBT Driver (Built-in Isolated DC/DC Converter)


CE RoHS

## Features

- Built-in DC/DC isolated power supply, single power supply required
- Isolation: 3750VAC
- Switching frequency up to 20KHz
- Short-circuit and fault feedback function
- Output cut-off after short circuit protection occurs and timing reset
- Adjustable fault detection rejection time (dead zone)
- Adjustable soft-off time

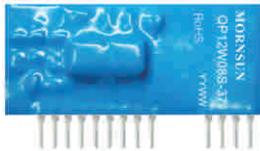

## Product Program LxWxH: 52.00x26.00x15.00(mm)

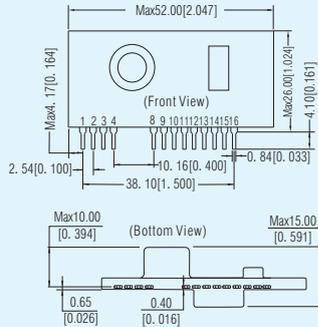

Pin	Function
1	Power supply +
2	Power supply-
3	Drive signal input+
4	Drive signal input-
8	DC/DC converter output+
9	DC/DC converter output(COM)
10	DC/DC converter output-
11	Drive output
12	Collector of internal power tube
13	Detect of short circuit
14	Adjustment of Soft turn-off time
15	Fault signal output
16	Adjustment of short-circuit detection time delay

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10 [\pm 0.004]$   
General tolerance:  $\pm 0.25 [\pm 0.010]$   
Unmarked Tolerance:  $\pm 0.50 [\pm 0.020]$

## Product Program

Model Number	Nominal Input Voltage (VDC)	Input Voltage Range(VDC)	VOH(VDC)	VOL(VDC)	Output Peak Current(A)	Switching Frequency (Max.) (KHz)	Isolation(VAC)	Certification
QP12W08S-37	15	14.5-15.5	15	-9	$\pm 8$	20	3750	RoHS CE

# Hybrid Integrated IGBT Driver

RoHS

## Features

- Built-in high CMRR opto-coupler(CMRR: Typ: 30KV/  $\mu$  s, Min.: 15KV/  $\mu$  s)
- High isolation (3750VRMS/min)
- Short-circuit and fault out function
- Output soft-off when over current occurs and timing reset
- Adjustable short-circuit detection rejection time (dead zone)
- Switching frequency up to 40KHz
- Suitable for 600V/600A,1200V/400A and 1700V/200A series of IGBT modules
- Pin and characteristics compatible with M57962AL



**Product Program** LxWxH: 51.00x25.00x10.00(mm)

**(Front View)**

**(Bottom View)**

**Pin-Out**

Pin	Function
1	Fault detect
2	Reaction time
4	Power supply+
5	Drive output
6	Power supply-
7	Protective threshold adjustment
8	Fault signal output
13	Drive signal input-
14	Drive signal input+
3, 9, 10	NC

Unit: mm[inch]  
Pin section tolerance:  $\pm 0.10[\pm 0.004]$   
General tolerance:  $\pm 0.25[\pm 0.010]$   
Unmarked Tolerance:  $\pm 0.50[\pm 0.020]$

Product Program								
Series	Positive input Voltage(VDC)	Negative input Voltage(VDC)	Gate voltage (VDC)	Max. Driving Current (A)	Max.Frequency (KHz)	Drive way	Isolation	Certification
QC962-8A	15	-10	+15/-9	$\pm 8$	40	1	3750VAC	RoHS

# Constant current Great Power LED Driver

RoHS

## Features


- Efficiency up to 97%
- Constant current mode, great power output
- Analogue dimming + PWM dimming
- Remote ON/OFF
- Continuous short-circuit protection



## KC24H-R Series

Model Number	Input Voltage (Nominal)	Output Voltage (VDC)	Output Current (mA)	Efficiency(%, Typ.) Full Load
KC24H-300R(X1/X2/X3)	5.5-46 (24VDC)	3.3-36	0-300	95%
KC24H-350R(X1/X2/X3)			0-350	95%
KC24H-500R(X1/X2/X3)			0-500	95%
KC24H-600R(X1/X2/X3)			0-600	95%
KC24H-700R(X1/X2/X3)			0-700	95%

## Package Dimension LxWxH: 22.80x10.20x9.00(mm)

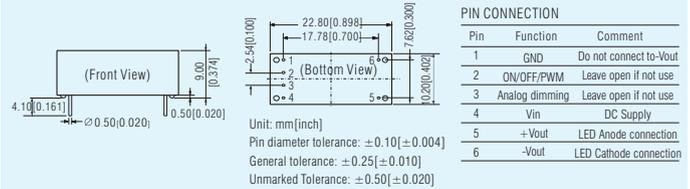


- Notes: 1. Series without a suffix such as KC24H-300R, this product is a four-pin product without the functions of analogue dimming and PWM dimming.  
 2. Series with a suffix X1 such as KC24H-300RX1, this product is a five-pin product only with the function of analogue dimming.  
 3. Series with a suffix X2 such as KC24H-300RX2, this product is a five-pin product only with the function of PWM dimming.  
 4. Series with a suffix X3 such as KC24H-300RX3, this product is a six-pin product with the functions of analogue dimming and PWM dimming.

## KC24W Series

Model Number	Input Voltage (Nominal)	Output Voltage (VDC)	Output Current (mA)	Efficiency(%, Typ.) Full Load
KC24W-300 (X1/X2/X3)	5.5-48 (24VDC)	3.3-36	0-300	96
KC24W-350 (X1/X2/X3)			0-350	96
KC24W-500 (X1/X2/X3)			0-500	96
KC24W-600 (X1/X2/X3)			0-600	96
KC24W-700 (X1/X2/X3)			0-700	96

## Package Dimension LxWxH: 22.30x12.55x9.10(mm)

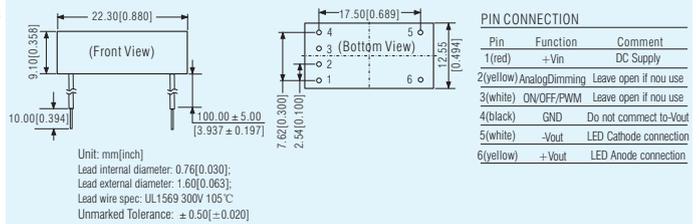


- Notes: 1. Series without suffix such as KC24W-300 are four-wire products without analogue dimming + PWM dimming.  
 2. Series with suffix X1 such as KC24W-300X1 are five-wire products with analogue dimming only.  
 3. Series with suffix X2 such as KC24W-300X2 are five-wire products with PWM dimming only.  
 4. Series with suffix X3 such as KC24W-300X3 are six-wire products with analogue dimming + PWM dimming.

## KC24RT Series

Model Number	Input Voltage Range (Nominal)	Output Voltage (VDC)	Output Current (mA)	Effi(%) (Max)
KC24RT-300	5.5-48 (24VDC)	3.3-36	0-300	96
KC24RT-350			0-350	96
KC24RT-500			0-500	96
KC24RT-600			0-600	96
KC24RT-700			0-700	96


## Package Dimension LxWxH: 23.86x18.10x8.00(mm)

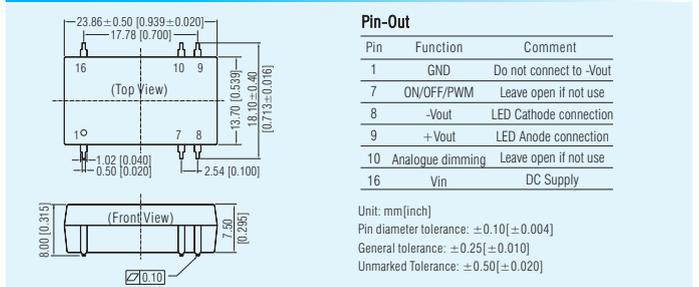

## KC24H-1000 & KC24H-1200 Series

Model Number	Input Voltage Range (Nominal)	Output Voltage (VDC)	Output Current (mA)	Effi(%) (Max)
KC24H-1000(X1/X2/X3)	5.5-48 (24VDC)	3.3-36	1000	97
KC24H-1200(X1/X2/X3)			1200	97

## Package Dimension LxWxH: 31.70x20.30x12.65(mm)

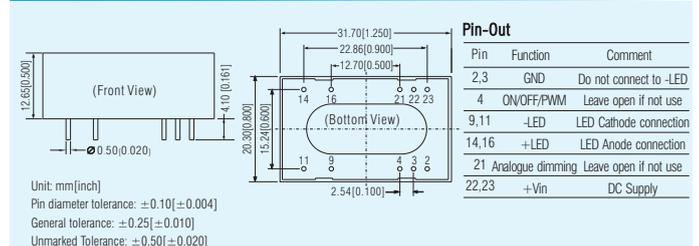

- Notes: 1. Series without suffix, such as KC24H-1000 are eight-pin products without analogue dimming + PWM dimming function.  
 2. Series with suffix X1 such as KC24H-1000X1 are nine-pin products with analogue dimming function only.  
 3. Series with suffix X2 such as KC24H-1000X2 are nine-pin products with PWM dimming function only.  
 4. Series with suffix X3 such as KC24H-1000X3 are ten-pin products with analogue dimming + PWM dimming function.

• This catalog is for reference only, please visit our website for detailed datasheets: [www.mornsun-power.com](http://www.mornsun-power.com)

# Ultra-thin Analog Signal Isolator

## Features


- Operating temperature: -25°C to +71°C
- Precision: 0.1% F.S.
- Isolation: 2000VAC/3000VDC (testing for 1Min, humidity < 70%, leakage current < 1mA)
- Input, output and power supply are mutually isolated from each other
- Temperature drift: 35PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m



Bottom power supply port

Product Program				
Model Number	Input Voltage Range(VDC)	Input Signal	Output Signal	Channel
TA100W-XX	18-30VDC	4-20mA	4-20mA; 0-10V	1 in 1 out
TA140W-XX		0-10V	0/4-20mA; 0-10V	
TA600W-XX	18-30VDC	4-20mA	4-20mA; 0-10V	1 in 2 out
TA640W-XX		0-10V	4-20mA; 0-10V	
TA200W-XX	18-30VDC	4-20mA	4-20mA; 0-10V	2 in 2 out
TA240W-XX		0-10V	0/4-20mA; 0-10V	

## Wiring Diagram

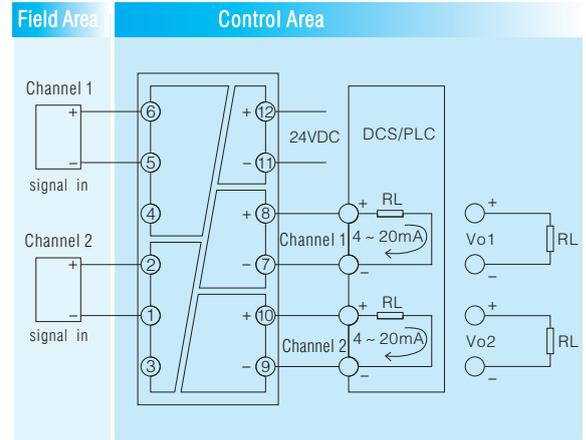

Note: above is wiring diagram of 2-wire circuit. Series with 1 in 2 out only connect input terminal with Channel 1, with 1 in 1 out connect input terminal and output terminal with Channel 1.

# Ultra-thin Analog Signal Isolator

## Features


- Operating temperature: -25°C to +71°C
- Input, output and power supply are mutually isolated from each other
- Precision: 0.1% F.S.
- Isolation: 2000VAC (testing for 1Min, humidity < 70%, leakage current < 1mA)
- Temperature drift: 35PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m



Bottom power supply port

Product Program				
Model Number	Input Voltage Range(VDC)	Input Signal	Output Signal	Channel
TA105W-XX	18-30VDC	4-20mA	4-20mA, 1-5V; 0-10V	1 in 1 out
TA605W-XX	18-30VDC	4-20mA	4-20mA, 0-10V	1 in 2 out
TA205W-XX	18-30VDC	4-20mA	4-20mA, 0-10V	2 in 2 out

## Wiring Diagram

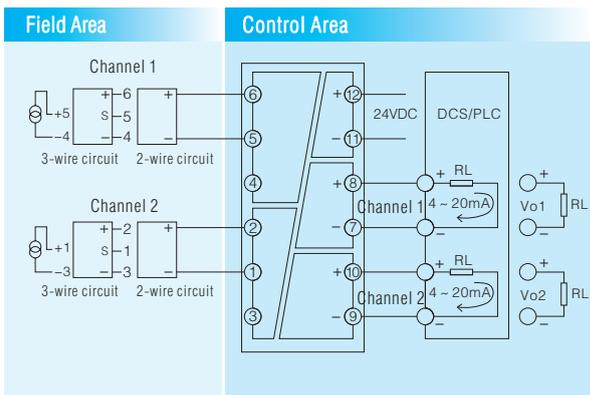

Note: above is wiring diagram of 2-wire circuit. Series with 1 in 2 out only connect input terminal with Channel 1, with 1 in 1 out connect input terminal and output terminal with Channel 1.

• This catalog is used to introduce our latest products, for more information, please contact our sales department


# Ultra-thin Passive Signal Isolator

## Features

- Operating temperature: -25°C to +71°C
- Isolation: 3000VAC/3000VDC (testing for 1Min, humidity < 70%, leakage current < 5mA)
- Precision: 0.1% F.S.
- Temperature drift: 35PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m



Product Program			
Model Number	Input Signal	Output Signal	Channel
TA106W-11	4~20mA	4~20mA	1 in 1 out
TA206W-11	4~20mA	4~20mA	2 in 2 out
TA306W-11	4~20mA	4~20mA	3 in 3 out

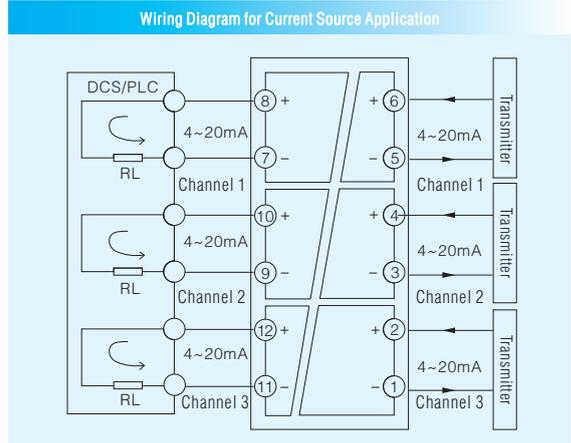

# Ultra-thin Programmable Analog Signal Isolator

## Features


- Operating temperature: -25°C to +71°C
- Isolation: 2000VAC/3000VDC (1Min, humidity < 70%, leakage current < 5mA)
- Input, output and power supply are mutually isolated from each other
- Precision: 0.1% F.S.
- Temperature drift: 50PPM/°C (within -25°C to +71°C )
- Radiated immunity: 10V/m



Product Program					
1 in 1 out	2 in 2 out	1 in 2 out	Input Voltage Range	Input Signal	Output Signal
TA100PW	TA200PW	TA600PW	18-30VDC	0/4-20mA(Programmable)	0/1-5V, 0/2-10V(Programmable)
TA120PW	TA220PW	TA620PW	18-30VDC	0/4-20mA(Programmable)	0/1-5V, 0/2-10V(Programmable)
TA130PW	TA230PW	TA630PW	18-30VDC	0/4-20mA(Programmable)	0/1-5V, 0/2-10V(Programmable)
TA140PW	TA240PW	TA640PW	18-30VDC	0/4-20mA(Programmable)	0/1-5V, 0/2-10V(Programmable)

Note:  
 1. Customers need to determine the type of input signal, measuring range and form of output signal while placing an order.  
 Customization is acceptable for special requirements.  
 2. The ancillary USB adapter model is T-01, please contact our sales department.

Wiring Diagram Bottom power supply port

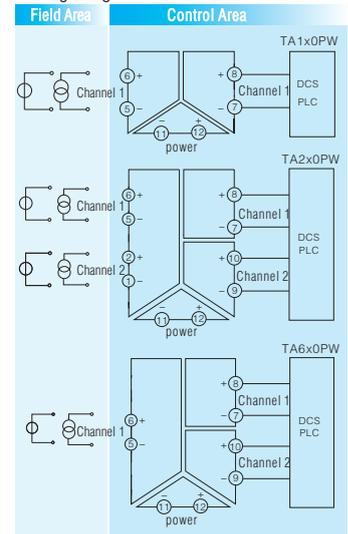

Isolation Transmitter

# Ultra-thin Programmable Analog Signal Isolator


## Features

- Operating temperature: -25°C to +71°C
- Isolation: 2000VAC/3000VDC (testing for 1Min, humidity < 70%, leakage current < 5mA)
- Input, output and power supply are mutually isolated from each other
- Precision: 0.1% F.S.
- Temperature drift: 35PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m



Bottom power supply port

## Wiring Diagram

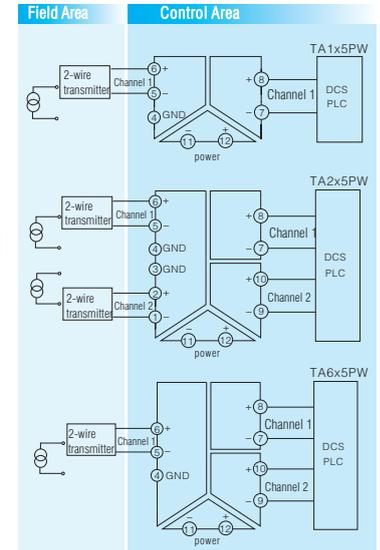

Product Program					
1 in 1 out	2 in 2 out	1 in 2 out	Input Voltage Range	Input Signal	Output Signal
TA105PW	TA205PW	TA605PW	18-30VDC	0/4-20mA(Programmable)	0/4-20mA(Programmable)
TA125PW	TA225PW	TA625PW	18-30VDC	0/4-20mA(Programmable)	0/1-5V;0/2-10V(Programmable)

Note:  
 1. Customers need to determine the type of input signal, measuring range and form of output signal while placing an order. Customization is acceptable for special requirements.  
 2. The ancillary USB adapter model is T-01, please contact our sales department.

# Ultra-thin Programmable RTD Signal Isolator


## Features

- Operating temperature: -25°C to +71°C
- Isolation: 2000VAC (testing for 1Min, humidity < 70%, leakage current < 5mA)
- Input, output and power supply are mutually isolated from each other
- Precision: 0.1% F.S./Max. (0.5°C)
- Temperature drift: 50PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m



Bottom power supply port

## Wiring Diagram

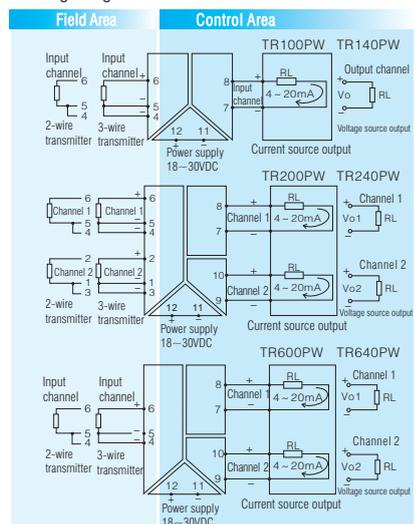

Product Program			
TR1x0PW TR6x0PW TR2x0PW	Descriptions		
	Type of Signal	Measuring Range	Measuring (Min.)
Input Signal	Pt100	-200 to +850°C	50°C
	Cu50	-50 to +150°C	50°C
	Cu100	-50 to +150°C	50°C
output signal	Output Current	0/4 to 20mA(Programmable)	
	Output Voltage	0/1 to 5V; 0/2 to 10V(Programmable)	

Note:  
 1. Customers need to determine the type of input signal, measuring range and form of output signal while placing an order. Customization is acceptable.  
 2. The ancillary USB adapter model is T-01, please contact our sales department.

• This catalog is used to introduce our latest products, for more information, please contact our sales department

# Ultra-thin Programmable RTD Signal Isolator with Perfect EMC Performance




## Features

- Operating temperature: -25°C to +71°C
- Isolation: 2000VAC (testing for 1Min, humidity <70%, leakage current <1mA)
- Precision: 0.1% F.S.
- Temperature drift: 50PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m

Product Program			
TR100PWE TR140PWE	Descriptions		
	Type of Signal	Measuring Range	Measuring (Min.)
Input Signal	Pt100	-200 to +850°C	50°C
	Cu50	-50 to +150°C	50°C
	Cu100	-50 to +150°C	50°C
output signal	Output Current	0/4-20mA(Programmable)	
	Output Voltage	0/1-5V/0/2-10V(Programmable)	

## Wiring Diagram

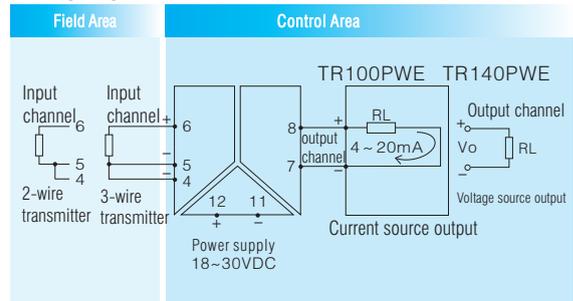

- Note:
1. Customers need to determine the type of input signal, measuring range and form of output signal while placing an order. Customization is acceptable.
  2. The ancillary USB adapter model is T-01, please contact our sales department.

# Ultra-thin Programmable Thermocouple Signal Isolator




## Features

- Operating temperature: -25°C to +71°C
- Isolation: 2000VAC/3000VDC (testing for 1Min, humidity <70%, leakage current <5mA)
- Input, output and power supply are mutually isolated from each other
- Precision: 0.1% F.S.
- Temperature drift: 50PPM/°C (within -25°C to +71°C)
- Radiated immunity: 10V/m

Product Program			
Type of Output	1 in 1 out	2 in 2 out	1 in 2 out
Model Number	TC100PW	TC200PW	TC600PW
	TC140PW	TC240PW	TC640PW
Input Signal	Type of Signal	Measuring Range	Measuring (Min.)
	R	-40 to +1700°C	600°C
	S	-40 to +1700°C	600°C
	K	-150 to +1370°C	120°C
	J	-80 to +900°C	100°C
	T	-160 to +390°C	100°C
	B	320 to +1820°C	780°C
	E	-80 to +700°C	500°C
output signal	Output Current	0/4-20mA(Programmable)	
	Output Voltage	0/1-5V/0/2-10V(Programmable)	

- Note:
1. Customers need to determine the type of input signal, measuring range and form of output signal while placing an order. Customization is acceptable.
  2. The ancillary USB adapter model is T-01, please contact our sales department.

## Wiring Diagram Bottom power supply port

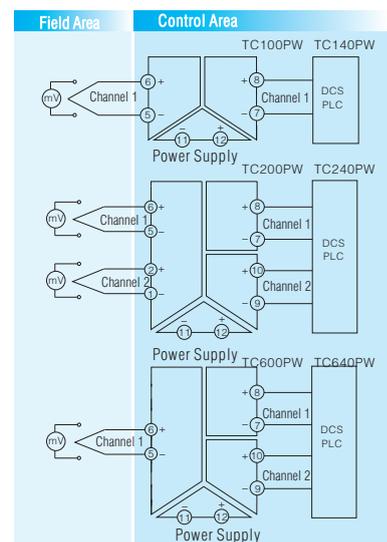

# Caution

## ■ Purpose:


To prevent potential safety problems while using the products.

## ■ Scope:

AC/DC, DC/DC, EMC Auxiliary Device, Isolation Transmitter, LED Driver and IGBT Driver manufactured by Mornsun Guangzhou Science & Technology Co., Ltd.

## ■ Contents:

Users should comply to all the contents of Product Datasheet carefully before selection, design, or production, and design and use the products according the requirements of Product Datasheet.

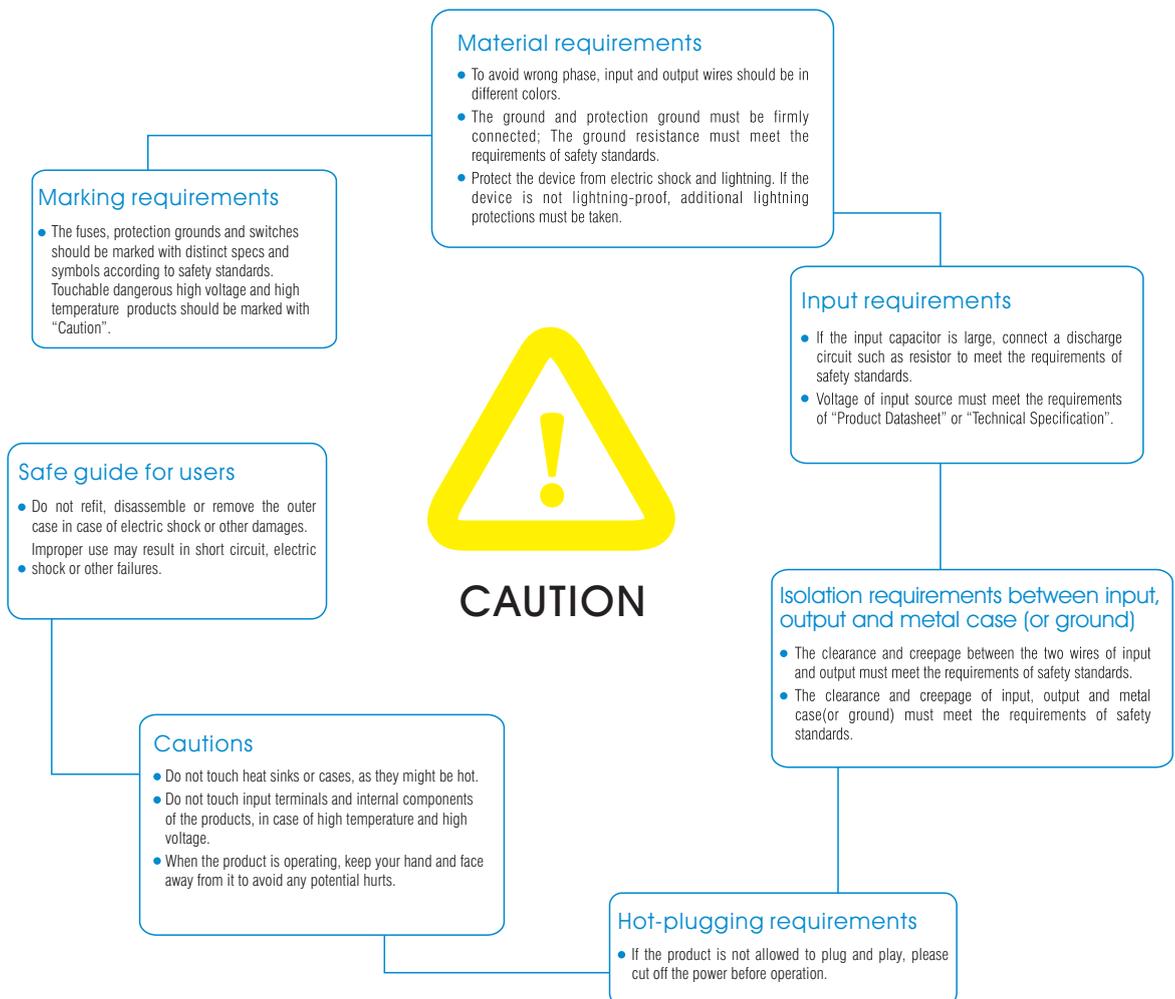

More information about application, please contact us.

Tel: 020-38601850 E-mail: fae@mornsun.cn


• This catalog is used to introduce our latest products, for more information, please contact our sales department

## DC/DC Converter testing suggestions

After selecting the right converter based on input and output requirements, the correct testing method must be used to ensure and verify specified performance parameters.

The following are suggested test methods and test equipment requirements.

Test conditions: ambient temperature  $T_A = 25^\circ\text{C}$   
humidity  $< 75\%$ , rated input and rated load.

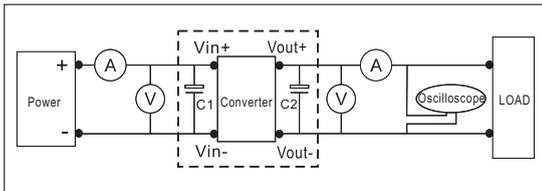

The model contains:

- DC adjustable regulated power supply : output voltage range is suitable for DC/DC converter under testing.
- current meter A : accuracy 0.001A
- voltage meter V: accuracy 0.001V
- load resistance: rated load:  $U \cdot U/P$   
light load:  $10 \cdot U \cdot U/P$
- wire: less wire loss is required. It is recommended to use 1mm multistand copper wire, which avoids over voltage drop.

Test:

### A: Wire

The proper wire shall be selected as described above. Smaller wire will result in potential errors in measuring the actual efficiency and regulation parameters. Ensure all mechanical and solder connections are sound as this will also result in errors.

### B: Grounding

Improper grounding may cause unintended noise to the circuit. When testing ripple and noise, it is recommended to use a single pole test method to observe the actual value. (please refer to the figure "ripple and noise" in page 95)

### C: Load

To ensure valid test data, the testing load of regulated products should be within 10~100% of the rated output current/power. It can test unregulated products at no load, but should be aware that the voltage accuracy is not specified at this load level.

### 1) Input voltage accuracy:

Set input voltage at nominal value and output at rated load, then mark the testing output voltage as  $V_{out}$  and the nominal output voltage as  $V_{nom}$ . The formula:

$$\frac{V_{OUT} - V_{NOM}}{V_{NOM}} \times 100\%$$

e.g: For regulated products IB1212LS-1W, the nominal input voltage is 12V, and rated load is  $144 \Omega$ . The output voltage reads 12.039V.

$$\frac{12.039\text{VDC} - 12.000\text{VDC}}{12.000\text{VDC}} \times 100\% = 0.325\%$$

### 2) Line regulation:

Isolated regulated series:

Line regulation equals difference ratio between max. and min. output voltage, when adjusting input voltage within its limitation at full load:

$$\text{Line regulation} = \frac{V_{OUTN} - V_{MDEV}}{V_{OUTN}} \times 100\%$$

- $V_{OUTN}$  -- output voltage at nominal input voltage and rated load
- $V_{OUTH}$  -- output voltage when input voltage at its upper limit
- $V_{OUTL}$  -- output voltage when input voltage at its lower limit
- $V_{MDEV}$  --  $V_{OUTH}$  or  $V_{OUTL}$  Which is deviated from  $V_{OUTN}$  more

Fixed input, isolated unregulated series:

$$\text{Line regulation} = \left| \frac{\Delta V_{OUT}}{\Delta V_{IN}} \right|$$

$$\Delta V_{OUT} = \frac{V_{OUT+10\%} - V_{OUT-10\%}}{V_{OUTNOM}} \times 100\%$$

$$\Delta V_{IN} = \frac{V_{IN+10\%} - V_{IN-10\%}}{V_{INNOM}} \times 100\%$$

In the formula:

- $V_{IN+10\%}$  -- nominal input voltage and add 10% as its upper limit
- $V_{IN-10\%}$  -- nominal input voltage and minus 10% as its lower limit
- $V_{OUT+10\%}$  -- output voltage at full load when input voltage at its upper limit
- $V_{OUT-10\%}$  -- output voltage at full load when input voltage at its lower limit
- $V_{INNOM}$  -- nominal input voltage
- $V_{OUTNOM}$  -- output voltage at full load and nominal input voltage

e.g.: If B0505LS-1W connects a  $25 \Omega$  resistive load, input voltage range will be  $\pm 10\%$  (4.5V~5.5V).

$$V_{IN+10\%} = 5.5\text{V}; V_{IN-10\%} = 4.5\text{V}; V_{INNOM} = 5\text{V}$$

$$V_{OUT+10\%} = 5.32\text{V}; V_{OUT-10\%} = 4.2\text{V}; V_{OUTNOM} = 4.77\text{V}$$

$$\text{Then: } \Delta V_{OUT} = \frac{5.32\text{VDC} - 4.2\text{VDC}}{4.77\text{VDC}} \times 100\% = 23.5\%$$

$$\Delta V_{IN} = \frac{5.5\text{VDC} - 4.5\text{VDC}}{5\text{VDC}} \times 100\% = 20\%$$

$$\text{Line regulation} = \left| \frac{\Delta V_{OUT}}{\Delta V_{IN}} \right| = 1.174$$

# Power Supply Testing

## 3) Load regulation:

Isolated regulated series:

As the input voltage is rated, connect 10% and 100% constant resistance load and then test the values at 10% load and full load. Next, compare the two values with the rated value and calculate the differences.

$$\text{Load regulation} = \frac{V_{b1}(V_{b2}) - V_{bo}}{V_{bo}} \times 100\%$$

$V_{bo}$  -- setting value of output voltage;

$V_{b1}$  -- output voltage at minimum output current;

$V_{b2}$  -- output voltage at nominal output current;

Fixed input, isolated unregulated series:

$$\text{Load regulation} = \frac{V_{OUTNL} - V_{OUTFL}}{V_{OUTFL}} \times 100\%$$

$V_{OUTNL}$  -- output voltage at 10% load

$V_{OUTFL}$  -- output voltage at full load

e.g.: Fixed input product B0505XD-1W offers rated load  $U^2/P = 25 \Omega$ .

At 10% ~ 100% load, they read

$$V_{OUTNL} = 5.29 \text{ V}; V_{OUTFL} = 4.77 \text{ V}$$

$$\text{load regulation} = \frac{5.29\text{VDC} - 4.77\text{VDC}}{4.77\text{VDC}} \times 100\% = 10.9\%$$

## 4) Efficiency:

The ratio between input power and output power at rated input and rated load.

$$\text{Efficiency} = \frac{I_{OUT} \times V_{OUT}}{I_{IN} \times V_{IN}} \times 100\%$$


e.g.: IB1212LS-1W offers 12V rated input and 12.039V output at full load. When current is 83.3mA, input current is 115.0mA.

$$\text{Efficiency} = \frac{0.0833\text{A} \times 12.039\text{V}}{0.1150\text{A} \times 12.000\text{V}} \times 100\% = 73\%$$

## 5) Ripple and noise:

Ripple and noise is the AC component at the DC output, which affects output accuracy, we usually measure ripple and noise with a peak to peak value (mVp-p). The most common method is parallel measurement.

As the figure shows:

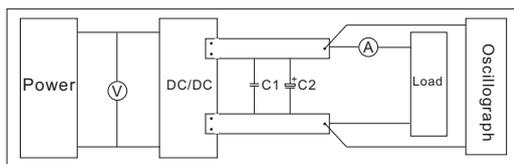


Notes: 1. C1 is a ceramic capacitor.

2. C2 is a capacitor suitable for the fixed input product.

Please refer to datasheet for details. For wide input product, C2 should be 10uF electrolytic capacitor that has a higher withstanding voltage than module's output voltage.

As the DC/DC converter output end/side may contain high-frequency harmonics, and the common mode rejection ratio of most scopes is not so good, it is best to not use the ground wire provided on most probes. Attach the ground sleeve as shown in the figure above.

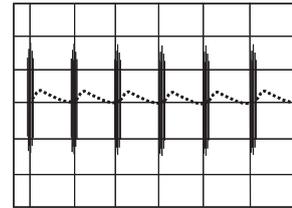

Tall, high frequency spikes are normally noise, and smaller lower frequency plots are generally ripple.

## 6) Start-up time:


Start-up time is the time once the input voltage is present and within the specified range, the time it takes for the output of the converter to rise between 10% and 90% of its nominal value. This is usually tested and specified with a resistive load only. Other factors such as additional output capacitance added by the customer may effect this time.

## 7) Isolation and insulation characters:

Isolation is one of the most important parameters of a DC/DC converter. Depending on the application, isolation are typically between 1KV and 6KV depending on the DC/DC converter series.

Here is isolation circuit drawing.

Isolation equivalent circuit:

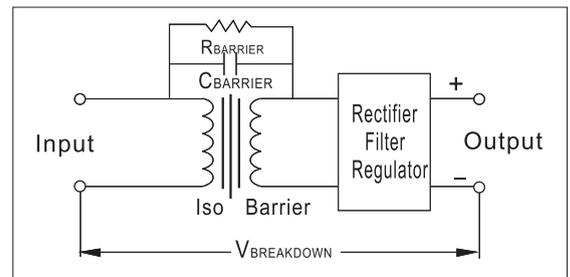

$$I_{LEAKAGE} = \frac{V_{BREAKDOWN}}{R_{BARRIER}} = 2\pi(60\text{Hz})(C_{BARRIER})(240\text{V})$$

$C_{BARRIER}$ : Isolation capacitance; coupled between primary and secondary windings

$R_{BARRIER}$ : Isolation resistance: DC resistance between input and output.

$I_{LEAKAGE}$ : Leakage current; the current as a result of the input/output capacitance.

$V_{BREAKDOWN}$ : Test voltage. It is usually 240VAC/60HZ.

$$Z_f = \frac{1}{j2\pi f C_{IS}} \quad I_L = \frac{V_{test}}{Z_f}$$

$C_{IS}$ : Isolation capacitance  $f$ : frequency  $V_{test}$ : test signal voltage

In general, DC/DC converters are constructed to minimize Isolation Capacitance, and therefore minimize Leakage Current.

For isolation testing,

Isolation, dielectric strength test: test 1 min., input/output (at AC/DC specified peak value)

Insulation resistance test: the value should be above 1GOhm when applying 500VDC from input/output

Note: MORNSUN's G and H series products offer extremely low isolation capacitance (TYP: 10PF) and they are suitable for medical application.

# AC/DC Converter Application Guidelines

## 1. Foreword

The following guidelines should be carefully read prior to converter use. Improper use may result in the risk of electric shock, damaging the converter, or fire.

### 1) Risk of Injury

- A. Do not touch the heat sink or the converter's case To avoid the risk of burns,
- B. Do not touch the input terminals or open the case and touch internal components, which may result in electric shock or burns.
- C. keep hands and face at a distance to avoid potential injury during improper operation, when the converter is in operation.

### 2) Installation Advice

- A. Please make sure the input terminals and signal terminals are properly connected in accordance with the stated datasheet requirements.
- B. Install a slow blow fuse at input of the converter to ensure safe operation and meet safety standard requirements.
- C: Installation and use of AC/DC converters should be handled by a qualified professional.
- D: AC/DC converters should be installed in compliance with certain safety standard in the primary transmission stage of a design.
- E: Please ensure that the input and output of the converter are incorporated into the design out of the reach of the end user. The end product manufacturer should also ensure that the converter is protected from being shorted by any service engineer or any metal filings.
- F: The application circuits and parameters shown are for reference only. All parameters and circuits should be verified before completing the circuit design.
- G: These guidelines are subject to change without notice; please visit our website for details.
- H: It is a normal phenomenon if there is slight noise when the module operates under no-load and light-load conditions.
- I: Please refer to AC/DC Converter Common faults Analysis for other questions.

## 2. Selection guide of AC/DC converter

Firstly confirm the specifications of power supply, select the module according to the required parameters, and determine to use standard module or require customization.

### Step 1: Confirm the type of power supply input.

Check that the input is AC source or DC source; AC source should use AC/DC converters, and DC source should use DC/DC converters.

### Step 2: Select the standard module voltage according to the input voltage range.

### Step 3: Select the power and package type of the product according to the load.

Optional packages: Single in-line (SIP), double in-line (DIP), common chassis mounting, mini-type chassis mounting and DIN-Rail (DIN). LD/LB/LH series (except for LH40, LH60) suffixed with A2 indicates the chassis mounting, and with A4 indicates the Din-Rail mounting. For example, LH15-10B05A2 is in chassis mounting package .

### Step 4: Select the suitable output voltage according to the load type.

The output voltages of MORNSUN products are usually 3.3 V, 5 V, 9 V, 12 V, 15 V, 24 V,  $\pm 5$  V,  $\pm 12$  V and  $\pm 15$  V.

### Step 5: Select the isolation voltage.

The isolation of the module separates the input and output into two isolated circuits (separate ground connection).

In industrial power bus system. Isolation ensures the safety in harsh circumstances (lightning, arc interference), also eliminate ground loops. in hybrid circuits, the noise isolation between sensitive analog circuit and digital circuit can be achieved. In the multi-voltage power supply system, the voltage conversion can be implemented. The isolated voltage of MORNSUN AC/DC converters are 2500VAC, 3000VAC and 4000VAC.

In conclusion, standard converters are suitable for cost-effective, mature technology, lower development resistance and less development time, etc. For high isolation, extra wide voltage input range, high temperature environment, EMC certification, UL certification and other special requirements, it would be better to consult the technicians.

## 3. General AC/DC Converter Applications

### Basic Application Circuit

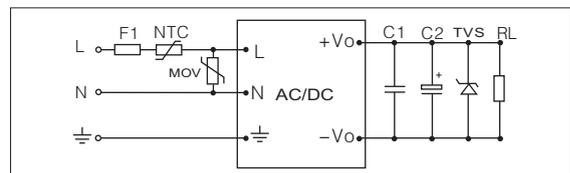


Figure 1. General AC/DC converter applications circuit

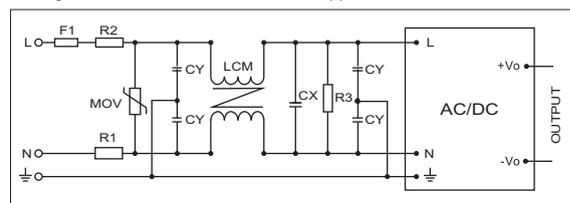


Figure 2. Typical input EMC filtering circuit

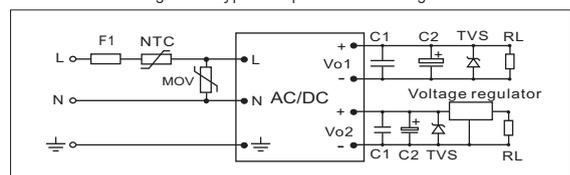


Figure 3. Typical application circuit

# AC/DC Converter Application Guidelines

1)F1: refers to the input fuse. Proper fuse selection should be a safety agency approved, slow blow fuse. Selection of the proper fuse rating is necessary to ensure power converter and system protection (potential failure if the rating is too high) and prevent false fuse blowing (which could happen if the rating is too low). Below is the formula to calculate the proper rating:

$$I = 3 \times V_{o1} \times I_{o1} / \eta / V_{in}(\text{min.})$$

$V_{o1}$  --output voltage;  $I_{o1}$  --output current;  
 $\eta$  --the converter's efficiency;  
 $V_{in}(\text{min.})$  --the minimum input voltage.

- 2) NTC: a thermistor. It is suitable for AC/DC converter modules, and is optional. If the application is sensitive to surge current, a winding resistor at 5~10  $\Omega$  is recommended.
- 3) R1 & R2: 2 $\Omega$ /3W winding resistance is applied to the power modules under 25W, 2 $\Omega$ /5W winding resistance is applied to the power modules more than 25W.; R3: 1M  $\Omega$  /3W winding resistor.
- 4) MOV: dependent resistor, protects the converter from damage of lightning or surge current.
- 5) CX & CY: safety capacitors.
- 6) LCM: common-mode inductor, is recommended to 10mH~30mH.
- 7) C1: a high frequency ceramic capacitor or polyester capacitor, 0.1 $\mu$ F/50V.
- 8) C2: an output filtering high frequency electrolytic capacitor. Output-filtration high-frequency aluminum electrolytic capacitor, please refer to datasheet for details.
- 9) TVS: is recommended to protect back-end circuit in case of the module abnormality.

For dual or triple output converters, the circuit of input side remains the same and the outputs should be considered independently in component selection. The application circuit shown in Figure 1 is typical application circuit. If the place that is strict with EMC, such as electricity or outdoor applications, more filtering measures are needed. Therefore, the product in Figure 2 (for your reference) is suitable for a typical input EMC filtering circuit.

For multi-output converters, the main output is typically a fully regulated output. If the end application requires critical regulation on the auxiliary output, a linear regulator or other regular should be added after the converters. As shown in Figure 3. (Note: MORN SUN partial products have built-in linear regulators, please contact our technical department for details)

## 4. Safety design for application of AC/DC converter

### 1) Marking requirements

The fuse, protection ground terminal and switch shall be marked symbols in accordance with SAFETY REQUIREMENT, and the danger warning signs shall be affixed to the accessible dangerous voltage and energy.

### 2) Material requirements

The L, N and  $\oplus$  wires of input shall be in brown, blue and chartreuse respectively. For the equipment which prevents the electric shock through basic insulation and protection ground terminal (Class I equipment), the ground wire in chartreuse must be grounded well, and the grounding resistance shall be lower than 0.1  $\Omega$ .

### 3) Clearance and Creepage distance

Make sure that in Class I and Class II application environment, the clearance of L and N before fuse must be in accordance with the reinforced insulation requirement of SAFETY REQUIREMENT; and after fuse, it must meet the basic insulation requirement of SAFETY REQUIREMENT.

### 4) Capacitance on the input terminal

If CX capacitance of input terminal is too high, the discharge resistor shall be connected to make sure when the plugs or the connectors disconnected, the retention voltage between L and N input terminal shall drop to less than 37% of the maximum within 1s.

## 5. Common questions

### 1) Grounding – input and output

Input grounding: Normally there are three pins on the input terminal of AC/DC Converter: Live wire L, neutral wire N and protection ground terminal  $\oplus$ ;  $\oplus$  is usually connected to the equipment casing or the ground wire in the power grid. Output grounding: In the actual application, some customers connect the output ground terminal with the protection ground terminal directly, as shown in Fig. 4 below. Such connection may result in abnormal output or damage of the module because of lightning, surge and group pulse, etc., so it is recommended to connect the output ground terminal with the protection ground terminal through a Y capacitor (1000 pF/400 V is normally recommended), as shown in Figure. 1.

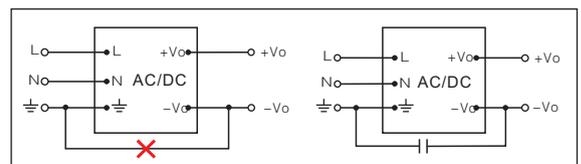


Figure. 1. Connecting method of output and protection grounding

### 2) Surge current

The surge current is classified into the spike current at start time and the current formed by the high surge voltage sensed during operation. For the spike current, we mainly add protective apparatus as thermistor or wire wound resistor on the input terminal to reduce the surge current; for the surge current produced by the high voltage, we mainly use the piezoresistor for protection and to release

# AC/DC Converter Application Guidelines

the energy.

### 3) Leakage current

There are two kinds of leakage currents: 1. the leakage current between the input terminal and the protection ground terminal when the product operates normally; 2. the leakage current between the isolation belts when the product is in the pressure withstanding test.

### 4) AC/DC input


Usually the full-bridge rectifier is used on the input terminal of AC/DC power supply to meet the AC and DC power supply requirements.

### 5) Relations between the Class I, II equipments and the protection ground terminal FG

EN60950 clearly defines the Class I and II equipments: Class I equipment is provided with the basic insulation and a connecting device capable of connecting the conductive part with dangerous voltage to the protection grounding conductor in case of the basic insulation failure. Class I equipment is also equipped with the protection ground terminal FG pin, such as LH-series product. Class II equipment means the equipment which electric shock prevention depends on both the basic insulation and the additional safety protection measure (for example the equipment with dual insulation or enhanced insulation). Such equipment does not rely on the protection grounding or the protection measures of mounting condition. Class II equipment has no protection ground terminal FG pin, such as LS/LD-series product.

### 6) Transient change of input

The transient voltage change of the input power wire may destroy the power converter. If the transient voltage change on the input terminal is higher than the top limit of the input of the module, the protection circuit as shown in fig. 5 must be connected at the input terminal.

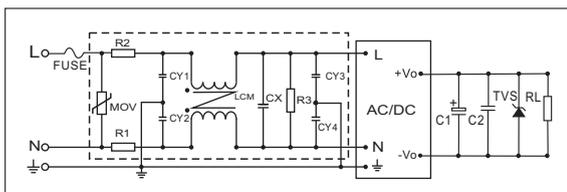

### 7) No-load use of output

For the multi-output product, output voltage may be 20% or more higher than the nominal at no-load. In actual application, it is recommended to ensure the minimum load (10% load).

### 8) Operating temperature

When the product operates in a high temperature

environment, the temperature of its internal components will be much higher than the ambient temperature. In order to ensure the reliable operation of the module, the maximum operating ambient temperature of the conventional product is 70°C, and derating is required when the ambient temperature is 55°C. When the product operates in a low temperature environment, the power derating is also required because of the low-temperature characteristics of internal electrolytic capacitor and other components. Moreover, the output ripple and the noise are higher than that of constant-temperature value. For the specific contents of derating curve, please refer to datasheet for details.

### 9) Voltage marked on product's screen print

The mark on the product's screen print is 100VAC-240VAC. But why it is 85VAC-264VAC on the datasheet? It is mainly because of the consideration of safety certification. During test, the certification authority usually tests the product performance according to the input voltage on the product's screen print  $\pm 10\%$  and  $\pm 15\%$ . So in this industry, the input voltage on the screen print usually is 100VAC-240VAC.

# DC/DC Converter Application Guidelines

## 1. Selection guide of DC/DC Converter

### 1) Confirmation of specifications of power supply module

Firstly confirm the specifications of power supply, select the module according to the required parameters, and determine to use standard module or require customization.

#### Step 1: Select the package size

Sufficient space is required for power module's radiating, which affects the interference of signal acquisition and performances of other circuit components. The volume, cost, and reliability of the modules should be taken into overall consideration.

#### Step 2: Select the isolation voltage.

The isolation of the module separates the input and output into two isolated circuits (separate ground connection). In industrial power bus system, isolation ensures the safety in harsh circumstances (lightning, arc interference), and eliminates ground loops; in hybrid circuits, the noise isolation between sensitive analog circuit and digital circuit can be achieved; in the multi-voltage power supply system, the voltage conversion can be implemented. Selecting appropriate isolation products according to different applications ensures the operation and avoids the budget waste in over-design.

#### Step 3: Confirm the type of power supply input

Check what the input source is AC source or DC source ; AC source should use AC/DC converters, and DC source should use DC/DC converters.

#### Step 4: Confirm the output current

After the load is selected, the output current is basically determined; the magnitude of load current is the key to the determination of power and directly affects the reliability and price of the module. The power converter is preferably applied under 30%-80% power condition; selecting appropriate output current is one of the key factors for successful design, excessively large and small current will result in low reliability and high cost.

In general application, it is to be noted that: if the application is for supplying power to optical coupler and relay or for voltage reference of RS232/485 and CAN (Controller Area Network) buses, light load or no load application may exist, in such case, it is recommended to add appropriate dummy load. In case the load is extremely unstable or the load variation is relatively large, the selection of dummy load shall be within the range of 10%-100%, in order to avoid under-load or over-load application.

Under high temperature condition, the power converters shall be used in derating. Please refer to the Temperature Derating Curve. As for the application under high temperature condition or poor heat dissipation condition, the converter with large volume is preferred; as for the case of long term operation above 70°C, please consult our technicians to select the suitable power converters for the exact operation.

### Step 5: Confirm the input voltage range

1) As for input voltages 3.3V, 5V, 9V, 12V, 15V and 24V with variation range of  $\pm 10\%$ , A, B, D, E, F, G and H series products with unregulated voltage outputs are available. As for input voltages with variation range of  $\pm 5\%$ , IA, IB, IE and IF series products with regulated voltage outputs are available. Others are switching power supplies, linear voltage stabilizers, voltage stabilizing diodes and other power supplies with relatively stable outputs.

2) As for input voltages 5V (4.5-9V), 12V (9-18V), 24V (18-36V) and 48V (36-75V) with variation range of 2:1, WR and VR series products are available. As for input voltages of 24V (9-36V), 48V (18-75V) and 110V (40-160V) with variation range of 4:1, PW and UR series products are available. For example, in the cases of 24V industrial bus power supply, 48V communication bus power supply, 110V railway power supply, 220V transformer rectifier output and various types of storage battery, accumulator, lithium battery, dry battery, remote transmission, etc. with large output voltage variations, PW and UR series modules with wide voltage outputs are available. As for the output powers above 3W, it is recommended to select VR or UR input series power converters in order to improve the overall efficiency.

### Step 6: Confirm the load type

1) The output voltage depends on the type of load circuit, for example: in the cases of ordinary digital circuits, amplified direct current or low-frequency signal operational amplifiers, RS232/485 and CAN buses, etc. which without high requirements on accuracy of power supplies, the converters with unregulated voltage outputs are available. (e.g. A, B, D, E, F, G and H series modules). As for the sensors, high-accuracy operational amplifiers, A/D and D/A chips and other devices which are more sensitive to the accuracy and ripple of power supplies, the products with regulated voltage outputs (e.g. IA, IB, IE and IF series products, or VR, WR, PW and UR series products) are available.

2) In the case where both the cost and efficiency shall be taken into consideration, combined use of unregulated voltage output converters (e.g. A, B, D, E, F, G and H series modules) and linear regulator can be considered; when the load has positive/negative voltage or multi-voltage supply demand, the module with positive/negative voltage or using dual-circuit/multi-circuit outputs can be considered; the number of circuits shall be minimized; in the application, the circuit with large output power and high accuracy requirement shall be used as main output, and the secondary voltage accuracy requirement shall be determined, in order to allow the converter design to meet the requirements more

reliably.

3) The common specifications of output voltage are 3.3V, 5V, 9V, 12V, 15V, 24V,  $\pm 5V$ ,  $\pm 12V$  and  $\pm 15V$ , etc.

4) Excessively high requirements on output accuracy and ripple may cause significant rise of the cost of converters. In conclusion, standard converters are suitable for cost-effective, mature technology, lower development resistance and less development time, etc. For high isolation, extra wide voltage input range, high temperature environment, EMC certification, UL certification and other special requirements, it would be better to consult the technicians.

## 2) System Power Distribution Design

The design of system power distribution usually has to be optimized for several times according to product characteristics and circuit demands. Accurate measurement of actual circuit operation parameter and environment change range is helpful for us to select the most suitable power converter.

### Step 1: External factors

Ambient temperature has certain effects on power converters and the external components. In the application, the power converters may be in an environment with cyclic changes of high temperature, low temperature or high and low temperatures (e.g. engine room, cabin, etc.). Therefore, we shall have a detailed understanding of the changes of relevant parameters of power converters during changes of environmental conditions, in order to ensure that the requirements of power converters are satisfied in actual environment. It is to be noted the ambient temperature for operation of power converters is not the air temperature at that time but the spatial temperature in the casing of equipment. As there are many heating devices, the temperature in the casing is usually higher than the air temperature. The temperature range is required to be 0~70°C for commercial products, -40~85°C for industrial products, -40~105°C for vehicle onboard equipment, -55~85°C for field operation equipment and -55~125°C for military domain. Sufficient margin shall be considered in design, especially for the converter which is greatly derated in high temperature. And it is preferred to select the electrolytic capacitor with better high/low temperature characteristics. Under high temperature condition, the withstanding voltage of capacitor will reduce significantly, and the capacitor shall be used correctly according to its Specification Manual.

In the environment with interferences such as electric arc, electrostatic discharge, unstabilized alternating current grid, starting switch, relay and lightning stroke, the input voltage and current may far exceed the withstanding capacity

of module, causing permanent damage of module and breakdown of load circuit. In this case, protective circuit shall be provided to ensure the safe operation of power supply.

Transmission distance also has effects on the power supply of system, so following points shall be paid attention to during the model selection:

1) Small temperature difference and small interference, non-isolation or small power converter is generally used in the case of short indoor wire,

2) The transmission loss shall be accurately calculated, and the isolation power converter with wide voltage input and sufficient power are available, in addition to considering the lightning-protection isolation, in the case of extramural remote transmission.

3) The power converter must have enough power to ensure its normal operation in the case of excessively long transmission distance and relatively large loss. Considering of the starting current of converter, it is generally recommended that the current provided by power supply shall be 1.3-1.6 times of the starting current of converter.

4) Connect a large capacitor to the pins of the power converter (higher capacitance is suggested) to improve the starting performance.

### Step 2: Operating environment

All the power conversion products will have a certain power consumption convert into their own heat energy which make them emit heat and affects the ambient environment by temperature rise, resulting in data interference (thermo-sensitive sensing devices) and device performance reduction, and even causes short circuit and fire. Therefore, there must be sufficient air flow space, or increasing heat radiating area in the layout to reduce the temperature rise to ensure the safety.

As the switching power supply uses switch technology, thus, its switch oscillating circuit and internal magnetic element will produce electromagnetic interference and pollution to surrounding devices in conduction and radiation mode.

Electromagnetic interference (EMI) is the pollution to environment caused by electromagnetic energies transmitted by electromagnetic radiation and conducted by signal wires and power wires. The electromagnetic interference can't be completely eliminated, but certain methods can be adopted to reduce it to safe level in order to comply with electromagnetic compatibility.

### Step 3: Circuit interference

Unreasonable ground connection and power supply layouts always cause instability, high noise and other bad phenomena of system.

In many applications, the digital circuit and analog circuit share the same power supply; in this kind of design, it is very important that the analog circuit and digital circuit are used


# DC/DC Converter Application Guidelines

separately or the power supply and ground loop are completely isolated, in order to avoid the interferences with sensitive analog circuit caused by digital DC level changes and logical transient processes. At the same time in high speed or dynamic analog circuit and digital circuit, when the power is distributed to the loads through relatively long line, the distributed resistance and inductance of power distribution wire will become obvious and easy to cause noise spikes due to rapid changes of load. In this case, the loads need to be decoupled and the resonances caused by series impedances and distribution parameters on the line shall be eliminated.


## 2. Additional converter applications

### 1) DC/DC converters used in series

Isolated DC/DC converters allow the connections of their outputs in series to create higher voltages if necessary. Please refer to below figure for proper series connection.

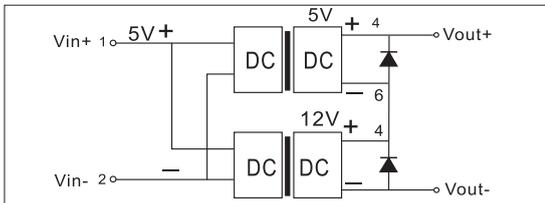

Converter 1 is 5Vout, and Converter 2 is 12Vout. As you can see a unconventional 17VDC voltage can be created by applying the 5V and 12V converters in series. Be careful not to exceed the rated current either of the converters, normally the ripple voltages of two modules will not be synchronized while operation in series results in additional ripples and louder output noise. More filtering measures shall be taken in application. In the figure the output of each module is connected to a back biased diode in parallel (generally Schottky diode with voltage drop down to approximately 0.3V is used as excessive voltage drop may cause damage to the products) to prevent reverse voltage being applied to the other. We can get high output voltage through the dual output products, the following figure shows 10V output.

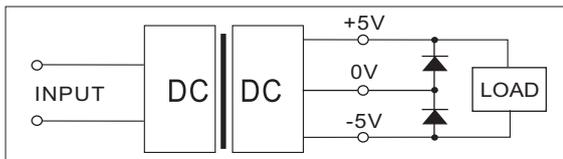


### 2) DC/DC converters connected in parallel

Redundant design can improve the system reliability. MOSFET of the time, engineers connect several same converters in parallel. And if one of the converters fails, the others could operate instead. However, connecting the converters in parallel to improve the efficiency is not advisable, because the output voltage of two converters can

not be exactly equal, and the converter with higher output voltage would provide all load current. In addition, suppose the output voltage of the two converters is set to the same value, the different output impedance, temperature drift and time drift would cause the unbalance of load current and lead to the damage of one of the converters resulted form over load.

Redundant design:


#### 1) high voltage, low current output converter

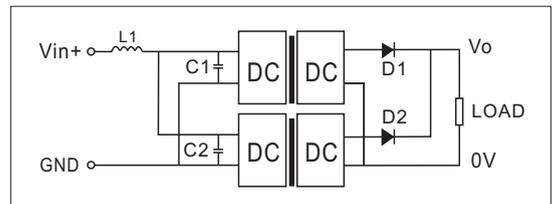

Low voltage drop Schottky diode can avoid that one of the converters starts ahead and cause inverse voltage to other convert. At the same time, the withstand voltage of the diode should be higher than the output voltage. This solution will cause extra ripple and noise, thus it needs to connect an external capacitor or filter circuit to reduce the ripple and noise.


When multiple converters are connected to a same input end and the output is connected to different load, the converters might produce a reflect ripple to the input end and lead to an exception of preceding stage power supply. Therefore, it is necessary to connect a  $\pi$ -type filter formed by common mode choke to avoid the ripple. The parameters can be selected based on the customer's system (usually about 0.3mH).

#### 2) Low voltage, large current output converter

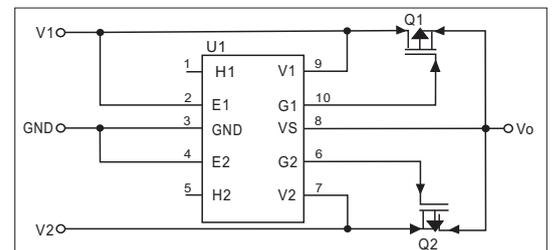

As the redundant design of diode produces high power consumption, it is not applicable for low voltage and large current situation. Therefore, we may use high power MOSFET and chip as the alternative solution. The MOSFET lowers the voltage drop and reduces the device loss at large current, which ensures that the converter operates effectively.

#### 3) Single $\pm$ output, parallel converter

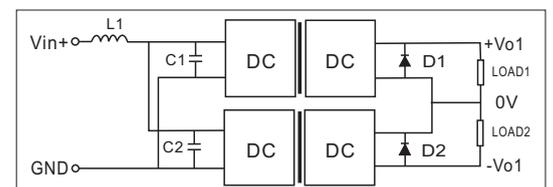


# DC/DC Converter Application Guidelines

In practical application, if the load difference between the primary output and secondary output is significant, the voltage accuracy will be out of limits and leads to application anomaly. Selecting two converters according to the actual load is advisable (please refer to the diagram). If multiple converters share the same power supply, it is recommended to connect a LC filter circuit at each input ends of the converters in order to avoid the reflect ripple.

### 3) Reverse voltage protection


The diagram shows the reverse voltage protection circuit. When connecting a negative voltage power supply (e.g. -48VDC communication power supply), the "0V" is connected to the "Vin+" of the converter; the "-48V" is connected to "GND".

Positive-going electric potential difference of the input end ensures the normal operation of the converter. In order to avoid the converter damage from mis-connecting the input voltage, it is recommended to apply reverse voltage protection. Simply, connecting a positive-going diode at the input terminal. If the voltage is inversely connected, the diode will be not conducted and protect the converter. The lower voltage drop of diode ensures fewer effects to the application efficiency. In addition, the backward voltage of diode can tolerate must be higher (twice recommended) than power supply voltage.

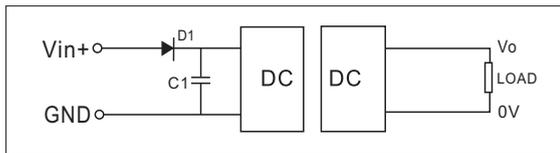

### 4) Input under voltage protection

When the DC/DC converter is sharing the same power source with other circuits, a large input voltage drop caused by external circuits or over load may lead to an input voltage that is below the minimum input voltage specified by the converter. So it is recommended to adopt an under voltage protection circuit to cut off the DC input when the input voltage drops below the minimum specified for the converter.

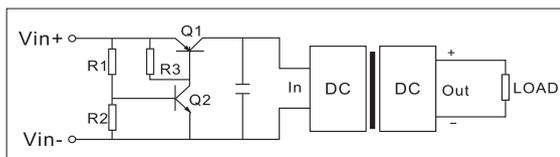

Low voltage turn-off circuit


Where R1,R2 set as low voltage switching limit, PNP transistor can be used, or a p-channel MOSFET. Please contact our sales department.

Note: For low voltage input products, the above circuit will produce a 0.7V voltage drop.

### 5) Output short circuit protection

Most unregulated DC/DC converters with RCC open loop

circuit have no short-circuit protection. It is recommended the following circuit to implement short circuit protection.

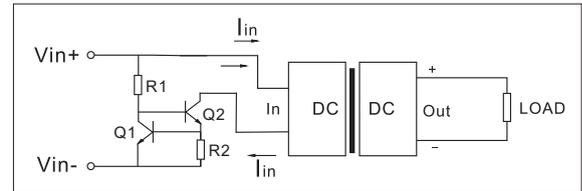

$$R2 = 0.6V / I_{in} \text{ (rated input current)}$$

### 6) Over current and over voltage protection

The permitted input voltage and input current is restricted to be within the range specified in the datasheet to prevent damage to the DC/DC converter. Here are some techniques to add the additional over voltage protection and over current protection on a standard DC/DC converter. As the figure shown below:

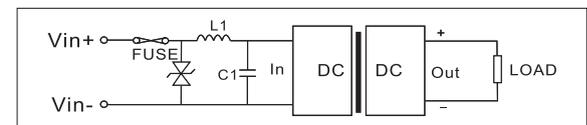


Figure 1: instant over voltage and over current protection circuit

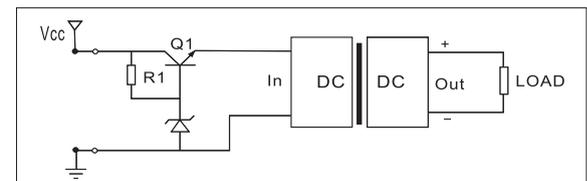


Figure 2: Continuous over voltage protection circuit

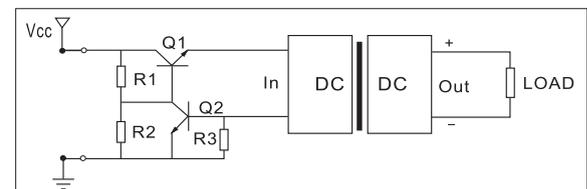


Figure 3: Continuous over current protection circuit

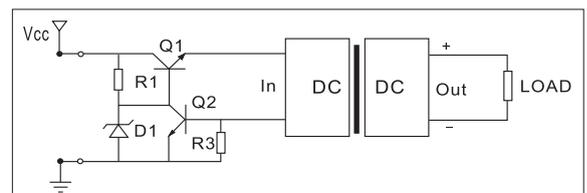



Figure 4: Continuous over voltage and over current protection circuit

### 7) Input and output filtering circuit

Most MORNSUN converters do not require additional components for filtering, etc. However, if further noise and ripple voltage reduction are required, here are some techniques. Ceramic capacitor has better filtering effects, which is suitable for the application that the frequency is higher than 100KHz.

# DC/DC Converter Application Guidelines

For the product without over-current protection, it is not recommended to use tantalum capacitor as filtering capacitor. Tantalum capacitor features low equivalent series resistance and sleep mode, therefore, when the converter starts, the instant large current shock will damage the product. MORN SUN fixed input, unregulated output converters are not suggested to connect tantalum capacitor.

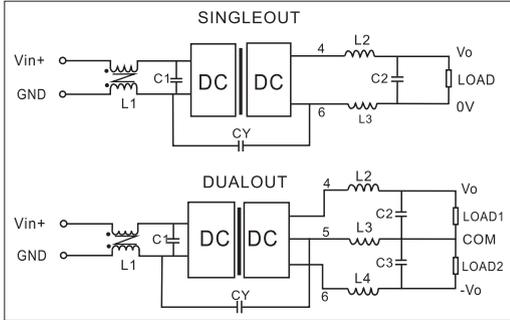

L2/L3/L4, C2/C3: forming the LC filter network to reduce the input ripple (the parameters of the devices are based on the ripple, but they can not exceed the maximum capacitive load)

L1, CY: L1 is the common mode choke to restrain the common mode interferences; Y1 is the 100-1000pF Y capacitor.

For some devices of filter circuit, the frequency selected should be 1/10 of the switching frequency of the converter (refer to the formula).


$$f_C = \frac{1}{2 \pi \sqrt{L C}}$$

There are differences in the results because of the application design and load condition, thus the final parameters should be adjusted according to the field application. When selecting the parameters of filtering capacitor, it can not exceed the maximum capacitive load referring to the datasheet. And the maximum capacitive load is for the backend of the whole power supply, It is not just connected at end of the power supply. For example, the regulator chip is powered by the converter and connected to a 10uF capacitor, which is included in the capacitive load.

## 8) Electromagnetic compatibility

According to IEC 61000-6-X, the input terminal of DC/DC Converter should meet the corresponding EMC requirements when it connects to DC distribution network or supplies power in long distance. Here is a typical application circuit of EMC filter as required for MORN SUN modules. ① is used for EMS protection and ② for EMI filter. More details please refer to datasheet.

And please note that EMC performance relies on not only the modules but also circuit design, PCB layout and structure.

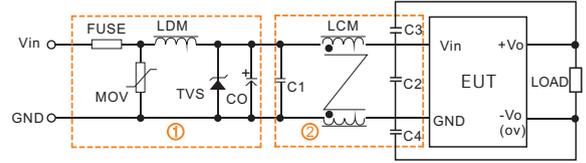


## 9) Capacitive load

Generally the switching power supply has limit of maximum capacitive load, it is recommended to connect an external electrolytic capacitor at the output end. However, the excess capacitance and low ESR (Equivalent Series Resistance) will cause the operating instability and starting failure of the converter (please refer to the datasheet for the External-connecting Capacitance List). Selecting the capacitor according to field application ensures the best performance and efficiency (tantalum capacitor is not recommended).

## 10) Output low load and overload protection


### ① Low load prevention circuit

Most isolated DC/DC converters have minimum load requirement to guarantee proper operation and regulation. Typically, this it is 10% (non-isolated series can stand continuous unload). The output voltage will increase above stated spec for unregulated, For example, when converter is supplying power to a relay, MOSFET or IC of low power consumption (such as 485), it is recommended to guarantee a 10% load under worst case conditions. As the figure shows:

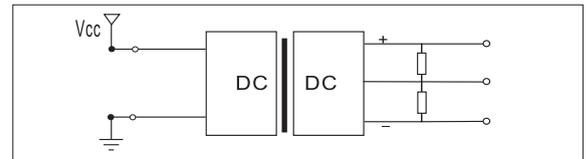

### ② Overload prevention circuit


Though some current can be limited by a filter, when overload and/or short circuit conditions occur, a high current can cause damage to DC/DC converters. It is recommended that one installs a slow blow type fuse of rating 3 times max input current on the input as shown. Contact factory for details.

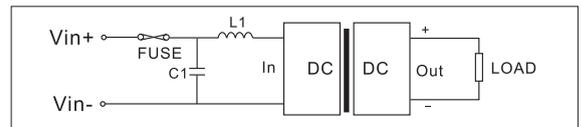

Simple overload protection

(1) It is recommended to add a fuse to the input terminal, which has the tolerance of 2-3 times of the input current, so as to achieve protection in very short time. Auto-recovery fuse can also be used, but it is relatively slow.

# DC/DC Converter Application Guidelines

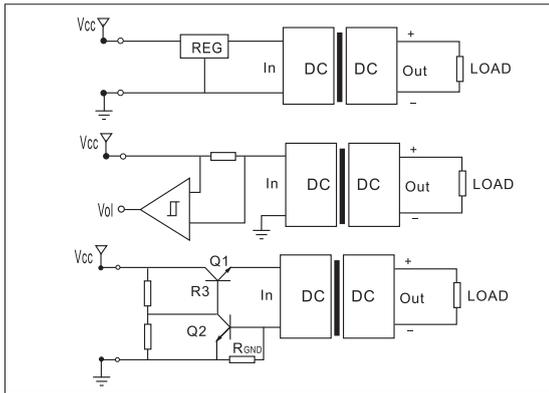

Input over current protection

- (2) A circuit breaker can be used.
- (3) Overload is avoided by limiting the input current shown as above:
  - A: Utilize a pre-regulator to limit the input current, but the overall efficiency will be reduced.
  - B: A series resistor network may be placed before the converter to limit current, but in all but a few cases, this is usually impractical.
  - C: To limit input current by setting  $R_{GND}$ ,  $0.7V = R_{GND} * I_{LIMIT}$ .

### 3) Remote transmission

When the power source is long-distance transmitted via cable, it will bring more ripple and electromagnetic interferences than PCB circuit. Using isolation modules at the two ends of the cable can eliminate interferences of the MOSFET by common-mode signal. In outdoor environments (high mountain or reservoir), the over voltage caused by lightning will damage the modules and even lead to end devices explosion, therefore, the lightning protections should be higher than level 2. For long-distance transmission, it is best to use high isolation voltage and low current modules to reduce the losses and interferences. At the receiving end, the losses and interferences cause the voltage reduction and instability. Thus, it is recommended to use wide-input modules to ensure the sufficient input power and avoid starting failure.

### 11) Special function pin explanation

#### ① Output voltage trimming range

Through adding a resistor at the TRIM terminal, the user can adjust the output voltage  $\pm 10\%$  around its rated value. The total output power of the converter should be within its maximum specified one.

Figure 1 shows how to connect the external trim resistors. If only to adjust to higher (or lower) voltage, the resistor could be connected only between TRIM terminal and negative output (or positive output). The general rules are, to increase output voltage, adding resistor between TRIM terminal and negative output is all that is needed; to decrease output voltage, then adding resistor between TRIM terminal and positive output is all that is needed. If TRIM is not needed, just leave it open circuit.


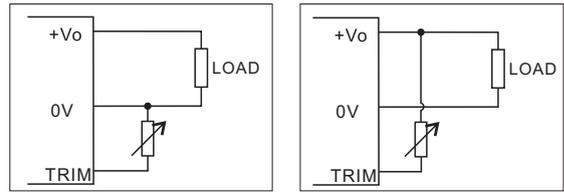


Figure 1: How to connect resistors for trimming

#### ② Remote compensation (Sense Pin)

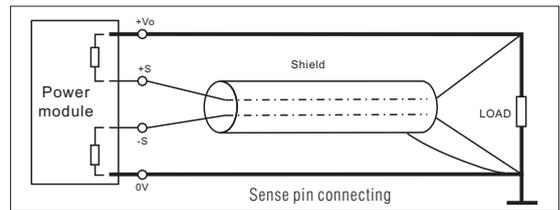

In remote transmission, remote voltage compensation can raise the input voltage to achieve work load. The +SENSE and -SENSE remote compensation pins transmit the input voltage for the remote load, and customers can use wires for remote connecting according to the applications. However, the long wires will cause large EMI. Therefore, in practical application, it is recommended to shield the wires or use twisted-pair wires for connecting. (As shown in the figure)

#### ③ Remote on/off control

Remote ON/OFF control refers to the turning on or off the converter by external means. Remote on/off control pin is usually called CTL terminal, CNT terminal or REM terminal. There're two standard remote control models. Positive Logic: CTL terminal connected directly to -VIN, output OFF; CTL terminal open or connected to up level (TTL High) output ON. Negative Logic: CTL terminal connected directly to -VIN, output ON; CTL terminal open, output OFF.

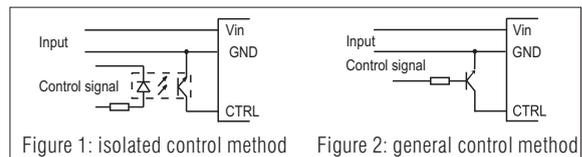


Figure 1: isolated control method      Figure 2: general control method

## 3. Common questions

In special applications, isolated control method is required. Please refer to fig. 1.

### 1) Can the module support hot plug?

Generally speaking, "hot plug" is to plug the power supply module into or out of the system directly without switching off the power supply. Hot plug is not allowed when the module is in operation. As a huge current and voltage spike will be generated at the moment of hot plug, and it may be dozens of times of the input voltage and current of module, which may damage the module in severe conditions.

# DC/DC Converter Application Guidelines

## 2) Can the module be applied at no-load and light-load conditions?

The converters can be applied at no-load or light-load conditions, but the conversion efficiency are relatively low. When the product operates at no-load, the loop is unstable. Thus, oscillations may occur and some parameters may not meet the values in datasheet. To ensure reliability, applications at no-load or light-load conditions shall be avoided. The minimum operating output current of the module shall be no less than 10% of rated current (minimum 5% load for products suffixed with R2 ). It is recommended that the module shall be applied at 30-80% load conditions or the module with smaller power shall be selected and applied.

## 3) Possible causes for poor starting of module

Cause 1: in the actual application, if the capacitive load exceeds the maximum capacitive load in datasheet and the input capacitance is too large, a very large starting current will be required at start-up time and may cause poor starting of the module; it is recommended to reduce the capacitance connected to output terminal or provide a buffer circuit at output terminal to improve the module's capability of carrying the capacitive load.

Cause 2: as limited by the maximum starting current of intrinsic safety power supply, the maximum power provided by power supply cannot meet the starting power requirement of module (relatively large starting power is required). It is recommended to select the module with small starting current or connect a small resistance or induction in series at input terminal of converter to reduce the starting current.

Cause 3: the winding of inductive load (generally the motor winding) fails to form induced electromotive force at the moment of starting, and only the internal resistance of winding is operating in the whole circuit. As the internal resistance of winding is very small (generally  $m\Omega \sim \Omega$  level), the current generated at start-up time will be very large and exceed the over-current protection point of module, causing protection phenomenon and poor starting of module. As for the module with small power, it is recommended to connect a small resistance in series at the output terminal or select a power converter with larger power.


## 4) Will the input terminal and output terminal of module be affected when a tantalum capacitor is connected?

In the application of module, it is recommended to use ceramic capacitor or electrolytic capacitor at input and output terminal for the filtering circuit, rather than tantalum capacitor. On one hand, tantalum capacitor with poor surge protection is quite likely to breakdown and cause short circuit due to relatively large instantaneous current or a very high surge voltage generated at start-up time. On the other hand, the withstanding voltage of tantalum capacitor will be reduced in high temperature environment.

# Signal Conditioning Module Application Notes

## The basic composition

Signal conditioning module is used to isolate and amplify the analog signal according to certain proportion. During this progress, the distortion of output signal must be under control, and the parameters on linearity, precision, bandwidth and isolation voltage should all meet the operation requirements. Measured objects and data collection system must be isolated to enhance the common-mode rejection ratio and to protect the safety of electronic facilities and that of the operators as well. MORNSUN isolation amplifier applies the technology of magnetolectricity isolation. The figure is as follows:

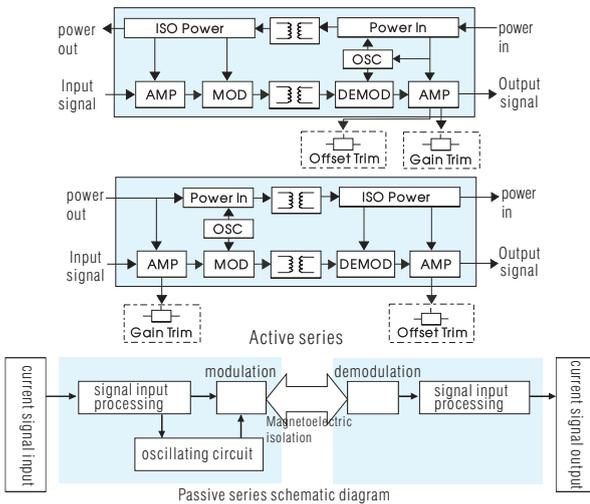

MORNSUN Isolation amplifier module pins functions is as follows: (Take T\_P series as an example):


Footprint			
Pin	Function	Pin	Function
1(Sout-)	Signal output-	13(Pout-)	Distribution output-
2(Iout+)	Current output+	14(Pout+)	Distribution output+
3(Vout+)	Voltage output+	15(Pgnd)	Distribution output GND
11(Sin+)	Signal input+	23(Pin+)	Power supply+
12(Sin-)	Signal input-	24(Pin-)	Power supply-

Remark:

This pins functions are available to DIP24/SMD24 general series, SIP16/DIP16/SMD16 small size series is different from this. The actual functions are subject to technical manual.

### 1. Power supply


Pin 23 is a positive electrode of power supply and pin 24 is a negative one with  $\pm 5\%$  voltage precision. The actual voltage should be within  $\pm 105\%$  nominal voltage. Extremely low supply voltage will not damage the isolation amplifier module but cannot ensure the driving capacity. If within  $115\%$  nominal voltage, the module could work normally but cannot ensure long-term stability. If over  $115\%$  nominal voltage, the internal components may be damaged. Please note that the polar of input signal should have reverse voltage protection to avoid damaging components. It is recommended to connect a TVS at the input terminal.

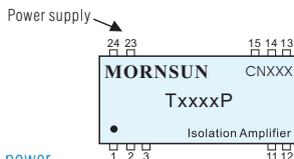

### 2. Isolation power

Pin 13 is a positive electrode of isolation power output, and pin 14 is a negative one. MORNSUN isolation power output offer 25mA output current, suitable to the power supply of input sensor or front processing circuit. Isolation power output can also be connected with current loop to meet the requirement of two-wire translator. The output of this isolation power is non-regulated. No need to connect external capacitor if there is no highly

requirement of isolation power output. If the front circuit requires regulation and low ripple, please connect an external LDO or three-port regulator and the external capacitance(within  $4.7\mu\text{F}$ ). Besides, the specification of isolated output must match the power specification of instruments to avoid the damage to the field instruments.

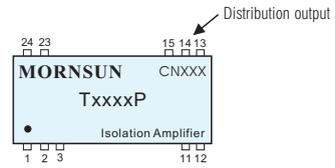


### 3. Signal input

Pin 11 is a positive electrode of input signal, Pin 12 is a negative one.


#### 1) The actual signal input range within the nominal range

Here is the connection. S is voltage signal or current signal source, which can access the input signal directly.

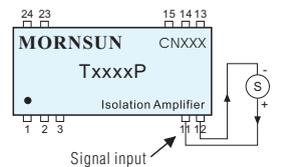


#### 2) The actual input signal range beyond the nominal range

a. The solution of high voltage signal source is as below:  $S_v$  is high voltage signal source, which can access the input signal end by a divide resistance, because the input independence is very high(larger than  $10\text{M}\Omega$ ), so the connection will not effect the module's input signal.

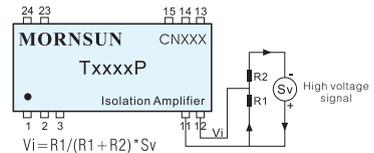

$$V_i = R_1 / (R_1 + R_2) * S_v$$


b. The solution of large current signal source is as below:  $S_i$  is current signal source, which can series a shunt resistance  $R_i$  in the circuit to sampling mV signal, then amplify it to standard industrial signal through our module.

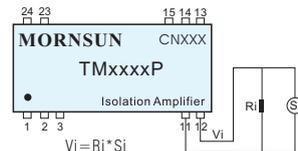

$$V_i = R_i * S_i$$

### 4. Signal output


Pin 1 is a negative electrode of output signal. Pin 2 is a positive output of constant current signal. Pin 3 is a positive output of voltage signal. Usually, pin 2 offer a constant current signal and the load capacity is less than  $500\Omega$ . If the load is less than  $500\Omega$ , the correspondent output only depends on the input signal, not the load. This characteristic urges that constant current signal is suitable for remote transmission. Only connecting a sampling resistance with constant current loop at the remote terminal, the voltage of the sampling resistance is linear to input signal.

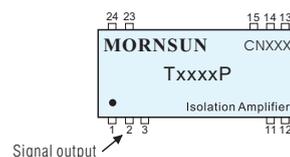

# Signal Conditioning Module Application Notes


## a. Current signal output

As below, the current output is from pin 2, and pin 3 is no connection.

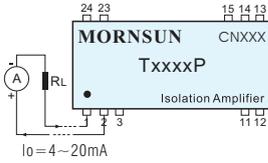

## b. Voltage signal output


As below, voltage output is from the pin 3, and pin 2 is no connection. When the voltage output is maximum, load capacity is higher than 1KΩ.

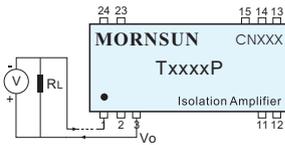

## Typical application

### 1. Signal acquisition: measurement and control instruments


In most applications of automatic measurement and control instruments, transmitters are widely used to convert the signals, which can't be measured directly by MCU, into electrical analog signal which can be processed by MCU easily, such as current transmitter, press transmitter, location transmitter, speed transmitter, temperature transmitter, flow rate transmitter, humidity transmitter, acousto-optic transmitter and image identification transmitter, etc. The figure is as follows:

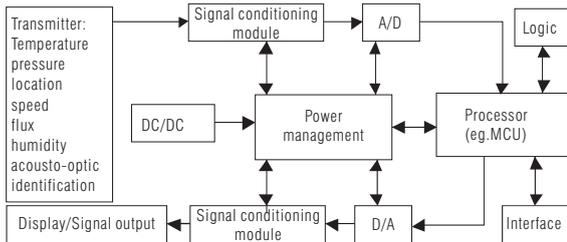

Typical application structure of signal conditioning module

Example: Specific application of the signal conditioning module based on embedded metro stray current monitoring instrument. Most metro traction power supply is DC power supply. When DC large current flows along the rail on the ground, leakage current flows to the ground and to all kinds of metal on the ground, and then back to the power system. This leakage current is called stray current, which erodes the metal under the ground. Serious erosion of stray current and natural corrosion will lead to the accelerating of subway electrochemical corrosion. So it's necessary to monitor stray current. Please refer to CJJ49-92 standard for details.

Here is a recommended solution circuit:

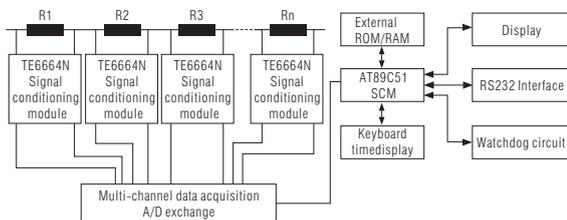


Application of signal conditioning module on metro stray current monitoring

### 2. Isolating anti-interference: the system of coulometric monitoring

In modern electric measurement and controlling, usually, low-voltage instrument is used to measure and control high-voltage, heavy current and something like analog signals. If there is no isolation between the digital signal and those analog signals, high-voltage and heavy current will easily damage modules and even cause accidents in serious situation.

Example: (1) In the industrial factory, in order to guarantee safety and to get the optimal signal quality in industrial factory, the measurement and control of signal always call for the electrical isolation of it.

(2) In the areas of high voltage or the one that has the danger of explosion, there are different ground potentials. If the plant areas are far away from the central control room, the high common-mode voltage between them will not allow the measuring signal being connected directly to the equipment in the factory. Under such circumstances, electrical isolation transmit signal is definitely necessary. The following figure shows the current monitoring of motor to prevent the operation error of the motor.

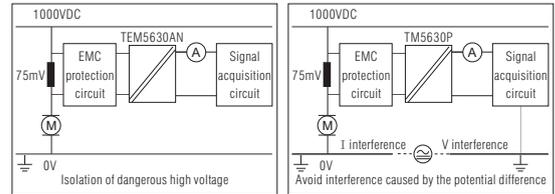


Application of signal conditioning module on coulometric monitoring system

signal conditioning module is mainly used to control the transmit of the signal under the situation of high common-mode voltage and isolate the measured objects and data collection system so as to improve the common-mode voltage ratio and protect the safety of electronic facility and that of the operator as well. It is widely used in the fields of measuring equipment, medical electronic equipment and power equipment applications.

### 3. Signal Conversion & Long Distance Transmission: PLC & DCS System

In PLC & DCS system, various non-standard signal gathered by sensors and amplifiers of front need to be converted into standard signal, and sometimes conversion among standard signal is necessary for interface matching. There is attenuation in the transmission of voltage signal but not in the constant current output. It is recommended to convert the voltage signal into current for signal remote transmission. In case, there is interference of potential difference between the grounds of sensors and transmitters, and the grounds of control room where PLC and DCS system is, external interference signal will be coupled into the signal through transmission circuits and lead to unstable signal output. Isolation amplifiers are recommended to isolate and convert signals to reduce interferences. Here shows the typical application of isolation amplifier in PLC or DCS system:

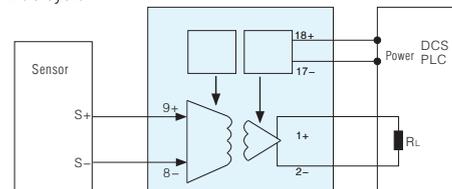

Application of signal conditioning module on DCS & PLS system

Besides signal acquisition, isolation anti-interference, signal conversion and remote transmission, signal conditioning module is suitable for signal interface matching, load capacity increase, signal distribution output, more reliable regional isolation and differential signal input applications.

## Distributions & Channels



mornsun website

### **MORNSUN Power**

No.5, Kehui St.1, Kehui Development Center, Science Ave.,  
Guangzhou Science City, huangpu District, Guangzhou

Tel: 020-38601850

Fax: 020-38601272

Email: [sales@mornsun.cn](mailto:sales@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)

### **MORNSUN America,LLC**

Add: PO BOX 107 Maynard ,MA 01754

Tel: +1 (978) 567 9610 / 293 3923

Email: [sales@mornsunamerica.com](mailto:sales@mornsunamerica.com)

[www.mornsunamerica.com](http://www.mornsunamerica.com)

### **Mornsun Power GmbH**

Add: Mayerbacherstraße 32 85737 Ismaning

Tel: +49 (0) 89/693 350 20

Email: [info@mornsunpower.de](mailto:info@mornsunpower.de)

[www.mornsunpower.de](http://www.mornsunpower.de)