



## CESOIA MARILYN

MARILYN SHEAR


CISAILLE MARILYN

CIZALLA PARA HIERRO MARILYN

METALLSCHERE MARILYN

TESOURA PARA FERRO

model	(2)	(1)	(2)	ton	model	(2)	(1)	(2)	ton
CS 03R	1,5	2	3	3,5	CS 03R	3,5	4	5	5,5
CS 05R	2,5	3	4	4,5	CS 05R	4,5	5	8	9
CS 07RS	3,5	4	7	8	CS 07RS	7	8	12	14
CS 12RS	6	7	10	12	CS 12RS	11	12	18	20
CS 20RS	9	10	16	18	CS 20RS	17	18	23	25
CS 25RS	15	16	20	22	CS 25RS	22	23	30	32
CS 30RS	19	20	25	27	CS 30RS	29	30	38	41
CS 40RS	24	25	30	32	CS 40RS	39	40	50	53
CS 55RS	29	30	40	43	CS 55RS	53	55	70	73
CS 70RS	43	45	55	60	CS 70RS	73	75	100	105
CS 90RS	60	70	90	100	CS 90RS	105	120	150	165
CS 160RS	80	90	140	150	CS 160RS	125	140	210	225
CS 200RS	125	140	190	210	CS 200RS	180	200	280	310

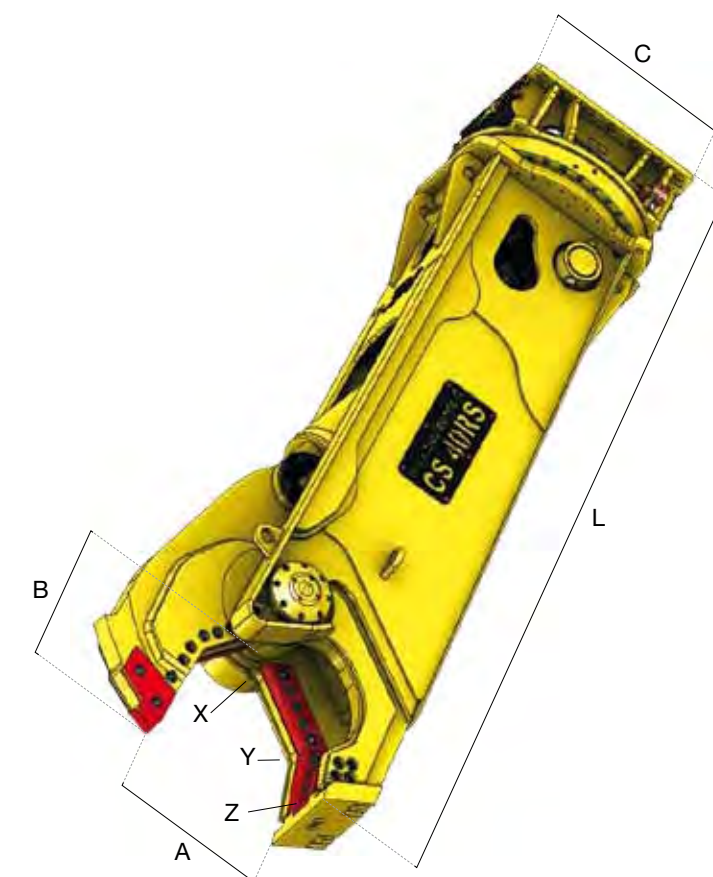

[www.aplegroup.com](http://www.aplegroup.com)

(1) Accoppiamento escavatore-attrezzatura ottimale / Optimum excavator-equipment combination  
 Couplage pelle-équipement optimale / Acoplamiento excavadora-implemento optimal  
 Optimale Bagger-Ausrüstung Kombination / Combinação máquina-implemento ideal

(2) Accoppiamento escavatore-attrezzatura possibile / Possible excavator-equipment combination  
 Couplage pelle-équipement possible / Acoplamiento excavadora-implemento posible  
 Mögliche Bagger-Ausrüstung Kombination / Combinação máquina-implemento possível

**NEW**

**NEW**



		CS 03R	CS 05R	CS 07RS	CS 12RS	CS 20RS	CS 25RS
kg	kg.	300	450	875	1180	1650	2350
A	mm.	265	340	405	475	535	570
B	mm.	230	320	370	385	445	505
C	mm.	380	460	570	570	715	715
L	mm.	1330	1725	2180	2300	2660	2950
X	t.	95	125	215	225	250	420
Y	t.	45	50	90	95	110	180
Z	t.	25	30	50	55	60	100
⌀	bar	220	250	310	310	310	310
⌀	l/min.	80 / 100	80 / 150	100 / 150	150 / 250	180 / 250	200 / 300
⌀	max bar	120	120	140	140	140	140
⌀	max l/min.	5	10	10	10	10	10
		/	/	/	/	/	/

		CS 30RS	CS 40RS	CS 55RS	CS 70RS	CS 90RS	CS 160RS	CS 200RS
kg	kg.	2900	4030	5900	7180	10200	16500	19160
A	mm.	615	660	780	845	920	1100	1180
B	mm.	545	610	690	710	780	1080	1130
C	mm.	715	865	1000	1100	1200	1325	1750
L	mm.	3130	3420	3905	4190	4400	5440	5580
X	t.	550	600	700	815	1075	1495	1540
Y	t.	230	270	290	375	480	610	690
Z	t.	125	145	160	205	265	330	350
⌀	bar	340	340	340	340	340	340	340
⌀	l/min.	200 / 300	300 / 400	400 / 500	450 / 600	500 / 800	800 / 1000	900 / 1200
⌀	max bar	140	140	140	140	140	250	140
⌀	max l/min.	10	10	30	30	50	50	50
		/	/	√	√	√	√	√