



FRANTUMATORE GIREVOLE

ROTATING PULVERIZER
 BROYEUR ROTATIF
 DEMOLEDOR ROTATIVO
 DREHBARE PULVERISIERER
 GARRA PULVERIZADORA


Serie FR

Aplec
 Equipment World

model	(2)	(1)	(2)	model	(2)	(1)	(2)
	8	ton	14		49	ton	70
FR 09RD	9		12	FR 50RD	51		67
FR 13RD	12		17	FR 70RD	66		88
	13		15		68		85
FR 15RD	15		23	FR 100N	84		135
	16		21		86		130
FR 20RD	21		30	FR 200	95		205
	22		28		100		200
FR 25RD	28		38	FR 250	95		275
	29		35		100		250
FR 35RD	34		53				
	36		50				

(1) Accoppiamento escavatore-attrezzatura ottimale / Optimum excavator-equipment combination
 Couplage pelle-équipement optimale / Acoplamiento excavadora-implemento optimal
 Optimale Bagger-Ausrüstung Kombination / Combinação máquina-implemento ideal

(2) Accoppiamento escavatore-attrezzatura possibile / Possible excavator-equipment combination
 Couplage pelle-équipement possible / Acoplamiento excavadora-implemento posible
 Mögliche Bagger-Ausrüstung Kombination / Combinação máquina-implemento possível

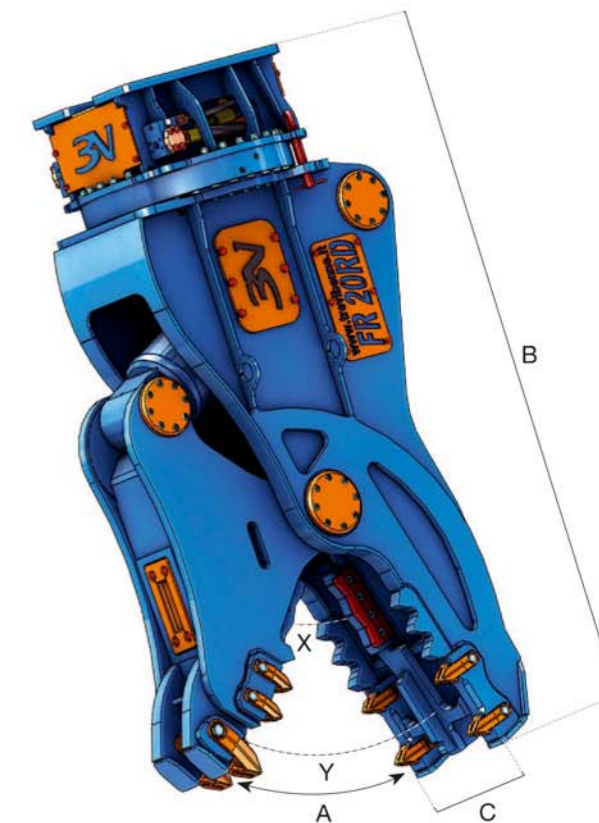

www.aplegroup.com



HARDOX
WEAR PLATE



HARDOX
IN MY BODY

		FR 09RD*	FR 13RD*	FR 15RD*	FR 20RD*
kg	kg.	920	1320	1650	2210
A	mm.	655	705	745	870
B	mm.	1730	1920	2050	2330
C	mm.	360	410	450	505
	mm.	140	220	220	260
X	t.	85	140	190	205
Y	t.	40	55	65	80
Ø max	mm.	25	30	35	40
♀	bar	310	310	310	310
♂	l/min.	150 / 250	180 / 250	180 / 250	200 / 300
♀	bar	140	140	140	140
♂	l/min.	10	10	10	10
		/	/	/	/

(*) Modello disponibile con denti intercambiabili imbullonati
 (*) Bolted interchangeable teeth version available
 (*) Modèle disponible avec dents boulonnées interchangeables

		FR 25RD*	FR 35RD*	FR 50RD*	FR 70RD*	FR 100N	FR 200	FR 250
kg	kg.	2840	3450	5190	7250	11450	20580	24640
A	mm.	915	980	1120	1320	1700	1900	2050
B	mm.	2420	2500	2840	3250	3850	4480	5140
C	mm.	600	640	735	790	970	1400	1400
	mm.	260	260	260	325	500	500	500
X	t.	230	350	380	490	545	860	990
Y	t.	105	120	140	180	235	380	410
Ø max	mm.	45	50	60	75	90	100	110
♀	bar	310	310	340	340	340	340	340
♂	l/min.	250 / 350	300 / 400	400 / 500	450 / 600	500 / 800	900 / 1200	900 / 1200
♀	bar	140	140	140	140	140	140	140
♂	l/min.	10	10	30	30	50	50	50
		/	/	✓	✓	✓	✓	✓

(*) Modelo equipado con dientes intercambiables atornillados
 (*) Model mit verschraubten Wechselsätzen
 (*) Modelo disponível com dentes intercambiáveis aparafusados