



## MIURA II PLUS AUTOMATIC XY CUTTER WITH VERTICAL ALIGNMENT

CUTTERS



### ABSOLUTE SPEED AND CUTTING PRECISION

**High performing cutting machine for X and Y trimming of flexible materials  
 with automatic vertical cutting correction.**

- ▶ Combined horizontal and vertical cutting for the fastest finish for your printed and unprinted rolls

**NEW** Maximum precision thanks to the **EDGE CONTROL** that reads the line longitudinally printed along the entire length of the roll

- ▶ High performing trimmer: cut one roll of 50 meters (164 ft.) in 3 minutes
- ▶ Intuitive set up parameters thanks to the user-friendly LCD touch screen
- ▶ Available in roll to sheet (Miura II Plus) and roll to rolls version (up to 3 rolls) (Miura II Plus WP - wallpaper)

#### SUITABLE FOR:

- Paper (also laminated or encapsulated)
- Wallpaper
- Vinyl & self adhesive vinyl
- Backlit & frontlit display
- Reflective material
- PVC banner (up to 900 gr/m<sup>2</sup> - 27 oz./ya<sup>2</sup>)
- Magnetic rubber
- Polycarbonate (film)
- Canvas & polyester (with liner)
- Many more..



# TECHNICAL SPECIFICATIONS MIURA II PLUS

	MIURA II 160 PLUS MIURA II 265 PLUS	MIURA II 160 PLUS WP (WALLPAPER)
Working width	1650 mm (65 in.) 2650 mm (105 in.)	1650 mm (65 in.)
Maximum cutting thickness	1,2 mm (0,04 in.)	1,2 mm (0,04 in.)
Feeding speed	1 - 30 m/min. (3 - 98 ft./min.)	1 - 15 m/min. (3 - 49 ft./min.)
Usable cutting units	max. 8	max. 8
Cross cutting speed	5 - 120 m/min. (16 - 393 in./min.)	5 - 120 m/min. (16 - 393 in./min.)
Max. roll diameter	300 mm (12 in.)	300 mm (12 in.)
Max. roll weight	60 kg (132 lb.)	60 kg (132 lb.)
Power supply	230 V - 50 Hz - 650 W	230 V - 50 Hz - 650 W
Dimensions (W x L x H)	2500 x 1000 x 1300 mm (99 x 40 x 51 in.) 3500 x 1000 x 1300 mm (137 x 40 x 51 in.)	2500 x 1200 x 1300 mm (99 x 48 x 51 in.)
Weight	340 kg (749 lb.) / 510 kg (1124 lb.)	410 kg (903 lb.)



Automatic vertical alignment control panel



User-friendly touch screen control panel display



Advanced cutting mark reader



Optical sensor for vertical alignment




Fine positioning of the cutting blades (optional)



Miura II Plus WP for wallpaper: front rewinding shafts with independent clutches and speed regulator



Unwinding shaft brake for adjustments of tension of the material



Single lengthwise rotary crush cutter (twin cutters optional)




Fine pressure adjustment (according to the types of material)

Manufactured in compliance with CE regulations



Distributor

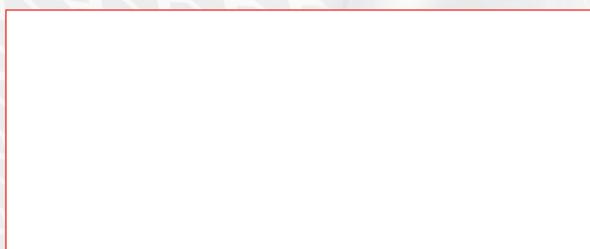

Follow us:

