




Community Design No: 000235429
 UK Registered Design No: 2098802

Features / Benefits

- Choice of Petrol/Diesel Powered Fire Fogging Units
- Baffled 940 ltr Water Tank
- 43tr Integral Foam Tank with metered Injection System
- Unique Brendon Live Hose Reel
- Fire Foaming Lance and Nozzle
- Fire Fogging Lance CW 65° and 15° nozzles
- Ideal for:
 - Factory areas
 - Difficult access sites
 - Controlled heathland burning
 - Estate management
 - Outdoor events
- Good ground clearance allowing for difficult terrain

Max Pressure:	BFF30KPE/BFF30KLN 3000 PSI / 207 BAR
Volume:	3.3 GPM / 15 LPM
Pump:	Cat Pump
Engine Choice:	Honda GX390 Petrol with Electric Start Yanmar L100N Diesel with Electric Start
Drive:	Vee Belt Drive
Tank:	940 ltr polyethylene baffled water tank
Delivery Hose:	15m double braided
Gun:	With swivel coupling and Quick Screw adaptor
Lance:	1m two piece stainless steel lance
Nozzle:	Fire Foaming Nozzle and Fire Fogging Nozzle
Chassis:	Fully road towable with certified lifting points
Weight:	450kg (petrol) 500kg (diesel)
Dimensions:	3450mm x 1600mm x 1400mm
Thermo-sensor valve:	Protects pump from re-circulation overheat
Chemical System:	Fire fighting foam supplied by metered high pressure chemical system

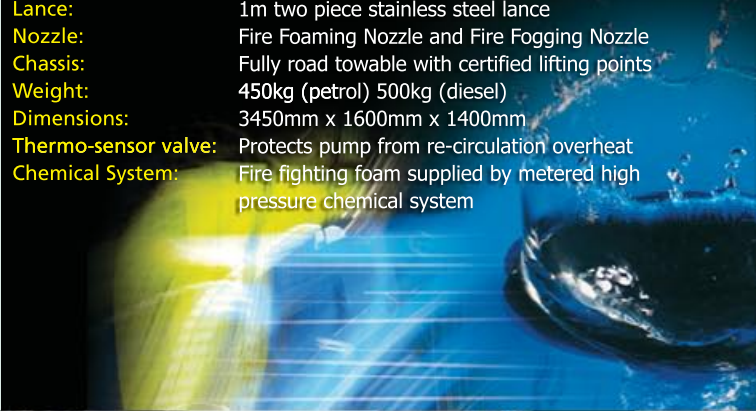

Specification may differ per country. Brendon reserves the right to alter the specification without notice.



Sandblasting

Drain Jetting

Mobile Reel

Gulper Kit