

SISTEMA DE CONFERENCIAS

UNIDAD DE CONTROL CENTRAL

TL-Z3 **Unidad central**


ZJ-KR **Expansión**

Sistema de conferencias con conexión por cable, para un total de 200 unidades de conferencias, con toma de auriculares y control de volumen. El sistema permite activar hasta 4 micrófonos de delegado al mismo tiempo. Opcionalmente puede controlarse desde ordenador e integrarse con cámaras de CCTV.



Alimentación	AC110/220 V AC, 50/60Hz
LCD	128 x 64 pixels, retroiluminado
Sensibilidad VOX	H/M/L (77 dB / 80 dB / 82 dB)
Consumo (max)	300 W
THD	< 0,3%
Relación señal-ruido	> 95 dB(A)
Respuesta en frecuencia	30 Hz ~ 20 KHz
Rango dinámico	> 85 dB
Entrada de audio externa	6.5 mm jack, 0.775 V
Salida de audio	1 x balanced audio; 2 x unbalanced audio
Salida de grabación de audio	0 ~ 2,8 Vpp
Capacidad	60 - 70 units
Capacidad máxima sistema*	200
Protocolo comunicación PC	RS-232
Protocolo de seguimiento de cámaras	RS-485
Cámaras	4
Limitación delegados	1/2/3/4
Protocolo de seguimiento de video	PELCO-P9600 VISCA
Entrada de matriz de audio	RCA x 4 (1 Vpp 75 Ω)
Salida de matriz de audio	RCA x 2 (1 Vpp 75 Ω)
Temperatura de funcionamiento	-0 ~ 45° C
Instalación	Dexktop or 19" rack mounting
Dimensiones (ancho*fondo*alto)	485 mm x 325 mm x 90 mm
Peso	14 Kg

*Con la unidad de expansión ZJ-KR: 60 - 70 units

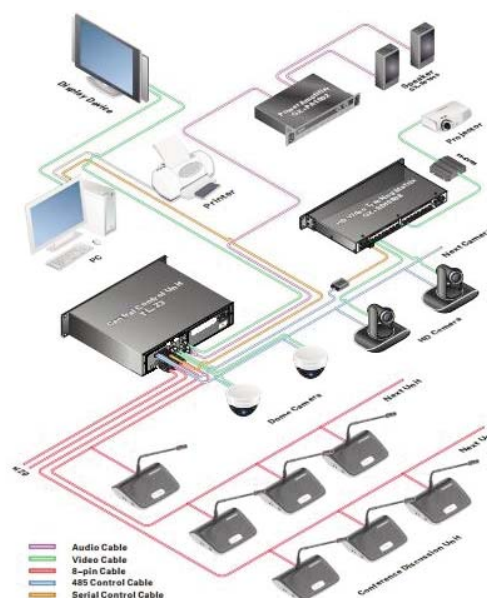

CONFERENCE SYSTEM

CENTRAL CONTROL UNIT

TL-Z3

Central unit

ZJ-KR

Expansion

Conference system with cable connection, for up to 200 conference units, with headphone jack and volume control. The system allows activating up to 4 delegate microphones at the same time. Optionally it can be controlled from a computer and integrated with CCTV cameras.



Power Supply	AC110/220 V AC, 50/60 Hz
LCD	Dot matrix: 128 x 64 backlit
VOX sensitivity	H/M/L (77 dB/ 80 dB / 82 dB)
Consumption (max)	300 W
THD	< 0.3%
SNR	> 95 dB(A)
Frequency response	30 Hz ~ 20 KHz
Dynamic range	> 85 dB
External audio input	6.5 mm jack, 0.775 V
Audio output	1 x balanced audio; 2 x unbalanced audio
Recording Audio output	0 ~ 2.8V Vpp
Capacity	60 - 70 units
Max system capacity*	200
PC communication methods	RS-232
Camera tracking ways	RS-485
Cameras	4
Active delegate microphone limit	1/2/3/4
Video tracking protocol	PELCO-P9600 VISCA
Audio matrix input	RCA x 4 (1 Vpp 75 Ω)
Audio matrix output	RCA x 2 (1 Vpp 75 Ω)
Operating temperature	-0 ~ 45° C
Installation	Dextkop or 19" rack mounting
Dimensions (W*D*H)	485 mm x 325 mm x 90 mm
Weight	14 Kg

*With expansion unit ZJ-KR60 - 70 units

