

Options:

2-row harrow

Levelflex can also be mounted with 2 rows of h/d harrow tines. The tines are hydraulically adjusted from the tractor cab and are ideal to use direct onto ploughed land. The tines cultivate the soil before the packer levels and consolidates prior to sowing.



Levelflex can be fitted with a crackerboard. The heavy duty spring steel tines (45x10 or 80x10) have a greater vibration effect, crushing clods and leveling the surface. The working depth of the crackerboard is hydraulically adjustable – even in work. This makes it possible to work to optimum effect in different soil types. The working angle is adjusted by spindles. Due to the special parallelogram suspension the working depth and the angle of work are independently adjustable. This makes it possible to work relatively aggressively providing a more intensive cultivation effect.

As an option it is now possible to mount a weight block to the Levelflex. Road lights are also an option.

Technical specifications:

Type	150 cm	150cm for 4m crackerboard	250 cm	300 cm	400 cm	400 cm hydr.	450 cm hydr.	500 cm hydr.	600 cm hydr.
HP required	20 HP	20 HP	25 HP	30 HP	40 HP	50 HP	60 HP	65 HP	70 HP
55cm Cambridge Weight/nos.	-	-	1340 kg 45 pcs.	1550 kg 55 pcs.	1930 kg 75 pcs.	2440 kg 75 pcs.	2590 kg 79 pcs.	2745 kg 91 pcs.	3000 kg 111 pcs.
60cm Cambridge Weight/nos.	-	-	1650 kg 45 pcs.	1920 kg 55 pcs.	-	-	-	-	-
53cm Crosskill Weight/nos.	-	-	970 kg 22 pcs.	1110 kg 27 pcs.	1370 kg 37 pcs.	1850 kg 35 pcs.	1930 kg 39 pcs.	1990 kg 45 pcs.	2050 kg 55 pcs.
60cm Crosskill Weight/nos.	-	-	1245 kg 22 pcs.	1445 kg 27 pcs.	1780 kg 37 pcs.	2360 kg 35 pcs.	2480 kg 40 pcs.	2595 kg 45 pcs.	2825 kg 55 pcs.
55cm Cross-Combi Weight/nos.	-	-	1490 kg 38 pcs.	1695 kg 46 pcs.	2125 kg 62 pcs.	2635 kg 62 pcs.	2880 kg 70 pcs.	3125 kg 78 pcs.	3575 kg 94 pcs.
80cm packer rings Weight/nos.	900 kg 10 pcs.	920 kg 10 pcs.	1260 kg 17 pcs.	1175 kg/15 pcs. 1400 kg/20 pcs.	1435 kg 20 pcs.	1945 kg 20 pcs.	2175 kg 22 pcs.	2270 kg 26 pcs.	2595 kg 30 pcs.
90cm packer rings Weight/nos.	1140 kg 10 pcs.	1160 kg 10 pcs.	1630 kg 17 pcs.	1520 kg/15 pcs. 1860 kg/20 pcs.	-	-	-	-	-
80/90/80cm packer rings Weight/nos.	-	-	-	1290 kg 5/5/5 pcs.	1575 kg 7/6/7 pcs.	2085 kg 7/6/7 pcs.	-	-	-
80/wheels/80 cm packer rings Weight/nos.	-	-	-	1250 kg 5/4/5 pcs.	1428 kg 7/4/7 pcs.	-	-	-	-
Crackerboard, tines 45X10 Weight/nos.	-	250 kg 28 pcs.	160 kg 18 pcs.	175 kg 22 pcs.	200 kg 28 pcs.	250 kg 28 pcs.	280 kg 32 pcs.	315 kg 36 pcs.	380 kg 44 pcs.
Crackerboard, tines 80x10 Weight/nos.	-	310 kg 22 pcs.	200 kg 14 pcs.	225 kg 16 pcs.	260 kg 22 pcs.	310 kg 22 pcs.	350 kg 24 pcs.	395 kg 28 pcs.	470 kg 34 pcs.
2 row harrow Nos. of tines	-	-	200 kg 18 pcs.	230 kg 22 pcs.	305 kg 29 pcs.	350 kg 29 pcs.	375 kg 33 pcs.	403 kg 36 pcs.	525 kg 44 pcs.
Transport width	220cm	250cm	250cm	300cm	400cm	290cm	290cm	290cm	290cm

DAL-BO – SIMPLE AND ROBUST



LEVELFLEX



Front packer

Suitable to mount a hydraulic crackerboard




Working width 1.50-6.00 m

Levellflex

Levellflex is a modern front packer and ideal for excellent seed bed preparation. In developing this implement it has been important to mount the front packer as close as possible to the tractor, this minimizes the required lifting force and keeps stresses on the tractor and front linkage to a minimum.



The front mounting and improved geometry actually means that the implement is being 'pulled' forwards, making it easier to steer.

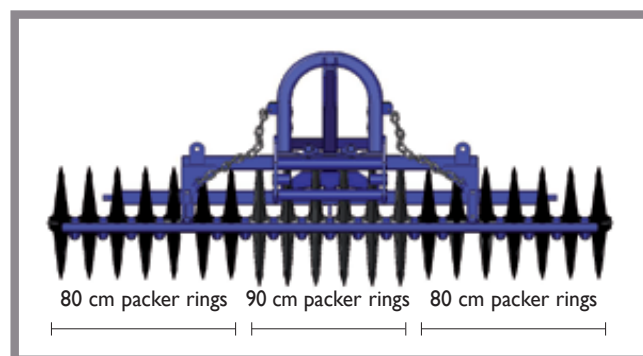

On the hydraulic folding 4m and 6m Levelflex models the hydraulic folding wing sections fold neatly to give a transport width of only 2.9m. The hydraulic folding models are fitted with an automatic mechanical locking device for transport.



The combination of 80cm and 90cm dia rings is becoming more popular. The larger 90cm rings pack tighter the soil between the tractor wheels, whilst the 80cm rings press the soil either side. This has proven to give a better sowing capacity and more even wear on the sowing combination.




In lighter soil types, such as sand, we recommend the combination of 80cm rings on the wing sections and 11.5/80 – 15.3 wheels in the middle. Robust scrapers keep the wheels clean, and chains run between the rings allowing them to run clean.



Levellflex is built with a newly designed headstock which allows more flexibility when mounting to larger tractors. In addition to this Levelflex is now mounted with strong cleaning chains that run between the rings ensuring better cleaning.

Ring profiles:

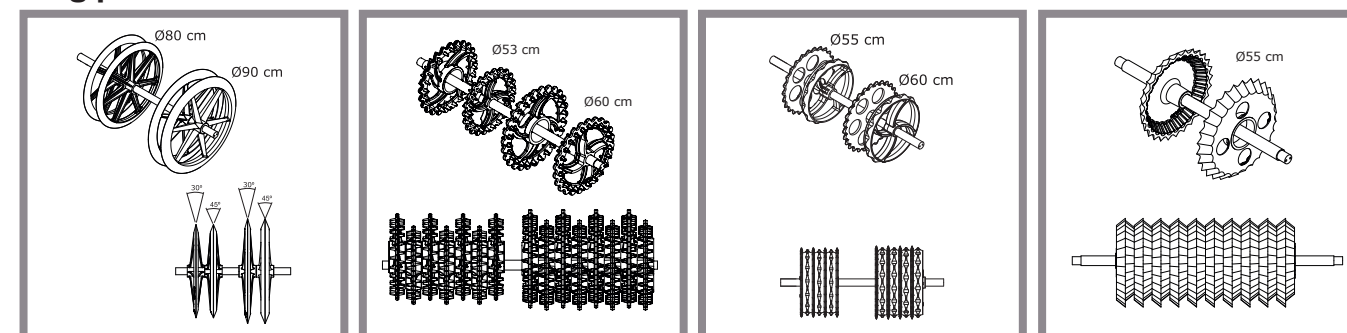

80 and 90cm packer rings 53 and 60cm Crosskill rings 55 and 60cm Cambridge rings 55cm Cross-Combi rings

Depending on soil condition, seed combination and size of the machine, Levelflex can be supplied with 80 or 90cm packer rings, 53 or 60cm Crosskill rings, 55 or 60cm Cambridge rings or 55cm Cross-Combi rings. To obtain the best working effect when using the Levelflex it can be fitted with either 30° or 45° rings ensuring you get the best possible finish on your soil type.

As the best fine grained high quality cast iron is used DAL-BO roller rings carry a 3 year guarantee against casting faults.

