G400, G420



Turn-mill centers for high-performance machining of large workpieces



New dimensions in turning and milling

The INDEX G400/G420 is an innovative turn-mill center in a class of its own – especially when it comes to efficient production of large workpieces with high complexity and variance.

Based on a rigid and vibration-damping machine bed in mineral cast block design and generously dimensioned linear guides in X and Z axes, this series stands for modern mechanical engineering and thus for excellent machining results with high productivity.

Three tool carriers with a tool pool of up to 139 tools provide maximum flexibility for complete machining of complex workpieces.

A total of up to 16 productive axes ensure impressive machining results without exception.

The large work area is unique in this class and impresses with its sophisticated features that allow simultaneous machining using all three tool carriers with no collision risk.



The vertically sloping interior paneling ensures optimum chip flow. The chip conveyor can be mounted on the right or left side, depending on customer requirements.

The INDEX G400/G420 is relied on for the manufacture of a wide range of products in many industries such as machinery construction, automotive and aerospace.

The machine concept

- Identical main and counter spindles with spindle clearance 102 mm or 120 mm in dia.
- Chuck up to 400 mm in dia.
- 3 tool carriers for up to 139 tools
- Powerful motorized milling spindle with proven Y/B quill kinematics for complex 5-axis milling operations (G420)
- Sophisticated work area concept for turning lengths up to 1,600 / 2,300 mm and variable machining options
- High thermal and mechanical stability
- High dynamic response (rapid traverse rate up to 50 m/min)



Best performance for applications in the automotive, medical, aerospace, and machinery industries

INDEX offers its customers optimal solutions for flexible and efficient production. INDEX engineers have leveraged years of experience from many industries in their product development. Products and processes are made ready for commercial

production through feasibility studies, efficiency analyses and, above all, through close collaboration with customers. Due to the modular design and the great flexibility of INDEX products, customers can also utilize an extensive modular system.









Shaft



₫ 60 mm x 510 mm

Cup

Aluminum

110 mm x 120 mm





Shaft



🙏 60 mm x 320 mm

Centrifuge



1 200 mm x 60 mm

The INDEX G400 and INDEX G420 turn-mill centers offer the best performance for customers from the machinery, automotive, and aerospace industries, with high availability and process reliability – the most comprehensive solution when it comes to high-performance machining of large workpieces.







Rotor carrier



140 mm x 285 mm



Flange

Steel

178 mm x 120 mm



Bearing flange



129 mm x 136 mm





Turret head

Steel 273 mm x 76 mm

Complete machining based on a modular system

The modular system in this series offers a wide range of options. Up to 3 tool carriers can be integrated into the work area and all of theses can be equipped with a Y axis.

The work area offers ample space to machine any kind of workpiece. The working range allows for parts up to 1,600/2,300 mm in length.

The powerful main and counter spindles are designed for bar diameters up to 102 mm / 120 mm and for chucked parts up to 315 mm / 400 mm in dia.


Turret steady rests are available for machining long or shaft-shaped parts.

Of course, the INDEX G420 is equipped with a powerful INDEX motorized milling spindle and is capable of simultaneous 5-axis machining.

The ergonomic setup and operating concept played a major role in the new design.


All the relevant components are easily accessible for operating and maintenance personnel. Optionally, an integrated workpiece handling system matched to the machining processes can be used for loading and unloading shaft and flange parts.

Furthermore, the modular robot cell iXcenter is available for all machines in this series, for flexible feeding and discharging of blanks and finished parts.

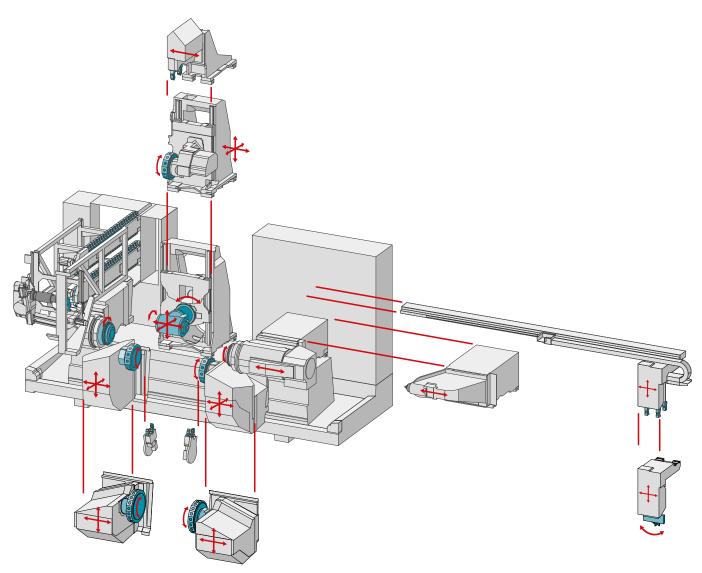




The components




Main and counter spindles


- Spindle clearance dia. 102 mm / 120 mm
- Max. speed 4,000 rpm / 3,000 rpm
- 41 kW, 920 Nm (40% DC) / 43 kW, 1,000 Nm (40% DC)
- Chuck diameter 315 mm / 400 mm



Upper turret (INDEX G400)


- 12 live stations, each VDI 40 with W-serration
- 5,400 rpm, 10.5 kW, 35 Nm (25% DC)
- X axis 295 mm, rapid traverse rate 30 m/min
- Y axis +/-100 mm, rapid traverse rate 20 m/min
- Z axis 1,580 mm / 2,290 mm, rapid traverse rate 50 m/min






Two lower turrets with 12 stations each

- 12 live stations, each VDI 40 with W-serration
- 5,400 rpm, 10.5 kW, 35 Nm (25% DC)
- X axis 185 mm, rapid traverse rate 30 m/min
- Y axis +/-70 mm, rapid traverse rate 20 m/min
- Z axis 1,600 / 2,300 mm, rapid traverse rate 40 m/min



Motorized milling spindle (INDEX G420)

- HSK-T63, 12,000 rpm, 150 Nm (25% DC)
- Capto-C6, 18,000 rpm, 100 Nm (25% DC)
- X axis 750 mm, rapid traverse rate 30 m/min
- Y axis +/-170 mm, rapid traverse rate 20 m/min
- Z axis 1,600 / 2,300 mm, rapid traverse rate 50 m/min
- B axis -25°/+205°, rapid traverse rate 75 rpm




Tailstock

- SK40 mounting
- Pressing force 21,000 N (40% DC)


9,000 N (100% DC)

• Rapid traverse rate 40 m/min




Tool magazine (INDEX G420)

- Single-row: 58 tool locations HSK-T 63 / Capto-C6
- Double-row: 115 tool locations HSK-T 63 / Capto-C6
- Max. tool weight 10 kg
- Max. tool diameter 160 mm
- Max. tool length 500 mm
- Setup station




Upper steady rest on separate slide (optional)

• Clamping range 12 - 152 mm / 30 - 245 mm




Lower turret steady rests (optional)

• Clamping range 20 - 101 mm / 50 - 131 mm




Workpiece handling unit for shafts (optional)


- Integrated 2-axis workpiece handling unit
- Max. workpiece diameter 120 mm
- Max. workpiece length 1,000 mm
- Max. workpiece weight 25 kg



Workpiece handling unit for flanges (optional)

- Integrated 3-axis workpiece handling unit
- Max. workpiece diameter 250 mm
- Max. workpiece weight 20 kg
- Max. workpiece length 200 mm






Two turrets with 18 stations each (optional for INDEX G400)

- 18 live stations each, VDI 40 with W-serration
- 5,400 rpm, 10.5 kW, 35 Nm (25% DC)
- X axis 210 mm, rapid traverse rate 30 m/min
- Z axis 1,600 / 2,300 mm, rapid traverse rate 40 m/min

Large degrees of freedom in the work area for a wide variety of machining options


INDEX G420

Maximum productivity by simultaneous machining with 3 tools

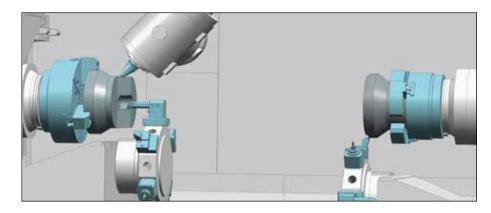


INDEX G420

Use of tools up to 500 mm long in the motorized milling spindle, e.g., for deep-hole drilling applications with the highest precision.

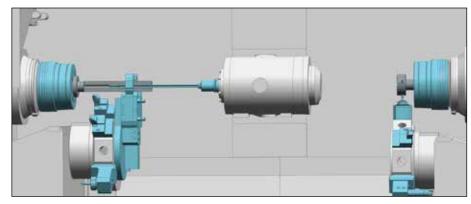


INDEX G400

Flexible shaft machining through the use of turret steady rests

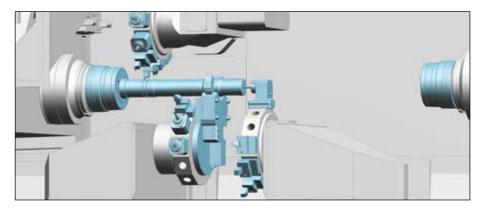


INDEX G400

Maximum freedom from collisions due to "submergence" of the lower tool carriers.

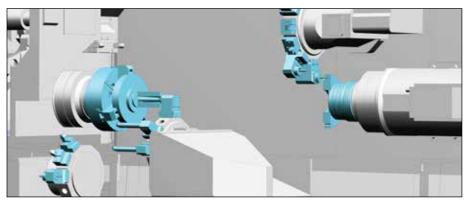






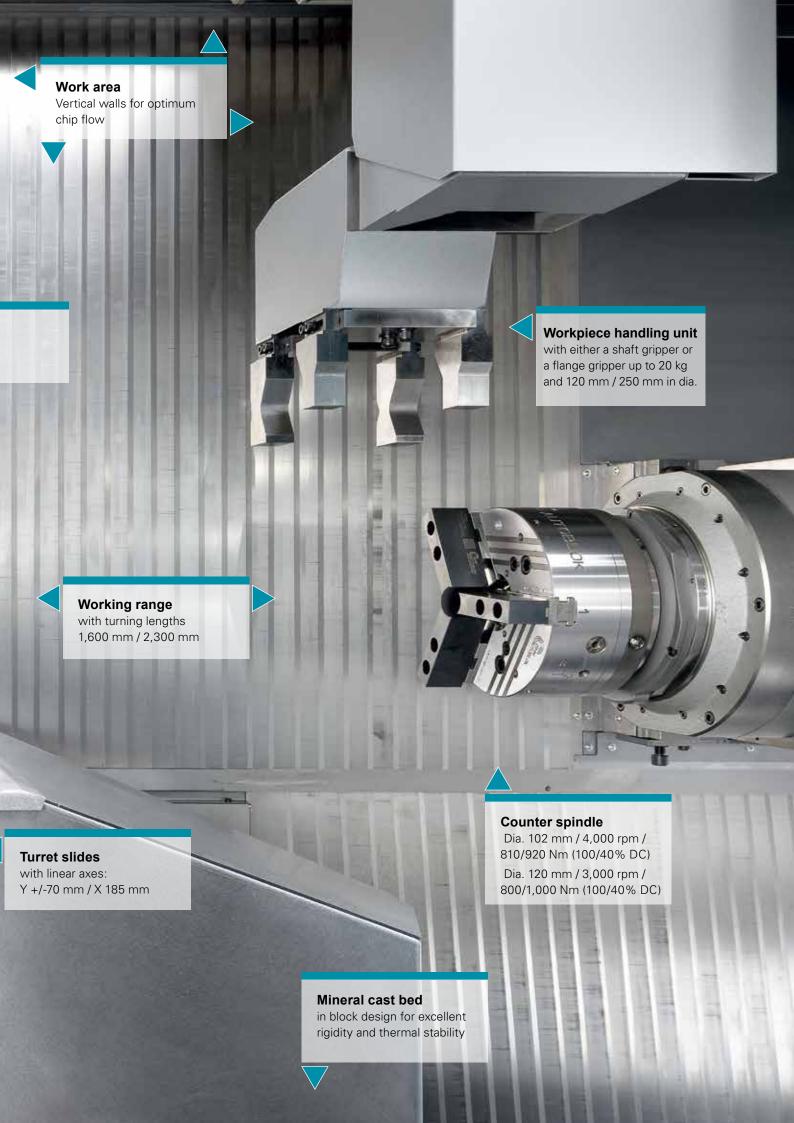

The cooling concept: efficient use of energy

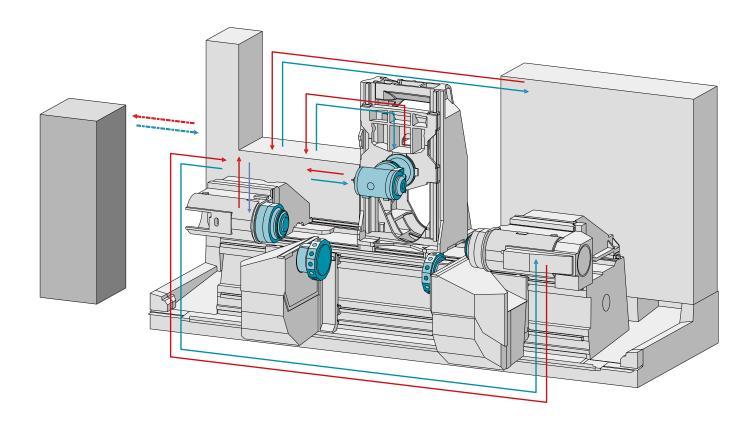

Intelligent use of proven cooling principles:

• Targeted heat dissipation

All high-loss heat sources of the INDEX G400/G420 are cooled directly by multiple fluid circuits. In addition to the cooling circuits for the main spindle, counter spindle, motorized milling spindle, and the torque drive of the B axis, there is also a separate cooling circuit for the hydraulic system and

control cabinet. The lost heat energy is absorbed directly in the coolant and removed from a central location of the machine.

Economic use of waste heat

The INDEX "cold water interface" allows the heat loss energy stored in the cooling medium to be removed from a central location and conveyed for another use, if required, e.g., production hall heat-

ing service water heating, or process heating for other production steps. The recovery of machine waste heat enables a sustainable reduction of energy costs in the company.

Climate-neutral dissipation of heat

The cold water interface provides the ability to dissipate heat in a climateneutral manner, if the machine waste heat stored in the cooling medium

cannot be used otherwise. The necessary cooling unit can be used with the help of the water interface first on the outside of the production hall and secondly also centrally for several machines. This offers a considerable energy savings potential for production hall heating dissipation/climate control or increased efficiency as a result of centralized heat disposal.

Integrated automation solutions for flexible production



The integrated workpiece handling unit is available as an option. It can be used equally for loading and unloading as well as for the removal of remnants and is designed for parts weighing up to 25 kg and with a diameter of up to 120 mm (shaft) or 250 mm (flange). The handling unit is equipped with 2 or 3 CNC axes that are

Further individual automation solutions, such as conveyor belts or robot handling with ancillary functions, can be integrated on a customer-specific basis.

operated from the machine


control.

Removal of finished parts (or feeding) using a workpiece-specific gripper for shaft parts or flange parts

2-axis workpiece handling system moves to the removal point without collision



3-axis workpiece handling for flange parts



Robot cell Xcenter

Intelligent automation - even more flexibility and efficiency

With the iXcenter robot cell, blanks and finished parts can be fed and discharged quickly, safely and flexibly.

The overall sequence between the machine and the robot cell is created using predefined macros in the NC program.

The sliding door in the machine's work area, which opens and closes automatically, provides access to the robot.

The iXcenter is modular in structure and allows you to efficiently integrate various processes. The iXcenter's ease of access to spindles, tool carriers, and tool magazine makes you fully prepared to set up the machine.

Your benefits

- Automatic and ergonomic workpiece feeding and discharge
- Modular basic cell that allows flexible expansion
- Low-manned continuous operation is possible
- Door designed for optimum access and view of the machine
- Compact design
- Modern INDEX machine design
- Entire system from one source

Technical data

- 6-axis robot for 165 kg load capacity
- Reach 2,660 mm







Unlock more potential

Integration of downstream processes by attaching specialized modules

- Pallet/rack modules
- Storage systems
- Circulating conveyors
- Measuring units
- Testing modules
- Discharge units

- Cleaning stations
- Deburring modules
- Laser marking modules
- Additional customer-specific solutions

Add on any configuration options available for the machine

- Internal handling (flange + shaft)
- Bar loading magazines
- Chip conveyors arranged left/right

Options available for the basic cell

- 6-axis robot with up to 270 kg load capacity
- Double grippers in flange and shaft versions
- Automatic gripper change, including gripper storage



The cockpit for easy integration of the machine in your business organization



Focus on production and control - Industry 4.0 included.

The iXpanel operating concept provides access to networked production. With iXpanel, your operator always has all relevant information for efficient production right at the machine. iXpanel is included with the standard version and can be enhanced with custom options. You can use iXpanel just as you require it for your business organization – that's Industry 4.0 tailored to suit your needs.

Future-proof.

iXpanel integrates the latest control generation SIEMENS Sinumerik 840D solution line. Use iXpanel intuitively via an 18.5" touchscreen monitor.







Productive.

Maximum performance through comprehensive technology cycles and programming screens, e.g. for optimum turning, milling and drilling, especially when using several tools simultaneously.

Intelligent.

The machine always starts with the control home screen. Other functions can be displayed on a second screen at any time, and operators can enjoy direct, activity-related assistance already with the standard version, such as workpiece drawings, setup lists, programming aids, documentation, etc., and all this right at the machine.

Virtual & open.

With the optional VPC box (industrial PC), iXpanel opens up the world of virtual machines with 3 operating modes

- CrashStop
- RealTime mode
- Independent simulation (VM on board)

directly in the control system.


Thanks to the VPC box, the machine can be integrated into your IT structure without any restrictions.

index-werke.de/ixpanel




studio

Work area INDEX G400 - Turning length 1,600 mm (2,300 mm) -

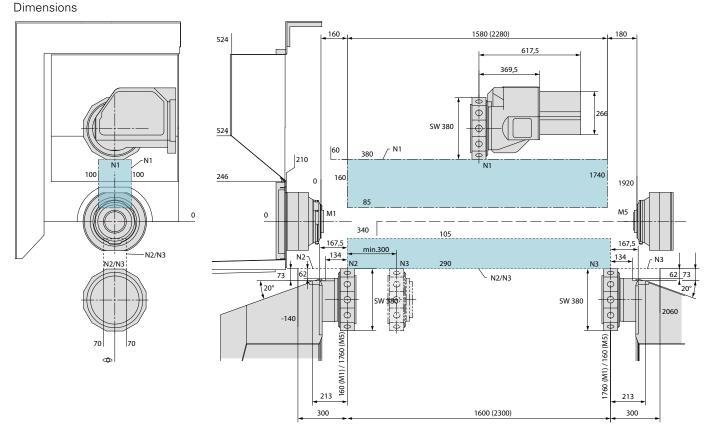



Work area INDEX G420 - Turning length 1,600 mm (2,300 mm) - Dimensions

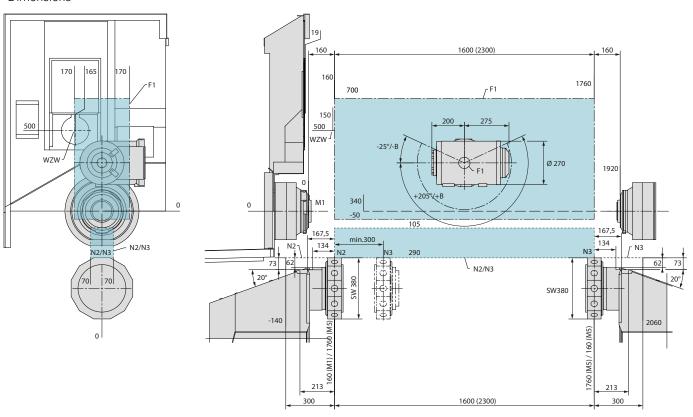





Installation plan for INDEX G400/G420 Turning length 1,600 mm (2,300 mm) / chip conveyor at left and workpiece handling

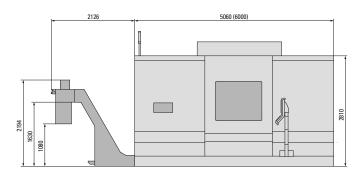





Installation plan for INDEX G400/G420
Turning length 1,600 mm (2,300 mm) / chip conveyor at right iXcenter with basic cell and pallet module

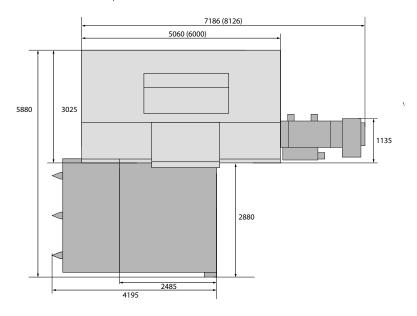

Technical data

Working rouge		INDEX G400		INDEX G420	
Working range		1.000		1.600	
Turning length	mm	1,600		1,600	
Turning length – long version	mm	2,300		2,300	
Main spindle and counter spindle					
Spindle clearance	mm	102	120	102	120
Spindle head ISO 702/1		A8	A11	A8	A11
Max. speed	rpm	4,000	3,000	4,000	3,000
• Drive power (100% / 40% DC)	kW	34/41	34/43	34/41	34/43
• Torque (100%/40% DC)	Nm	810/920	800/1,000	810/920	800/1,000
Chuck diameter	mm	315	400	315	400
C axis resolution	degrees	0.001	0.001	0.001	0.001
Upper tool carrier		Turret		Motorized milling spindle	
Kinematics		XYZ		XYZB	
Tooling system		DIN 69893-7 / ISO 26623		HSK-T63 // Capto-C6	
Number of stations		12			
Max. speed	rpm	5,400		12,000 // 18,000	
Drive power (100% DC)	kW	10.5		26 // 27.5	
Torque (25% DC)	Nm	35		150 // 100	
X slide travel, rapid traverse rate, feed force	mm / m/min / N	295 / 30 / 10,000		750 / 30 / 10,000	
Y slide travel, rapid traverse rate, feed force	mm / m/min / N	+/-100 / 20 / 11,000		+/-170 / 20 / 11,000	
Z rapid traverse rate, feed force	m/min / N	50/11,000		50/11,000	
B axis swivel range, rapid traverse rate	degrees/rpm			-25 / +205 / 75	
Tool carrier, bottom left/right		Turret XYZ/XZ		Turret XYZ	
Tooling system DIN 69880		VDI-40, W-serration		VDI-40, W-serration	
Number of stations (live), turret XYZ/XZ		12/18		12	
Max. speed	rpm	5,400		5,400	
Drive power (25% DC)	kW	10.5/10.5		10.5	
• Torque (25% DC)	Nm	35/35		35	
X slide travel, rapid traverse rate, feed force	mm / m/min / N	Turret XYZ 185 / 30 / 10,000		185 / 30 / 10,000	
X slide travel, rapid traverse rate, feed force	mm / m/min / N	Turret XZ 210 / 30 / 10,000			
Y slide travel, rapid traverse rate, feed force	mm / m/min / N	+/-70 / 20 / 11,000		+/-70 / 20 / 11,000	
Z rapid traverse rate, feed force	m /min / N	40/11,000		40/11,000	
Tool magazine					
Tooling system				HSK-T63 / Capto-C6	
Tool magazine locations				58/115	
Max. tool weight	kg			10	
Max. tool diameter	mm			160	
Max. tool length	mm			500	
Max. tilting torque	Nm			15	
Turret steady rest (optional)					
Turret steady rest clamping range (with chip guard)	mm	20 - 101 / 50 - 131		20 - 101 / 50 - 131	
Workpiece handling unit for shaft/flange (option	ıal)				
Workpiece weight, shaft/flange	kg	25/20		25/20	
Max. workpiece diameter, shaft (for discharge)	mm (dia./length)	120/1,000		120/1,000	
Max. workpiece diameter, flange (feeding/discharge)	mm dia./length	250/200		250/200	
General data					
Length x width x height	mm	5,060 x 3,025 x 3,165		5,060 x 3,025 x 3,165	
Length x width x height - long version	mm	6,000 x 3,025 x 3,165		6,000 x 3,025 x 3,165	
Weight, short/long version	t	21/26		23/28	
Connected power	kW	112		112	
Control		Siemens S840D sl		Siemens S840D sl	

BRAZIL | Sorocaba INDEX Tornos Automaticos Ind. e Com. Ltda. Rua Joaquim Machado 250 18087-280 Sorocaba - SP Phone +55 15 2102 6017 vendas@indextornos.com.br br.index-traub.com

CHINA | Shanghai INDEX Trading (Shanghai) Co., Ltd. No. 526, Fute East 3rd Road Shanghai 200131 Phone +86 21 54176637 china@index-traub.com www.index-traub.cn

CHINA | Dalian INDEX DALIAN Machine Tool Ltd. 17 Changxin Road Dalian 116600 Phone +86 411 8761 9788 dalian@index-traub.com www.index-traub.cn

DENMARK | Langeskov INDEX TRAUB Danmark Havretoften 1 5550 Langeskov Phone +45 30681790 info@index-traub.dk www.index-traub.dk

GERMANY | Esslingen INDEX-Werke GmbH & Co. KG Hahn & Tessky Plochinger Strasse 92 73730 Esslingen Tel. +49 711 3191-0 info@index-werke.de www.index-werke.de

GERMANY | Deizisau INDEX-Werke GmbH & Co. KG Hahn & Tessky Plochinger Strasse 44 73779 Deizisau Tel. +49 711 3191-0 info@index-werke.de www.index-werke.de

GERMANY | Reichenbach INDEX-Werke GmbH & Co. KG Hahn & Tessky Hauffstrasse 4 73262 Reichenbach Tel. +49 7153 502-0 info@index-werke.de www.index-werke.de

FINLAND | Helsinki INDEX TRAUB Finland Hernepellontie 27 00710 Helsinki Phone +35 8 108432001 info@index-traub.fi www.index-traub.fi FRANCE | Paris INDEX France S.à.r.I 12 Avenue d'Ouessant / Bâtiment I 91140 Villebon-sur-Yvette Phone +33 1 69 18 76 76 info@index-france.fr www.index-france.fr

FRANCE | Bonneville INDEX France S.à.r.I 399, Av. de La Roche Parnale 74130 Bonneville Cedex Phone +33 4 50 25 65 34 info@index-france.fr www.index-france.fr

NORWAY | Oslo INDEX TRAUB Norge Liadammen 23 1684 Vesterøy Phone +46 8 505 979 00 info@index-traub.se www.index-traub.no

RUSSIA | Toglyatti INDEX RUS Lesnaya street 66 445011 Toglyatti Phone +7 8482 691 600 info@index-rus.ru ru.index-traub.com

SWEDEN | Stockholm INDEX TRAUB Nordic AB Fagerstagatan 2 16308 Spånga Phone +46 8 505 979 00 info@index-traub.se www.index-traub.se

SWITZERLAND | St. Blaise INDEX Werkzeugmaschinen (Schweiz) AG Av. des pâquiers 1 2072 St. Blaise Tel. +41 (32) 756 96 10 info@index-traub.ch www.index-traub.ch

SLOVAKIA | Malacky INDEX Slovakia s.r.o. Vinohrádok 5359 901 01 Malacky Phone +34 654 9840 info@index-werke.de sk.index-traub.com

U.S.A. | Noblesville INDEX Corporation 14700 North Pointe Boulevard Noblesville, IN 46060 Phone +1 317 770 6300 sales@index-usa.com www.index-usa.com

Visit us on our social media channels:











INDEX-Werke GmbH & Co. KG Hahn & Tessky Plochinger Strasse 92

Technical changes reserved

Printed in Germany

9783 - 07.20 - TD

47101

73730 Esslingen
Phone +49 711 3191-0

Fax +49 711 3191-0 Fax +49 711 3191-587 info@index-werke.de www.index-werke.de