
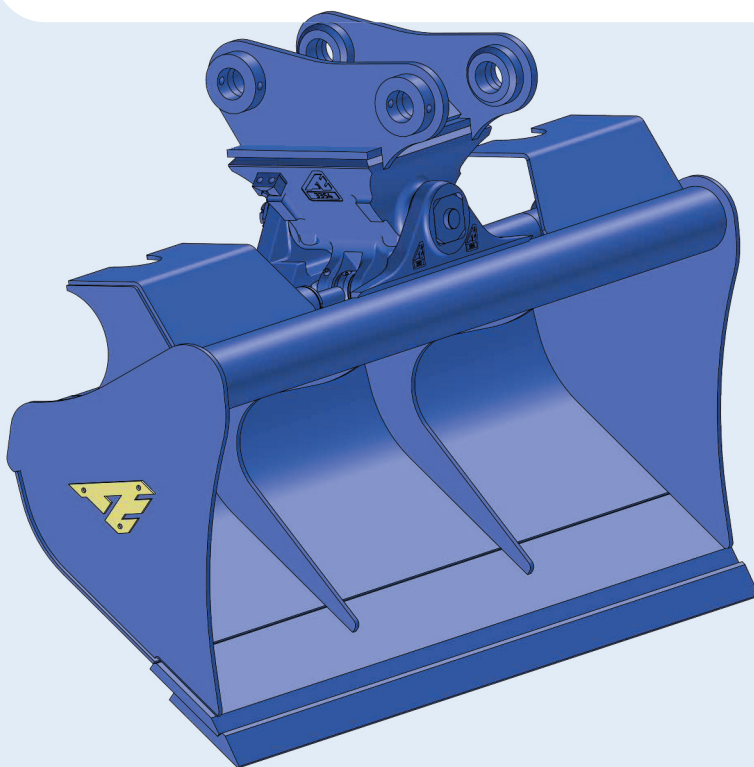


- 1 1 ó 2 cilindros horizontales.
- 2 Inclinación 2 x 45°.
- 3 Cuchilla soldada en el C31I, C41I, C51I.
- 4 Cuchilla reversible en el C60I.
- 5 Válvula de nivelación como opción a partir del C22I.

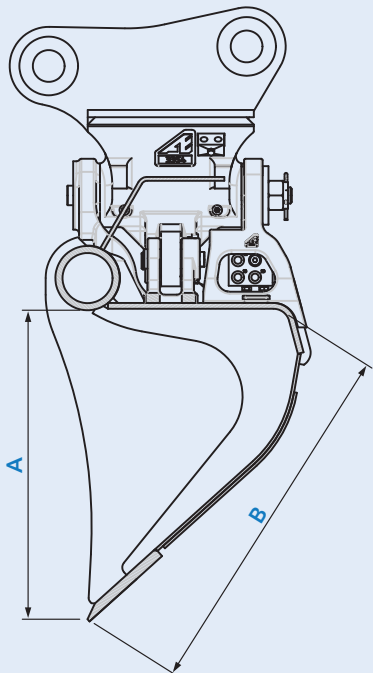

CE			A	B		
	mm	l	mm	mm	kg*	t
C05I04	1 020	60	280	293	90	1/2,5
C05I04	1 220	70	280	293	100	1/2,5
C12I05	1 220	90	279	337	129	2,6/3
C12I08	1 300	150	372	448	180	3,1/6
C12I08	1 400	160	372	448	186	3,1/6
C22I11	1 600	250	426	540	316	7/11
C22I11	1 800	285	426	540	335	7/11
C31I20	1 800	540	633	719	705	12/15
C31I20	2 000	600	633	719	755	12/15
C31I25	1 800	675	727	782	730	12/15
C31I25	2 000	750	727	782	780	12/15
C41I25	1 800	680	727	795	850	16/19
C41I25	2 000	760	727	795	890	16/19
C41I35	1 800	940	894	866	895	16/19
C41I35	2 000	1 055	894	866	970	16/19
C51I35	2 000	1 040	886	892	1 150	20/26
C51I35	2 200	1 160	886	892	1 210	20/26
C51I40	2 000	1 190	964	934	1 190	20/26
C51I40	2 200	1 325	964	934	1 245	20/26
C51I45	2 000	1 380	1 057	996	1 230	20/26
C51I45	2 200	1 530	1 057	996	1 290	20/26
C60I40	2 400	1 360	820	880	1 950	27/37
C60I40	2 500	1 420	820	880	1 995	27/37

*Los pesos se dan con kit QA.