



Proyectores lineales, potencia y calidad de luz
Linear projectors, power and light quality

- Iluminación lineal uniforme
- Adecuada para montar en superficie o como proyector
- Conexión en serie fácil y rápida
- Alto rendimiento lumínico
- Homogenous linear light
- Suitable for surface-mounted or as projector
- Easy and quick serial connection
- High efficiency



IP54 UGR19 CRI>90

0-10V PWM DMX DALI



Garantía 5 Warrantly
AÑOS 5 YEARS

DESCRIPCIÓN | DESCRIPTION

COMET W50 son luminarias de elevada luminosidad.

Destaca por su polivalencia y versatilidad ya que puede ser montada en superficie o funcionar como proyector.

Es idónea para iluminar todo tipo de superficie, gracias a sus ópticas. Especialmente indicada como iluminación arquitectónica o comercial.

El coste de mantenimiento es prácticamente nulo.

COMET W50 are luminaires of high-luminosity luminaires.

It stands out for its versatility since it can be surface-mounted or can work as a projector.

It is ideal to illuminate all types of surfaces, thanks to its optics. Specifically indicated as architectural or commercial lighting.

The maintenance cost is practically zero.

CARACTERÍSTICAS TÉCNICAS | TECHNICAL CHARACTERISTICS


Referencia Reference	Voltaje Voltage V DC	Potencia Power W/m	Temp. color Color temp. K	CRI	Flujo Flux lm/m	Eficiencia Efficiency lm/W	Ángulo Beam º	Cantidad Number LED
LLC-400-xxx-MxP-SEO	48	80	4000	>90	8000	100	18, 31, 46, 82 47x25	160
LLC-400-xxx-MxP-SES		160			16000			

Referencia Reference	Protección Protection	Regulación Dimmer	Disipación Disipation	Orientación Orientation º	Vida útil Useful life h (25ºC)	Temp. trabajo Work temp. ºC	Temp. stock Stock temp. ºC	Dimensiones Dimensions mm	Peso Weight kg
LLC-	IP54	PWM	Activa externa Active external	Fijo Fixed	>50000	-20 - +45	-30 - +50	1008	6,048


Referencia Reference	Radiador Radiator	Acabado Finish
LLC-	Aluminio anodizado Anodized aluminium	Aluminio anodizado Anodized aluminium

Por encargo se pueden realizar en diferentes temperaturas de color y CRI | By request it can be manufactured in different color temperatures and CRI


FOTOMETRÍA | PHOTOMETRY

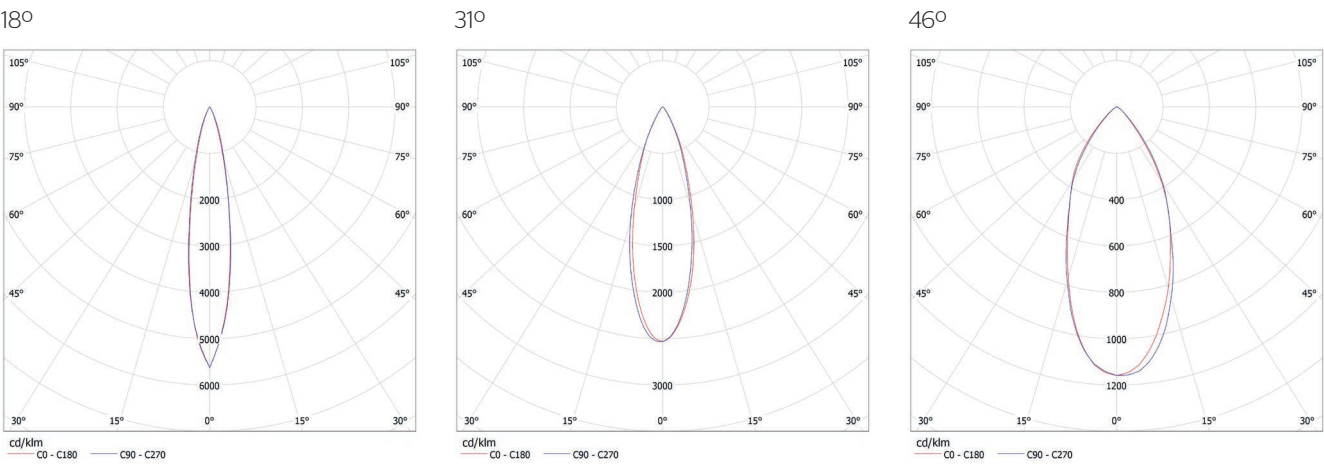


82°

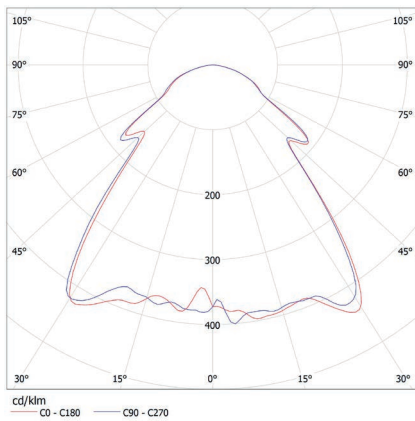

47x25°

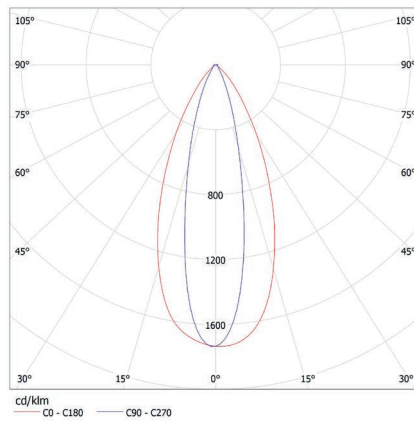


DIMENSIONES | DIMENSIONS mm

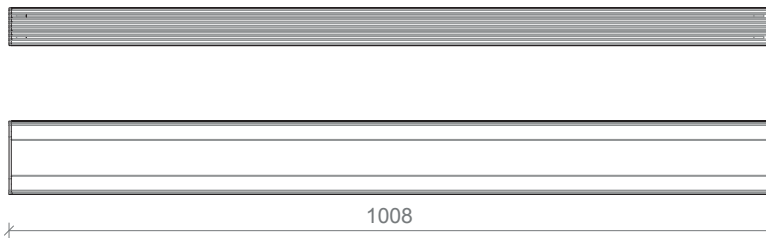

Por encargo se pueden realizar en diferentes medidas múltiples de 250 mm | By request it can manufactured in different sizes multiples of 250 mm

CONEXIONES | CONNECTIONS

Esquema | Diagram ON/OFF



Esquema | Diagram O-10V - PWM - DALI

