

SAKMA SPECIALIST IN LED TECHNOLOGY

MAPLE



Downlight de alto rendimiento con disipación activa
High efficiency downlight with active dissipation

- Frontales con distintos acabados
- Disipación activa
- Instalación rápida

- Covers with different finishes
- Active dissipation
- Quick Install



IP20 UGR17 CRI>90

0-10V PWM DMX DALI



Garantía 5 Warranty
AÑOS 5 YEARS

DESCRIPCIÓN | DESCRIPTION

MAPLE es un downlight, que permite personalizar los techos, diseñado y fabricado por SAKMA.

Se coloca de forma sencilla con un único click, es ligero y su montaje es ultrarrápido.

Incorpora un sistema de disipación activa. Dispone de embellecedores intercambiables de diferente forma, color o estampación.

MAPLE es una solución innovadora, duradera, creativa y ecológica para edificios, oficinas, hogares o espacios públicos.

MAPLE is a Down light, which allows you to customize the ceilings, designed and manufactured by SAKMA.

It is placed in a simple way with a single click, it is light and its assembly is ultra-fast.

It incorporates an active dissipation system using SynJet technology. It has interchangeable embellishments of different shape, color or stamping.

MAPLE is an innovative, durable, creative and ecological solution for buildings, offices, homes or public spaces.

CARACTERÍSTICAS TÉCNICAS | TECHNICAL CHARACTERISTICS

Referencia Reference	Voltaje Voltage V DC	Potencia Power W	Temp. color Color temp. K	CRI	Flujo Flux lm	Eficiencia Efficiency lm/W	Ángulo Beam °	Cantidad Number LED	
LMA-30C-085-Nxx-AGD	24	8	3000	>80	635	79	20 40	3	
LMA-30C-085-Nxx-AED				>90	580	73			
LMB-40C-085-Nxx-AGD			4000	>80	640	80			
LMB-40C-085-Nxx-AED				>90	600	75			
LMA-30C-085-Nxx-AGF		12	3000	3000	>80	924			77
LMA-30C-085-Nxx-AEF					>90	852			71
LMB-40C-085-Nxx-AGF			4000	4000	>80	936			78
LMB-40C-085-Nxx-AEF					>90	876			73


Referencia Reference	Protección Protection	Regulación Dimmer	Disipación Disipation	Orientación Orientation °	Vida útil Useful life h (25°C)	Temp. trabajo Work temp. °C	Temp. stock Stock temp. °C	Dimensiones Dimensions mm	Peso Weight kg
LMx-	IP20	0 - 100% PWM DMX DALI	Activa Active	Fijo Fixed	>50000	-20 - +40	-30 - +60	85x90,5 Ø	0,188

Referencia Reference	Radiador Radiator	Acabado Finish
LMx-	Aluminio anodizado Anodized aluminum	Diversos colores y formas Different colors and shapes


Por encargo se pueden realizar en diferentes temperaturas de color y CRI | By request we can be manufacture in other color temperatures and CRI

FOTOMETRÍA | PHOTOMETRY




20°

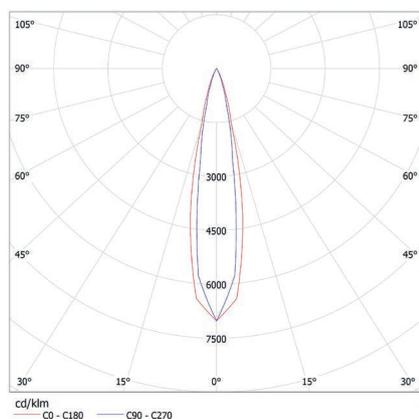

40°

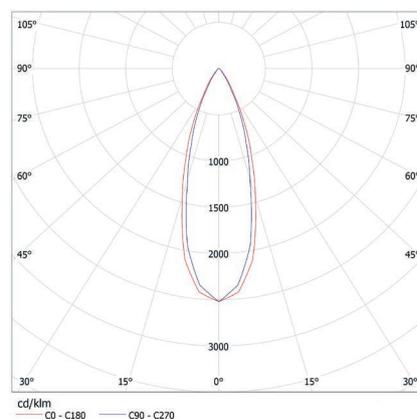


DIMENSIONES | DIMENSIONS mm

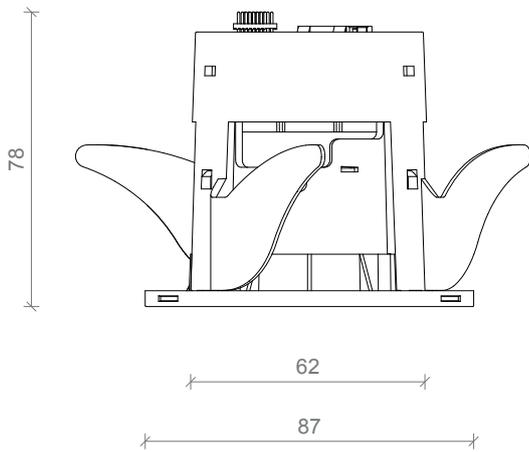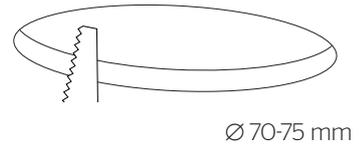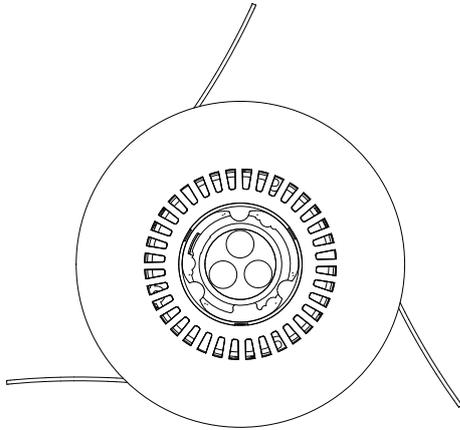


CONEXIONES | CONNECTIONS

Esquema | Diagram ON/OFF



Esquema | Diagram O-10V - PWM - DALI

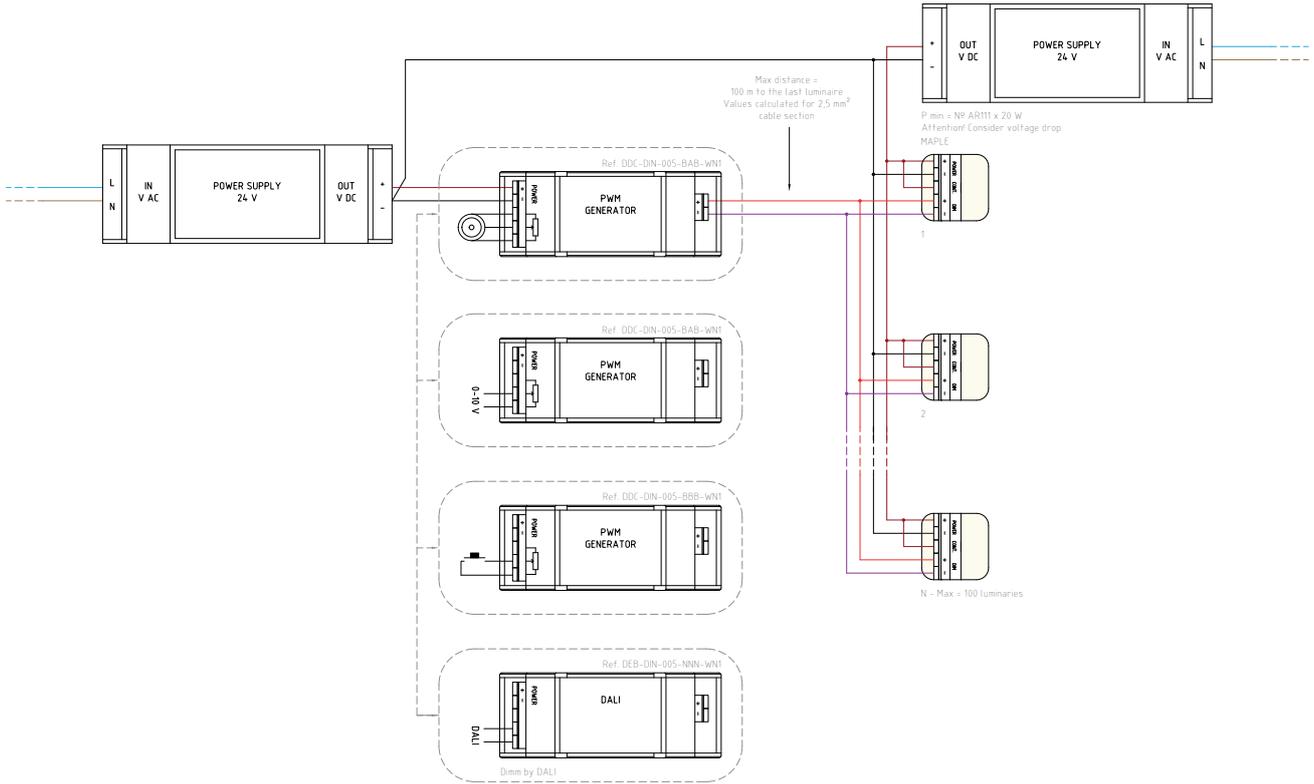

Esquema | Diagram DMX

