



Orbital Motors
Type OMP, OMR
and OMH

Technical
Information



Revision View

Date	Page	Changed	Revision
Mar 2006		Small updates	B
Jun 2007	all	Major revision with new lit-number (minus OMEW, will be prepared separately)	CA
Mar 2010	96	Japan location	CC
Sep 2010	96	New back cover	CD
Sep 2011	48	Typo	CE
Nov 2012	5	Planetary Gears deleted	CF

Contents

OMP, OMR and OMH	6
Speed, torque and output.....	6

OMP	8
Versions.....	8
Code numbers.....	9
Technical data.....	10
Technical data (e.g. speed, torque, pressure etc.)	10
Max. permissible shaft seal pressure	14
Pressure drop in motor, oil flow in drain line, direction of shaft rotation	15
Permissible shaft loads.....	16
Function diagrams.....	20
Shaft version	27
Port thread versions	29
Dimensions.....	30

OMR	40
Versions.....	40
Code Numbers	41
Technical data.....	42
Technical data (e.g. speed, torque, pressure etc.)	42
Max. permissible shaft seal pressure	46
Pressure drop in motor, oil flow in drain line, direction of shaft rotation	47
Permissible shaft load.....	48
Function diagrams.....	51
Shaft version	56
Port thread versions	60
Dimensions.....	61


© 2011 Sauer-Danfoss. All rights reserved.

Sauer-Danfoss accepts no responsibility for possible errors in catalogs, brochures and other printed material. Sauer -Danfoss reserves the right to alter its products without prior notice. This also applies to products already ordered provided that such alterations can be made without affecting agreed specifications. All trademarks in this material are properties of their respective owners. Sauer-Danfoss, the Sauer-Danfoss logotype, the Sauer-Danfoss S-icon, PLUS+1™, What really matters is inside® and Know-How in Motion™ are trademarks of the Sauer-Danfoss Group.

Front cover illustrations: F301 213, F301 214, F301 215, F301 228, F301 229, F301 230 Drawing: 151-1837

Contents

OMH.....	76
Versions.....	76
Code Numbers	77
Technical data.....	78
Technical data (e.g. speed, torque, pressure etc.).....	78
Max. permissible shaft seal pressure.....	81
Pressure drop in motor, oil flow in drain line, direction of shaft	82
Permissible shaft loads for OMH.....	83
Function diagrams	84
Shaft version	87
Port thread versions	90
Dimensions.....	91
Weight of motors	93-95

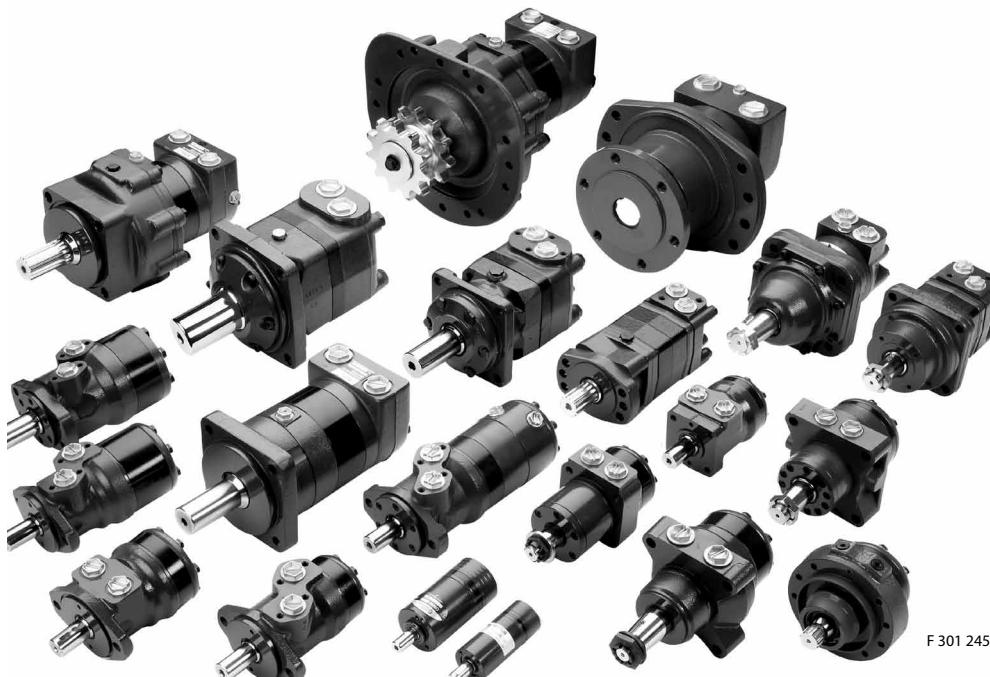

A Wide Range of Hydraulic Motors

Sauer-Danfoss is a world leader within production of low speed hydraulic motors with high torque. We can offer more than 3000 different hydraulic motors, categorised in types, variants and sizes (incl. different shaft versions).

The motors vary in size (rated displacement) from 8 cm³ [0.50 in³] to 800 cm³ [48.9 in³] per revolution.

Speeds range up to approx. 2500 min⁻¹ (rpm) for the smallest type and up to approx 600 min⁻¹ (rpm) for the largest type.

Maximum operating torques vary from 13 Nm [115 lbf-in] to 2700 Nm [24.000 lbf-in] (peak) and maximum outputs are from 2.0 kW [2.7 hp] to 70 kW [95 hp].

Characteristic features:

- Smooth running over the entire speed range
- Constant operating torque over a wide speed range
- High starting torque
- High return pressure without the use of drain line (High pressure shaft seal)
- High efficiency
- Long life under extreme operating conditions
- Robust and compact design
- High radial and axial bearing capacity
- For applications in both open and closed loop hydraulic systems
- Suitable for a wide variety of hydraulics fluids



OMP, OMR and OMH Technical Information

A Wide Range of Hydraulics Motors

The programme is characterised by technical features appealing to a large number of applications and a part of the programme is characterised by motors that can be adapted to a given application. Adoptions comprise the following variants among others:

- Motors with corrosion resistant parts
- Wheel motors with recessed mounting flange
- OMP, OMR- motors with needle bearing
- OMR motor in low leakage version
- OMR motors in a super low leakage version
- Short motors without bearings
- Ultra short motors
- Motors with integrated positive holding brake
- Motors with integrated negative holding brake
- Motors with integrated flushing valve
- Motors with speed sensor
- Motors with tacho connection
- All motors are available with black finish paint

The Sauer–Danfoss LSHT motors are used in the following application areas:

- Construction equipment
- Agricultural equipment
- Material handling & Lifting equipment
- Forestry equipment
- Lawn and turf equipment
- Special purpose
- Machine tools and stationary equipment
- Marine equipment


Survey of Literature with Technical Data on Sauer-Danfoss Hydraulic Motors

Detailed data on all Sauer-Danfoss motors can be found in our motor catalogue, which is divided into 8 individual subcatalogues:

- General information on Sauer-Danfoss hydraulic motors: function, use, selection of hydraulic motor, hydraulic systems, etc.
- Technical data on small motors: OML and OMM
- Technical data on medium sized motors: OMP, OMR and OMH
- Technical data on medium sized motors: DH and DS
- Technical data on medium sized motors: OMEW
- Technical data on large motors: OMS, OMT and OMV
- Technical data on large motors: TMK
- Technical data on large motors: TMT
- Technical data on large motors: TMVW

A general survey brochure on Sauer-Danfoss hydraulic motors gives a quick motor reference based on power, torque, speed and capabilities.

Speed, Torque and Output

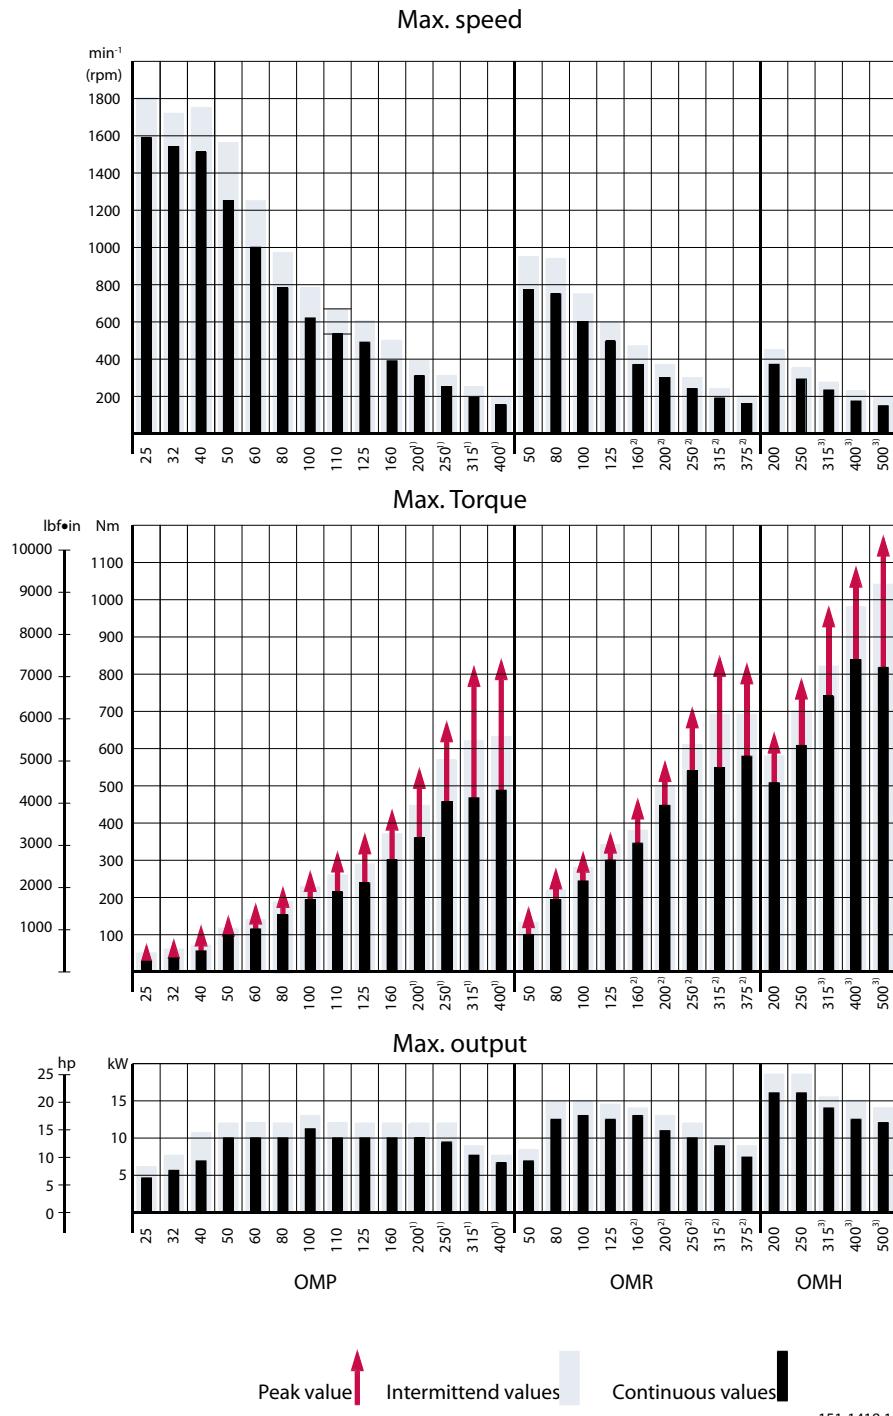

- 1) 1 1/4 in shaft
- 2) 1 1/4 in or 1 1/4 in tapered shaft
- 3) 1 1/4 in splined shaft



OMP, OMR and OMH
Technical Information
A Wide Range of Hydraulics Motors

Speed, Torque and Output

The bar diagrams above are useful for a quick selection of relevant motor size for the application. The final motor size can be determined by using the function diagram for each motor size.

- OMP and OMPW can be found on pages 20 - 26
- OMR and OMRW can be found on pages 51 - 55
- OMH can be found on pages 84 - 86

The function diagrams are based on actual tests on a representative number of motors from our production. The diagrams apply to a return pressure between 5 and 10 bar [75 and 150 psi] when using mineral based hydraulic oil with a viscosity of 35 mm²/s [165 SUS] and a temperature of 50°C [120°F]. For further explanation concerning how to read and use the function diagrams, please consult the paragraph "Selection of motor size" in the technical information "General Orbital Motors" 520L0232 Rev. B.

Versions

Mounting flange	Spigot diameter (front / rear end)	Bolt circle diameter (BC)	Shaft	Port size	European version	US version	Side port version	End port version	Flange port version	Standard shaft seal	High pressure shaft seal	Drain connection	Check valve	Main type designation
2 hole oval flange (A2-flange)	$\varnothing 82.5 \text{ mm}$ [3.25 in]	$\varnothing 106.4 \text{ mm}$ [4.20 in]	Cyl. 25 mm	G $\frac{1}{2}$	●		●				●	No	No	OMP
				G $\frac{1}{2}$	●		●				●	Yes	No	OMP
				G $\frac{1}{2}$	●			●		●		Yes	Yes	OMP
			Cyl. 1 inch	G $\frac{1}{2}$	●		●				●	No	No	OMP
				G $\frac{1}{2}$	●		●				●	Yes	No	OMP
			Splined 1 inch	$\frac{7}{8}-14 \text{ UNF}$		●	●			●		Yes	Yes	OMP
				G $\frac{1}{2}$	●		●				●	No	No	OMP
				G $\frac{1}{2}$	●		●				●	Yes	No	OMP
4 hole oval flange (A4-flange)	$\varnothing 82.5 \text{ mm}$ [3.25 in]	$\varnothing 106.4 \text{ mm}$ [4.20 in]	Cyl. 32 mm	G $\frac{1}{2}$	●		●			●		Yes	Yes	OMP
Square flange (C-flange)	$\varnothing 44.4 \text{ mm}$ [1.75 in]	$\varnothing 82.5 \text{ mm}$ [3.25 in]	Cyl. 25 mm	G $\frac{1}{2}$	●			●		●		Yes	Yes	OMP
				$\frac{7}{8}-14 \text{ UNF}$		●	●			●		Yes	Yes	OMP
				$\frac{1}{2}-14 \text{ NPTF}$		●	●			●		Yes	Yes	OMP
Wheel	$\varnothing 80 \text{ mm}$ [3.15 in]	$\varnothing 103 \text{ mm}$ [4.06 in]	Cyl. 25 mm	G $\frac{1}{2}$	●				●	●		Yes	Yes	OMPW
OMP motors with corrosion resistant parts														
2 hole oval flange (A2-flange)	$\varnothing 82.5 \text{ mm}$ [3.25 in]	$\varnothing 106.4 \text{ mm}$ [4.20 in]	Cyl. 25 mm	G $\frac{1}{2}$	●		●			●		Yes	Yes	OMP C
OMP motors with needle bearings														
2 hole oval flange (A2-flange)	$\varnothing 82.5 \text{ mm}$ [3.25 in]	$\varnothing 106.4 \text{ mm}$ [4.20 in]	Cyl. 25 mm	G $\frac{1}{2}$	●		●			●		Yes	Yes	OMP N
Wheel	$\varnothing 80 \text{ mm}$ [3.15 in]	$\varnothing 103$ [4.06]	Tap. 28.5 mm	G $\frac{1}{2}$	●				●	●		Yes	Yes	OMPW N
OMP motors with free running gerotor														
2 hole oval flange (A2-flange)	$\varnothing 82.5 \text{ mm}$ [3.25 in]	$\varnothing 106.4 \text{ mm}$ [4.20 in]	Cyl. 25 mm	G $\frac{1}{2}$	●		●				●	Yes	No	OMP
Functions diagram - see page: →														

Features available (options):
 Low leakage (low speed valve)
 Speed sensor
 Viton shaft seal
 Reverse rotation
 Painted



OMP
Technical Information
Code Numbers

Code Numbers

Code numbers	Displacement [cm ³]														Technical data - Page	Dimensions - Page
	25	32	40	50	60	80	100	110	125	160	200	250	315	400		
151-	0340	0341	0342	0310	0319	0311	0312	-	0313	0314	0315	0316	0317	0318	10	30
151-	0640	0641	0642	0610	-	0611	0612	0646	0613	0614	0615	0616	0617	0618	10	31
151-	-	-	-	5191	-	5192	5193	-	5194	5195	5196	5197	5198	5199	10	33
151-	-	-	-	0300	-	0301	0302	-	0303	0304	0305	0306	0307	0308	10	30
151-	-	-	-	0600	-	0601	0602	-	0603	0604	0605	0606	0607	0608	10	31
151-	7080	7081	7082	7041	-	7042	7043	-	7044*	7045	7046	7047	7048	7049	10	34
151-	-	-	-	0330	-	0331	0332	-	0333	0334	0335	0336	0337	0338	12	30
151-	-	-	-	0630	-	0631	0632	-	0633	0634	0635	0636	0637	0638	12	31
151-	-	5010	-	5001	-	5002	5003	-	5004	5005	5006	5007	5008	5009	13	35
151-	-	-	-	5211	-	5212	5213	-	5214	5215	5216	5217	5218	5219	10	36
151-	-	-	-	7061	-	7062	7063	-	5174	7065	7066	7067	7068	7069	10	37
151-	-	-	-	7021	-	7022	7023	-	7024	7025	7026	7027	7028	7029	10	37
151-	-	-	-	7101	-	7102	7103	-	7104	7105	7106	7107	7108	7109	10	38
OMP motors with corrosion resistant parts																
151-	-	-	-	1208	-	1209	1210	-	1217	1211	1212	1213	1214	1215	10	32
OMP motors with needle bearings																
151-	-	-	-	5311	-	5312	5313	-	-	5315	5316	-	5318	-	10	32
151-	-	-	-	5301	-	5302	5303	-	5304	5305	5306	5307	5308	5309	12	38
OMP motors with free running gerotor																
151-	-	-	-	-	-	-	0622	-	-	0624	0625	-	0627	-	10	31
	20	20	21	21	22	22	23	23	24	24	25	25	26	26		

* Motor painted black

Ordering

Add the four digit prefix "151-" to the four digit numbers from the chart for complete code number.

Example:

151-0305 for an OMP 200 with A2 flange, cyl. 1 in shaft, port size G 1/2 and high pressure shaft seal.

Orders will not be accepted without the four digit prefix.

Technical data for OMP with 25 mm and 1 in cylindrical shaft

Type		OMP	OMP	OMP	OMP	OMP	OMP	OMP
Motor size		25	32	40	50	60	80	100
Geometric displacement	cm ³ [inch]	25.0 [1.53]	32.0 [1.96]	40.0 [2.45]	48.6 [2.97]	59.1 [3.61]	77.8 [4.76]	97.3 [5.95]
Max. speed	min ⁻¹ [rpm]	1600 int. ¹⁾	1560	1500	1230	1000	770	615
Max. torque	N·m [lbf·in]	cont. int. ¹⁾	33 [290]	43 [380]	52 [460]	93 [820]	115 [1020]	150 [1330]
Max. output	kW [hp]	peak ²⁾	47 [420]	61 [540]	74 [660]	120 [1060]	140 [1240]	190 [1680]
Max. pressure drop	bar [psi]	cont. int. ¹⁾	67 [590]	86 [760]	107 [950]	140 [1240]	180 [1590]	220 [1950]
Max. oil flow	l/min [US gal/min]	peak ²⁾	4.5 [6.0]	5.8 [7.8]	7.0 [9.4]	10.0 [13.4]	10.0 [13.4]	11.0 [14.8]
Max. starting pressure with unloaded shaft	bar [psi]	cont. int. ¹⁾	6.1 [8.2]	7.8 [10.5]	10.6 [14.2]	12.0 [16.1]	12.0 [16.1]	13.0 [17.4]
Min starting torque	standard at max. press drop cont. N·m [lbf·in]	100 [1450]	100 [1450]	100 [1450]	140 [2030]	140 [2030]	140 [2030]	140 [2030]
	free running gerotor	140 [2030]	140 [2030]	140 [2030]	175 [2540]	175 [2540]	175 [2540]	175 [2540]
	at max. press.drop int. ¹⁾ N·m [lbf·in]	225 [3260]	225 [3260]	225 [3260]	225 [3260]	225 [3260]	225 [3260]	225 [3260]

¹⁾ Intermittent operation: the permissible values may occur for max. 10% of every minute.

²⁾ Peak load: the permissible values may occur for max. 1% of every minute.

Technical data for OMP with 25 mm and 1 in cylindrical shaft (continued)

Type		OMP	OMP	OMP	OMP	OMP	OMP	OMP
Motor size		110	125	160	200	250	315	400
Geometric displacement	cm ³ [inch]	112.5 [6.87]	125.0 [7.65]	155.7 [9.53]	194.6 [11.91]	242.3 [14.83]	306.1 [18.73]	389.2 [23.82]
Max. speed	min ⁻¹ [rpm]	535 int ¹⁾	480	385	310	250	195	155
Max. torque	N·m [lbf·in]	215 [1900] int ¹⁾	240 [2120]	300 [2660]	300 [2660]	300 [2660]	300 [2660]	300 [2660]
Max. output	kW [hp]	260 [2300] peak ²⁾	290 [2570]	370 [3280]	380 [3360]	410 [3630]	390 [3450]	420 [3720]
Max. pressure drop	bar [psi]	320 [2830] cont.	370 [3280]	430 [3810]	540 [4780]	550 [4870]	600 [5310]	600 [5310]
Max. oil flow	l/min [US gal/min]	10 [13.4] int ¹⁾	10 [13.4]	10 [13.4]	8.0 [10.7]	6.0 [8.1]	5.0 [6.7]	4.0 [5.4]
Max. starting pressure with unloaded shaft	bar [psi]	12.0 [16.1] cont.	12.0 [16.1]	12.0 [16.1]	11.0 [14.8]	9.0 [12.1]	7.0 [9.4]	6.0 [8.1]
Min starting torque	standard	140 [2030] int ¹⁾	140 [2030]	140 [2030]	115 [1670]	90 [1310]	75 [1090]	60 [870]
	free running gerotor	175 [2540] peak ²⁾	175 [2540]	175 [2540]	150 [2180]	125 [1810]	100 [1450]	80 [1160]
	at max. press drop cont. N·m [lbf·in]	225 [3260]	225 [3260]	225 [3260]	225 [3260]	180 [2610]	160 [2320]	130 [1890]
	at max. press.drop int. ¹⁾ N·m [lbf·in]	60 [15.9] int ¹⁾	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]
		75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]
		10 [145]	9 [130]	7 [100]	5 [75]	5 [75]	5 [75]	5 [75]
		-	2 [29]	2 [29]	2 [29]	-	-	-

¹⁾ Intermittent operation: the permissible values may occur for max. 10% of every minute.

²⁾ Peak load: the permissible values may occur for max. 1% of every minute.

Technical data for OMP with 1 in splined and 28.5 mm tapered shaft

Type		OMP	OMP	OMP	OMP	OMP	OMP	OMP	OMP	
Motor size		50	80	100	125	160	200	250	315	400
Geometric displacement	cm ³ [inch]	48.6 [2.97]	77.8 [4.76]	97.3 [5.95]	125.0 [7.65]	155.7 [9.53]	194.6 [11.91]	242.3 [14.83]	306.1 [18.73]	389.2 [23.82]
Max. speed	min ⁻¹ [rpm]	cont. int ¹⁾	1230 1540	770 960	615 770	480 600	385 480	310 385	250 310	195 245
Max. torque	N·m [lbf·in]	cont. int ¹⁾ peak ²⁾	93 [820] 120 [1060] 140 [1240]	150 [1330] 190 [1680] 220 [1950]	190 [1680] 230 [2040] 270 [2390]	240 [2120] 290 [2570] 370 [3280]	300 [2660] 370 [3280] 430 [3810]	360 [3190] 450 [3980] 540 [4780]	360 [3190] 460 [4070] 550 [4870]	360 [3190] 470 [4160] 540 [4780]
Max. output	kW [hp]	cont. int ¹⁾	10.0 [13.4] 12.0 [16.1]	10.0 [13.4] 12.0 [16.1]	11.0 [14.8] 13 [17.4]	10.0 [13.4] 12.0 [16.1]	10.0 [13.4] 12.0 [16.1]	8.0 [10.7] 10.5 [14.1]	6.0 [8.0] 7.5 [10.1]	5.0 [6.7] 6.0 [8.0]
Max. pressure drop	bar [psi]	cont. int ¹⁾ peak ²⁾	140 [2030] 175 [2540] 225 [3260]	140 [2030] 175 [2540] 225 [3260]	140 [2030] 175 [2540] 225 [3260]	140 [2030] 175 [2540] 225 [3260]	140 [2030] 175 [2540] 225 [3260]	105 [1520] 140 [2030] 180 [2610]	90 [1310] 120 [1740] 160 [2320]	70 [1020] 90 [1310] 130 [1890]
Max. oil flow	l/min [US gal/min]	cont. int ¹⁾	60 [15.9] 75 [19.8]							
Max. starting pressure with unloaded shaft	bar [psi]		10 [145]	10 [145]	10 [145]	9 [130]	7 [100]	5 [75]	5 [75]	5 [75]
Min starting torque	at max. press drop cont. N·m [lbf·in]	80 [710]	135 [1200]	170 [1510]	210 [1860]	280 [2480]	340 [3010]	330 [2920]	340 [3010]	345 [3050]
	at max. press.drop int ¹⁾ N·m [lbf·in]	100 [890]	170 [1510]	210 [1860]	270 [2390]	350 [3100]	420 [3720]	440 [3890]	450 [3980]	425 [3760]

¹⁾ Intermittent operation: the permissible values may occur for max. 10% of every minute.

²⁾ Peak load: the permissible values may occur for max. 1% of every minute.



OMP
Technical Information
Technical Data

Technical data for OMP with 32 mm cylindrical shaft

Type		OMP	OMP	OMP	OMP	OMP	OMP	OMP	OMP	
Motor size		50	80	100	125	160	200	250	315	400
Geometric displacement	cm ³ [inch]	48.6 [2.97]	77.8 [4.76]	97.3 [5.95]	125.0 [7.65]	155.7 [9.53]	194.6 [11.91]	242.3 [14.83]	306.1 [18.73]	389.2 [23.82]
Max. speed	min ⁻¹ [rpm]	cont. int ¹⁾	1230 1540	770 960	615 770	480 600	385 480	310 385	250 310	195 245
Max. torque	N·m [lbf·in]	cont.	93 [820]	150 [1330]	190 [1680]	240 [2120]	300 [2660]	360 [3190]	460 [4070]	470 [4160]
		int. ¹⁾	120 [1060]	190 [1680]	230 [2040]	290 [2570]	370 [3280]	450 [3980]	570 [5050]	620 [5490]
		peak ²⁾	140 [1240]	220 [1950]	270 [2390]	370 [3280]	430 [3810]	540 [4780]	670 [5930]	820 [7260]
Max. output	kW [hp]	cont.	10.0 [13.4]	10.0 [13.4]	11.0 [14.8]	10.0 [13.4]	10.0 [13.4]	9.5 [12.7]	7.5 [10.1]	6.5 [8.7]
		int. ¹⁾	12.0 [16.1]	12.0 [16.1]	13.0 [17.4]	12.0 [16.1]	12.0 [16.1]	12.0 [16.1]	9.0 [12.1]	7.5 [10.1]
Max. pressure drop	bar [psi]	cont.	140 [2030]	140 [2030]	140 [2030]	140 [2030]	140 [2030]	140 [2030]	120 [1740]	95 [1380]
		int ¹⁾	175 [2540]	175 [2540]	175 [2540]	175 [2540]	175 [2540]	175 [2540]	160 [2320]	125 [1810]
		peak ²⁾	225 [3260]	225 [3260]	225 [3260]	225 [3260]	225 [3260]	225 [3260]	225 [3260]	180 [2610]
Max. oil flow	l/min [US gal/min]	cont.	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]
		int. ¹⁾	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]
Max. starting pressure with unloaded shaft	bar [psi]		10 [145]	10 [145]	10 [145]	9 [130]	7 [100]	5 [75]	5 [75]	5 [75]
Min starting torque	at max. press drop cont. N·m [lbf·in]		80 [710]	135 [1200]	170 [1510]	210 [1860]	280 [2480]	340 [3010]	420 [3720]	460 [4070]
	at max. press.drop int. ¹⁾ N·m [lbf·in]		100 [890]	170 [1510]	210 [1860]	270 [2390]	350 [3100]	420 [3720]	530 [4690]	600 [5310]

Type		Max. inlet pressure			Max.return pressure with drain line	
OMP 25 - 400	bar [psi]	cont			175 [2540]	
	bar [psi]	int. ¹⁾			200 [2900]	
	bar [psi]	peak ²⁾			225 [3260]	

¹⁾ Intermittent operation: the permissible values may occur for max. 10% of every minute.


²⁾ Peak load: the permissible values may occur for max. 1% of every minute.

OMP
Technical Information
Technical Data - Max. Permissible Shaft Seal Pressure

**OMP with HIGH Pressure
Shaft Seal (HPS)**


OMP with HPS and without drain connection:
The shaft seal pressure equals the average of input pressure and return pressure.

$$P_{\text{seal}} = \frac{P_{\text{in}} + P_{\text{return}}}{2}$$




151-1743.10

OMP with HPS and drain connection:
The shaft seal pressure equals the pressure in the drain line.



151-1855.10


Max. permissible shaft seal pressure

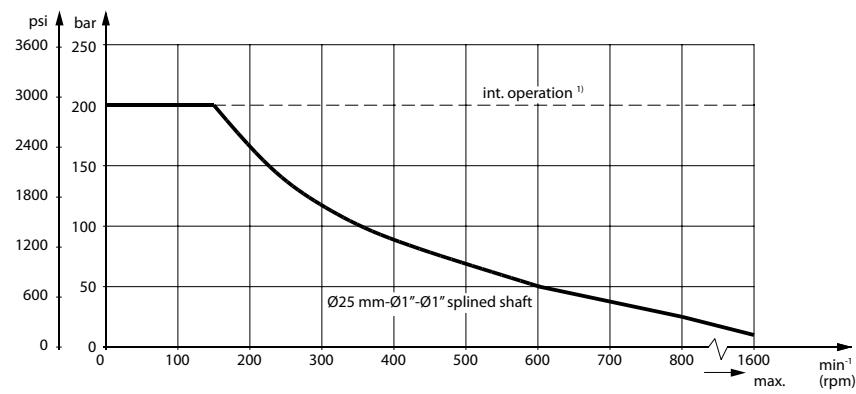

151-1745.10

OMP with Standard Shaft Seal


OMP with standard shaft seal, check valves and without use of drain connection:
The pressure on the shaft seal never exceeds the pressure in the return line



151-320.10

OMP with standard shaft seal, check valves and with drain connection:
The shaft seal pressure equals the pressure on the drain line.


Max. return pressure without drain line or max. pressure in the drain line

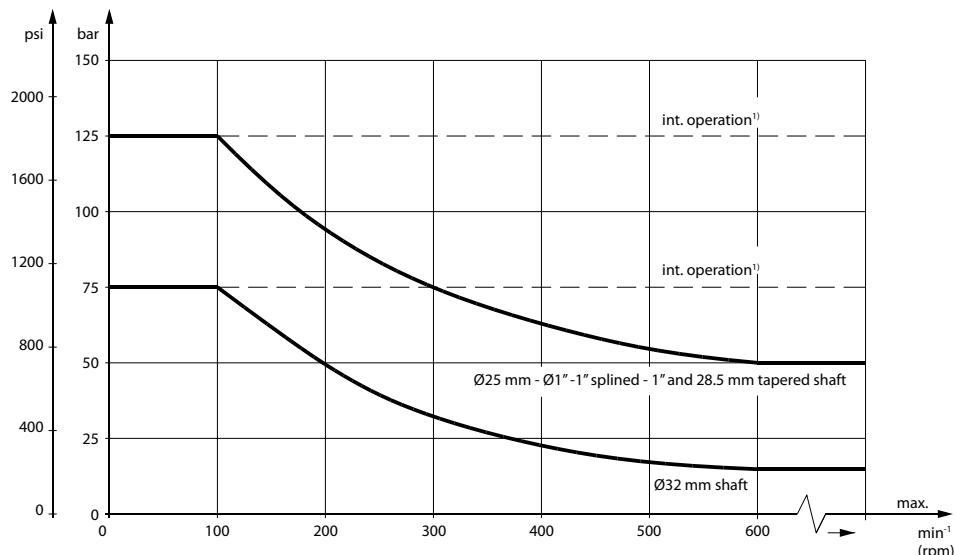

151-1563.10

1) Intermittent operation: the permissible values may occur for max. 10% of every minute.

Pressure Drop in Motor

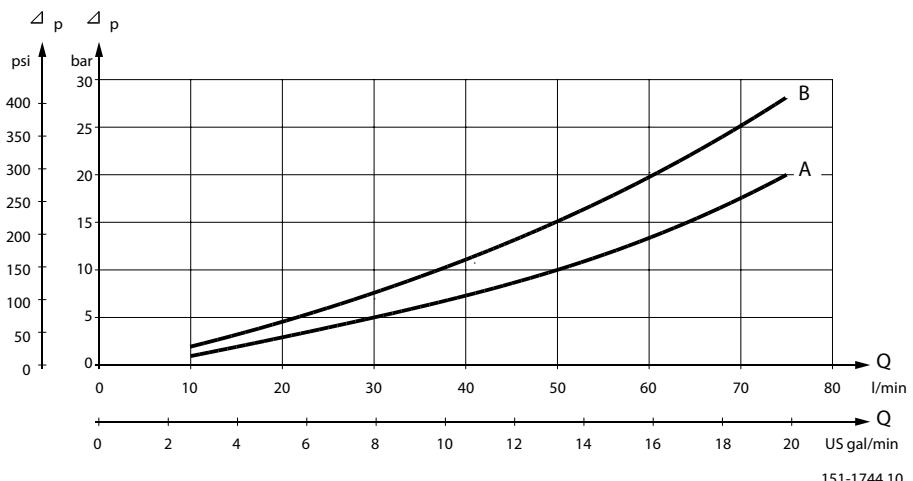

The curve applies to an unloaded motor shaft and an oil viscosity of 35 mm²/s [165 SUS]


- A: OMP 50 - 400
B: OMP 25 - 40 / OMPW

Oil Flow in Drain Line

The table shows the max. oil flow in the drain line at a return pressure less than 5-10 bar [75-150 psi].

Pressure drop bar [psi]	Viscosity mm ² /s [SUS]	Oil flow in drain line l/min [US gal/min]
100 [1450]	20 [100]	2.5 [0.66]
	35 [165]	1.8 [0.78]
140 [2030]	20 [100]	3.5 [0.93]
	35 [165]	2.8 [0.74]

Direction of Shaft Rotation

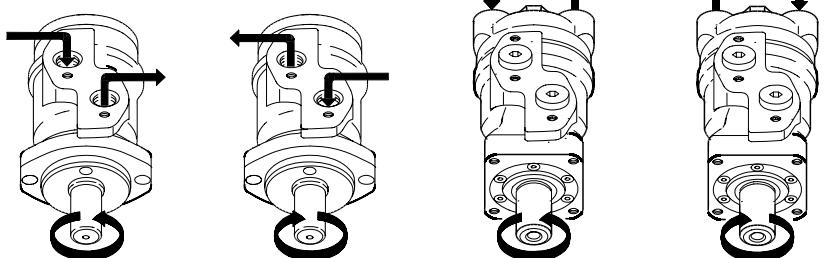

151-1836.10

The permissible radial shaft load (P_R) depends on


- Speed (n)
- Distance (L) from the point of load to the mounting flange
- Mounting flange version
- Shaft version

Mounting flange	4-oval flange** 2-hole oval flange (European version)	4-hole oval flange	Square flange** 2-hole oval flange (US-version)
Shaft version	25 mm cylindrical shaft 1 in cylindrical shaft 1 in splined shaft	32 mm cylindrical shaft	25 mm cylindrical shaft
Permissible shaft load (P_R) - l in mm	$\frac{800}{n} \cdot \frac{250000}{95 + L}$ N*	$\frac{800}{n} \cdot \frac{187500}{95 + L}$ N*	$\frac{800}{n} \cdot \frac{250000}{101 + L}$ N*
Permissible shaft load (P_R) - l in inch	$\frac{800}{n} \cdot \frac{2215}{3.74 + L}$ lbf*	$\frac{800}{n} \cdot \frac{1660}{3.74 + L}$ lbf*	$\frac{800}{n} \cdot \frac{2215}{3.98 + L}$ lbf*

* $n \geq 200 \text{ min}^{-1}$ [rpm]; $\leq 55 \text{ mm}$ [2.2 in]

$n < 200 \text{ min}^{-1}$ [rpm]; $=> P_{Rmax} = 8000 \text{ N}$ [1800 lbf]

** For both European and US-version

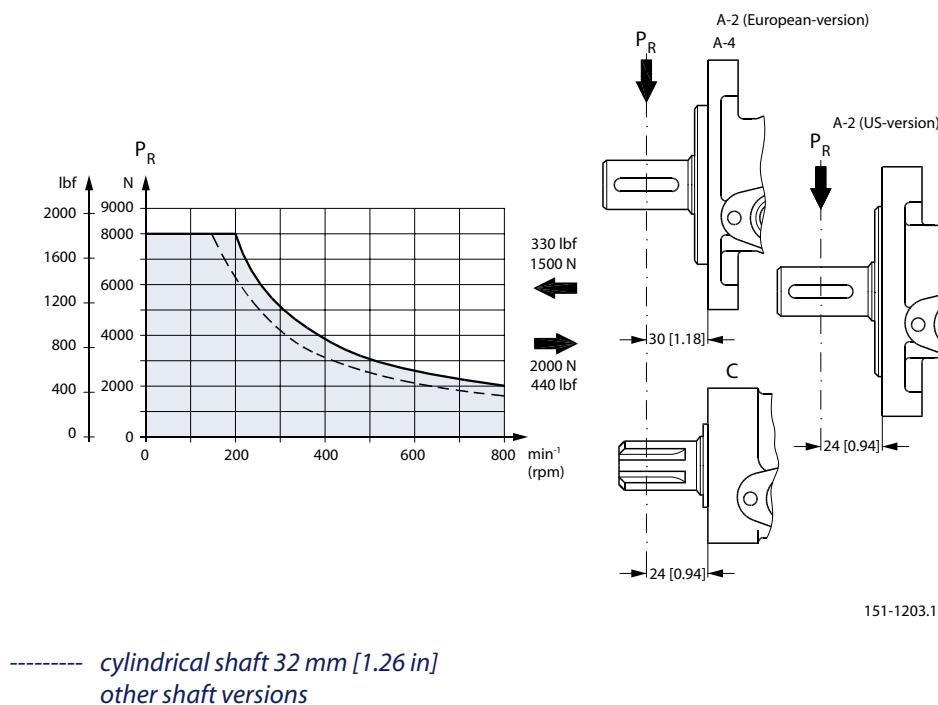

151-1203.10


----- cylindrical shaft 32 mm [1.26 in]
_____ other shaft versions

The curve shows the relation between P_R and n

- when $l = 30 \text{ mm}$ [1.18 in] for motors with A2 (European version) and A4 oval mounting flange
- when $l = 24 \text{ mm}$ [0.94 in] for motors with square mounting flange and A2 (US version)

For applications with special performance requirements we recommend OMP with the output shaft running in needle bearings.

**Permissible Shaft Load
for OMP N**

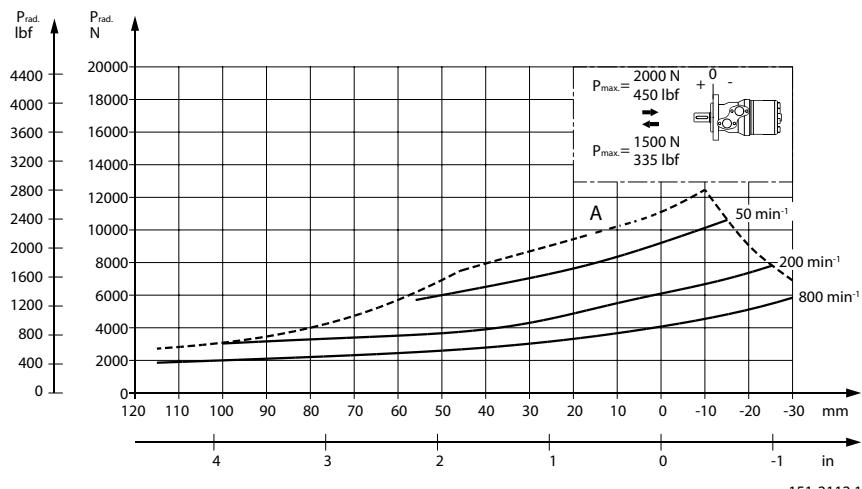

151-2112.10

The output shaft on OMP N can be offered in needle bearings. These bearings and the recessed mounting flange allow a higher permissible radial load in comparison to OMP motors.


The permissible radial load on the shaft is shown for different speeds as a function of the distance from the mounting flange to the point of load application.

Curve A indicates the max. radial shaft load. Any shaft load exceeding the values quoted in curve A will involve risk of breakage.

The other curves apply to a B10 bearing life of 2000 hours at the number of revolutions indicated by the curve letter. Mineral based hydraulic oil with a sufficient content of anti-wear additives must be used.

Bearing life calculations can be made using the explanation and formula provided in the chapter "Bearing dimensioning" in the technical information "General Orbital Motors" 520L0232 Rev. B.

**Permissible Shaft Load
for OMPW with Slide
Bearings**

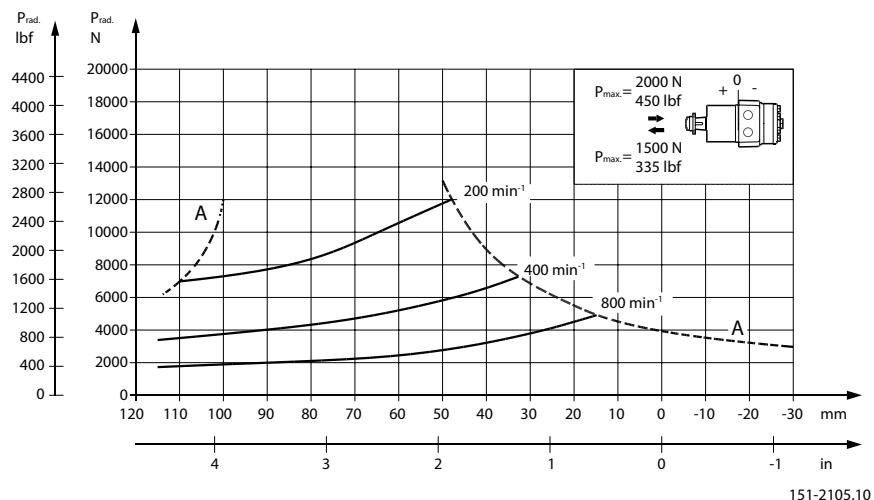

151-2105.10


The output shaft on OMPW can be offered in slide bearings similar to the other OMP-motors. The permissible higher radial load is therefore due to the recessed mounting flange moving the point of load closer to the motor bearings.

The permissible radial load on the shaft is shown for different speeds as a function of the distance from the mounting flange to the point of load application.

The curves are not based on calculations of B10 bearing life. They represent absolute limits that must not be exceeded.

Curve A indicates the max. radial shaft load. Any shaft load exceeding the values quoted in curve A will involve risk of breakage.

**Permissible Shaft Load
for OMPW N with Needle
Bearing**

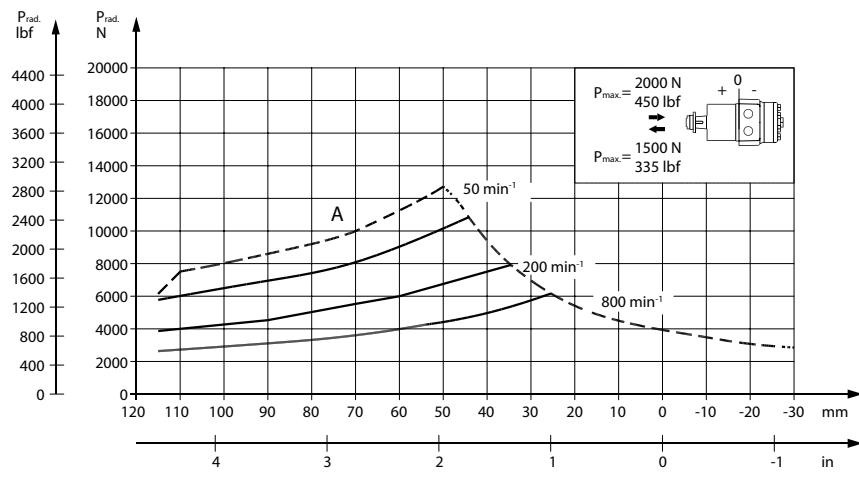

151-2106.10

The output shaft on OMPW N can be offered in needle bearings. These bearings and the recessed mounting flange allow a higher permissible radial load in comparison to OMP motors.



The permissible radial load on the shaft is shown for different speeds as a function of the distance from the mounting flange to the point of load application.

Curve A indicates the max. radial shaft load. Any shaft load exceeding the values quoted in curve A will involve risk of breakage.

The other curves apply to a B10 bearing life of 2000 hours at the number of revolutions indicated by the curve letter. Mineral based hydraulic oil with a sufficient content of anti-wear additives must be used.

Bearing life calculations can be made using the explanation and formula provided in the chapter "Bearing dimensioning" in the technical information "General Orbital Motors" 520L0232 Rev. B.

Function Diagrams

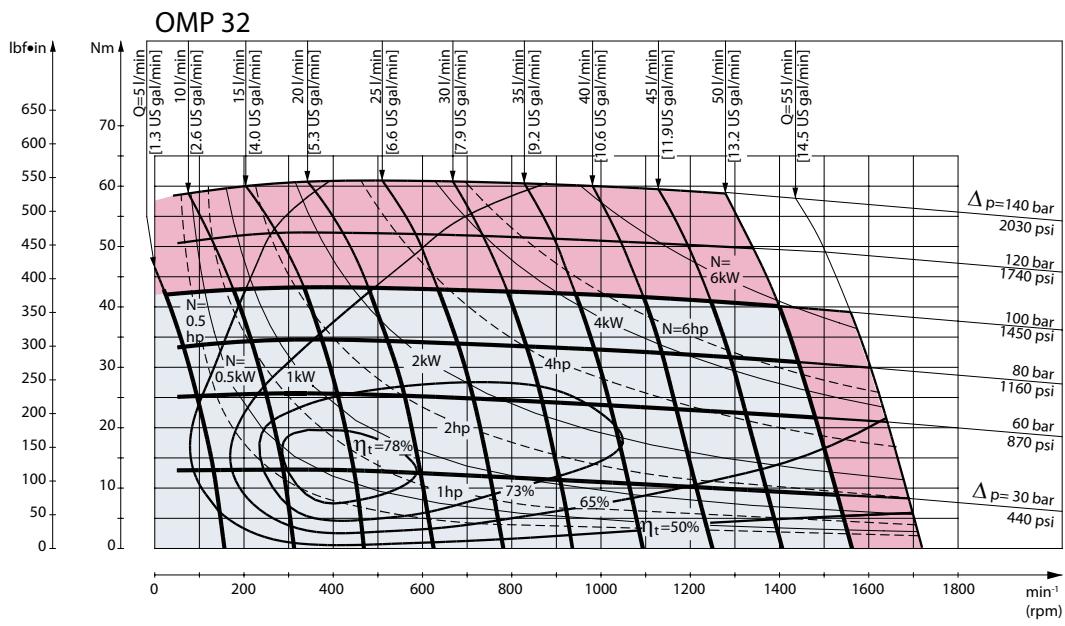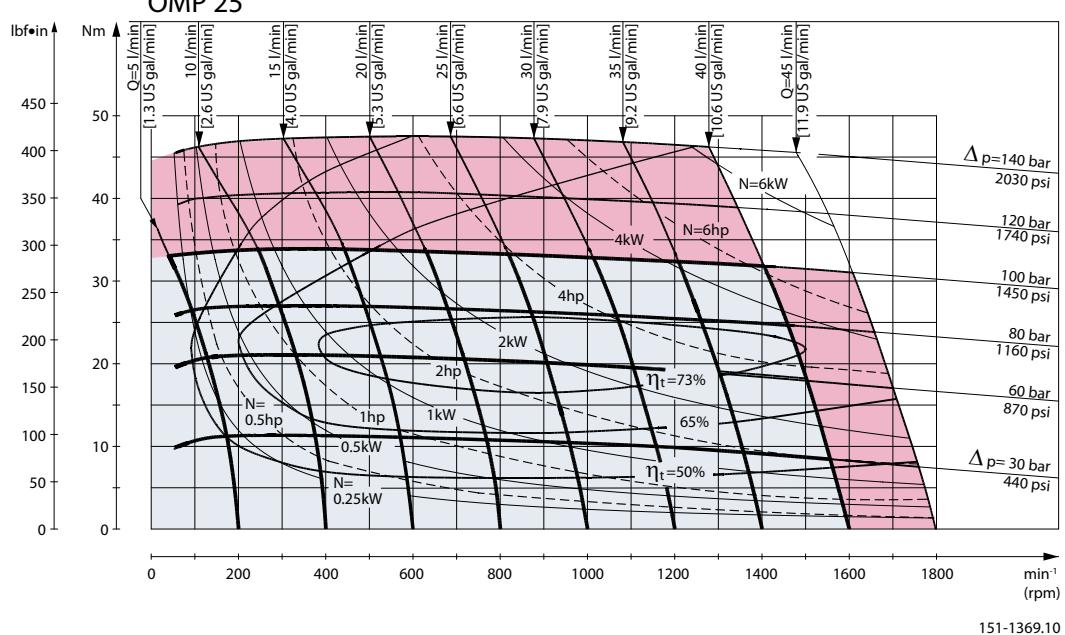

Explanation of function diagram use, basis and conditions can be found on page 7.



■ Continuous range

■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/intermittent pressure drop for the actual shaft version can be found on page 10-13.

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

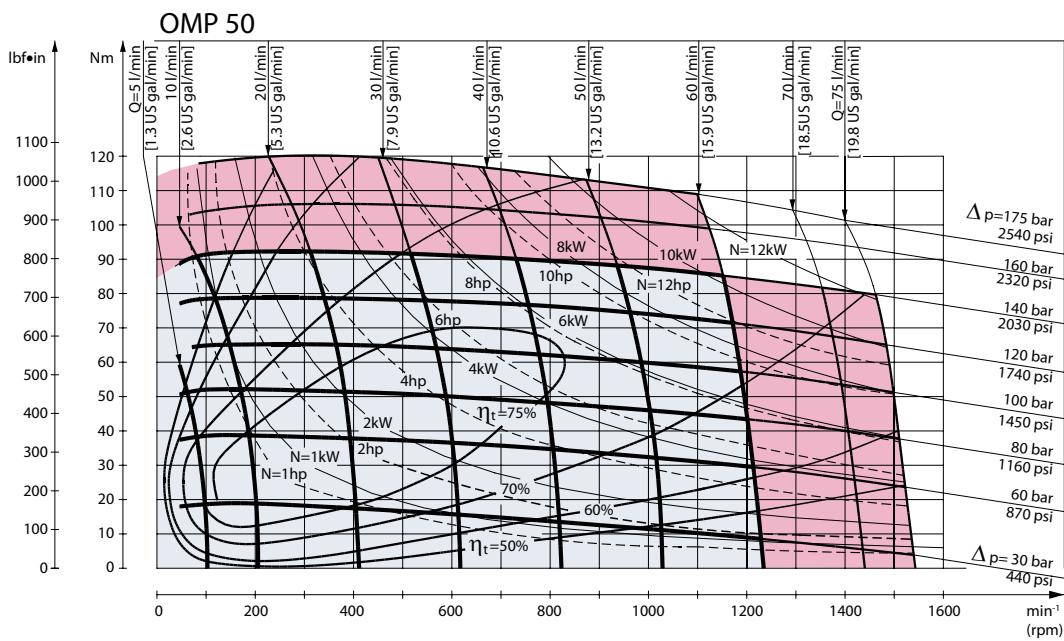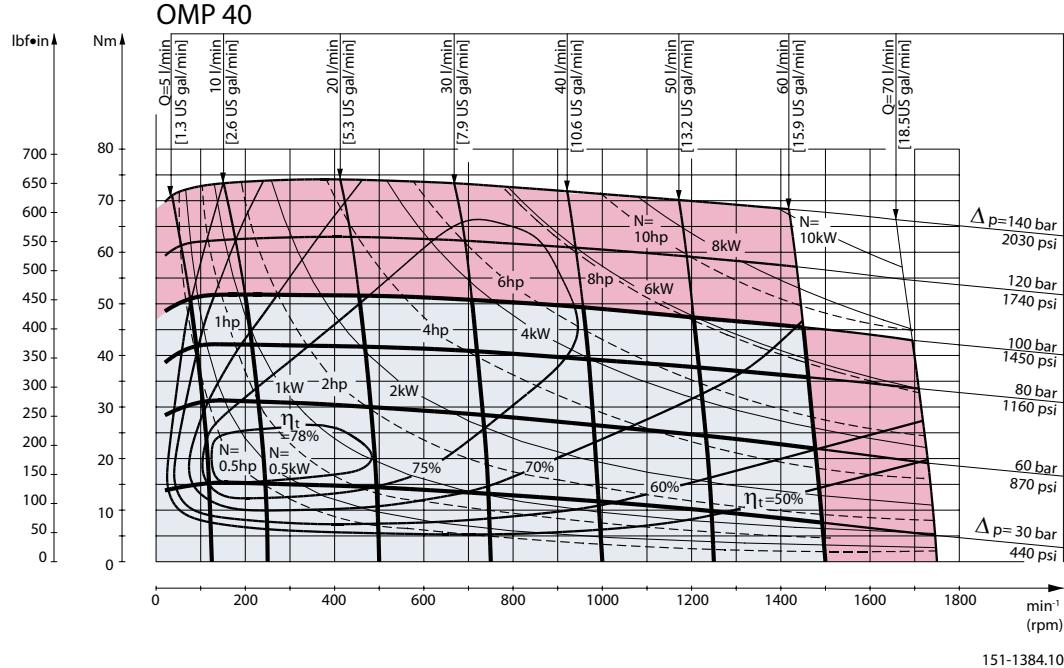

Explanation of function diagram use, basis and conditions can be found on page 7.

■ Continuous range


■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/interruption pressure drop for the actual shaft version can be found on page 10-13.

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

OMP 60 under preparation

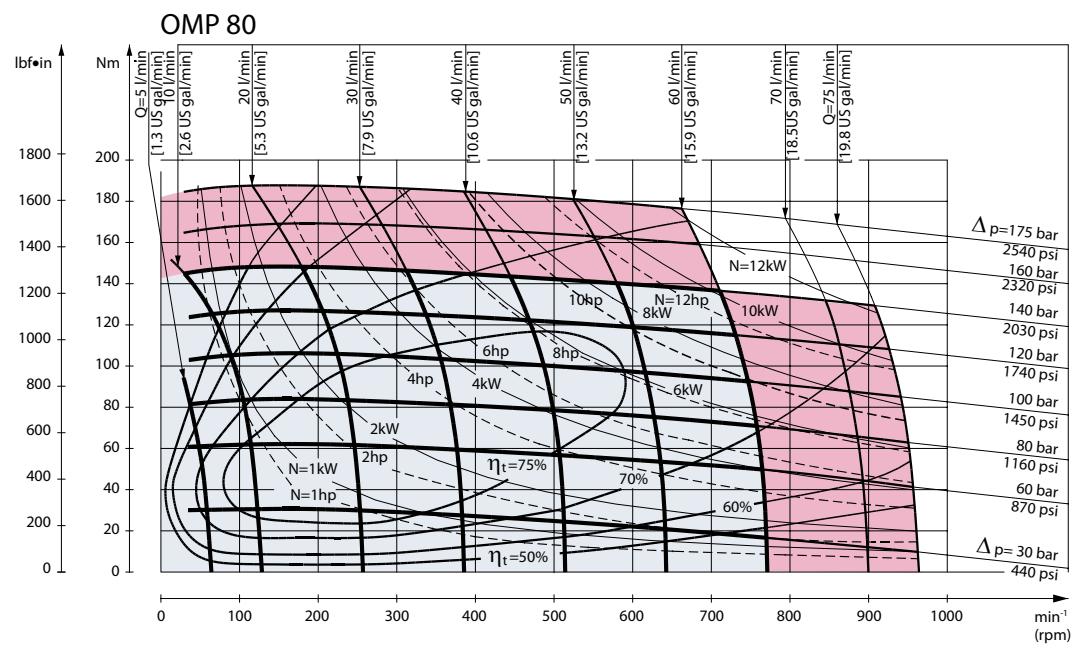

Explanation of function diagram use, basis and conditions can be found on page 7.


■ Continuous range

■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/interruption pressure drop for the actual shaft version can be found on page 10-13.

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

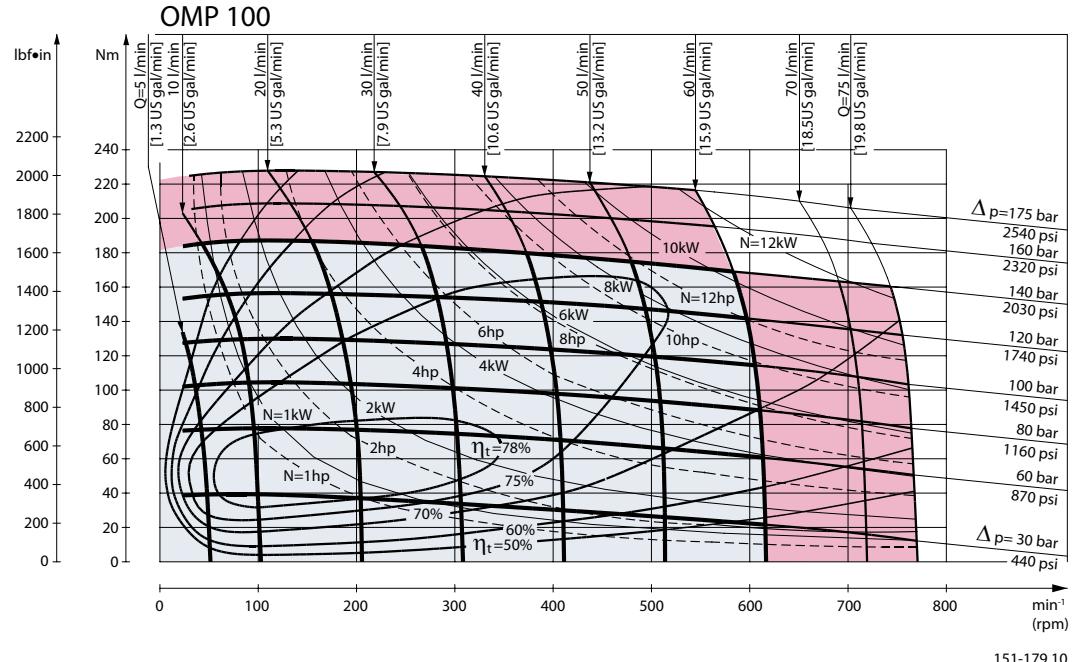

OMP 110
under preparation

Explanation of function diagram use, basis and conditions can be found on page 7.


■ Continuous range

■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/interruption pressure drop for the actual shaft version can be found on page 10-13

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

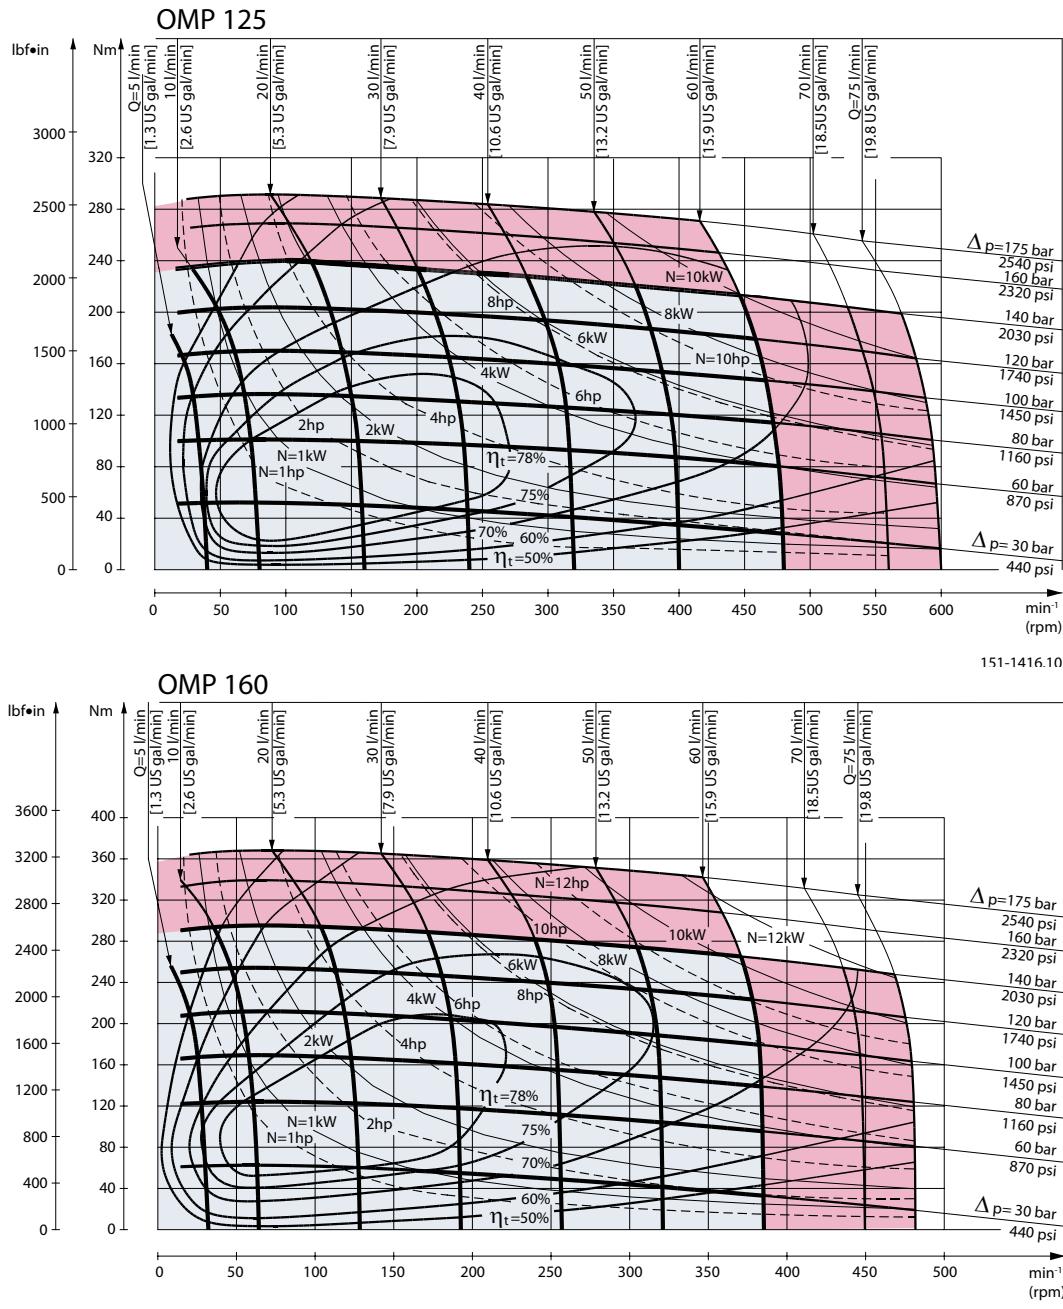

Explanation of function diagram use, basis and conditions can be found on page 7.


■ Continuous range

■ Intermittent range (max. 10% operation every minute)


Max. permissible continuous/interrittent pressure drop for the actual shaft version can be found on page 10-13.

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

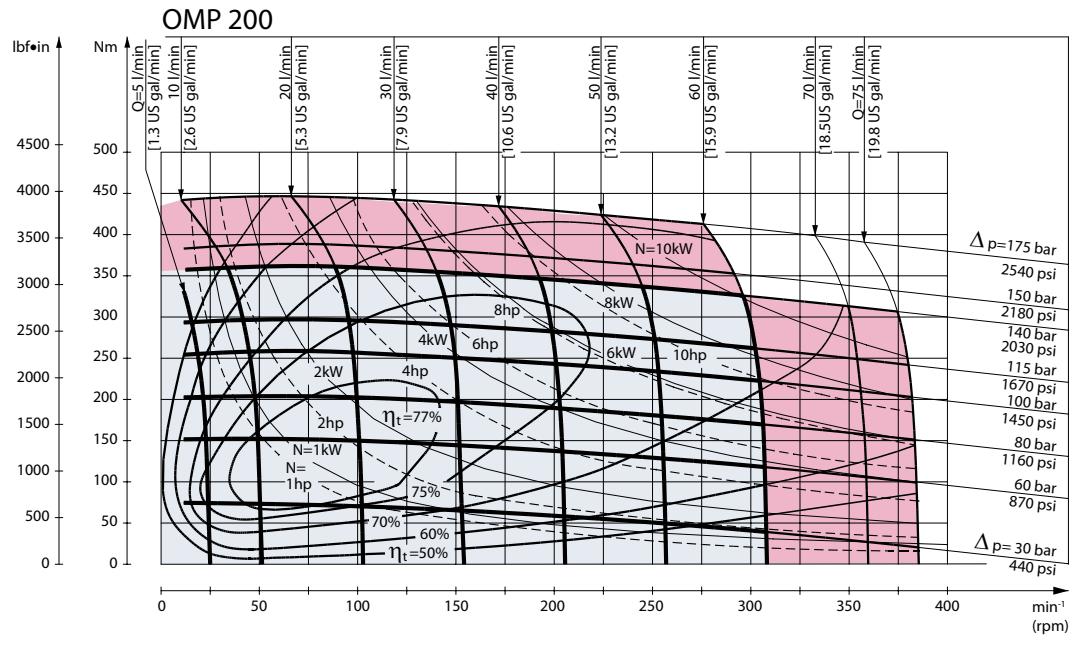

151-181.10

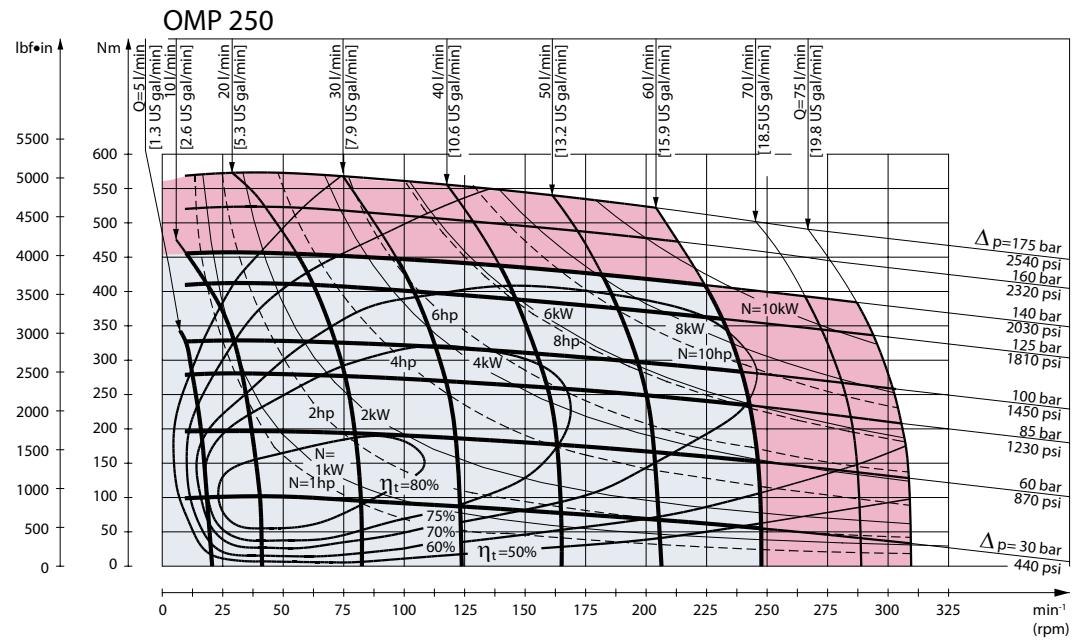

151-1244.10

Explanation of function diagram use, basis and conditions can be found on page 7.



■ Continuous range

■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/interruption pressure drop for the actual shaft version can be found on page 10-13.

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

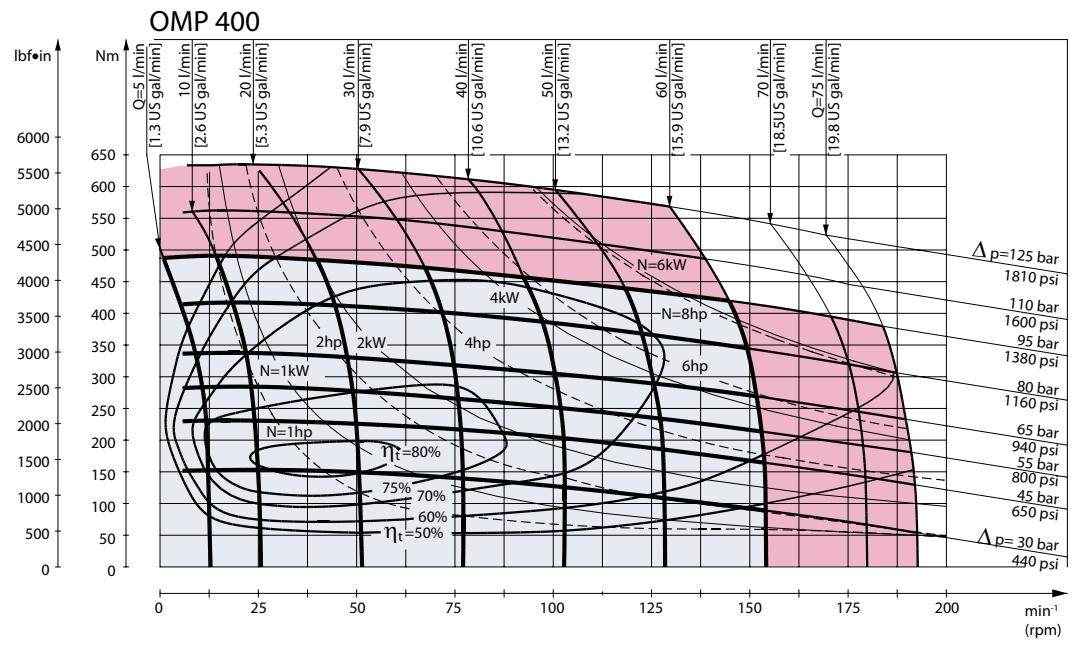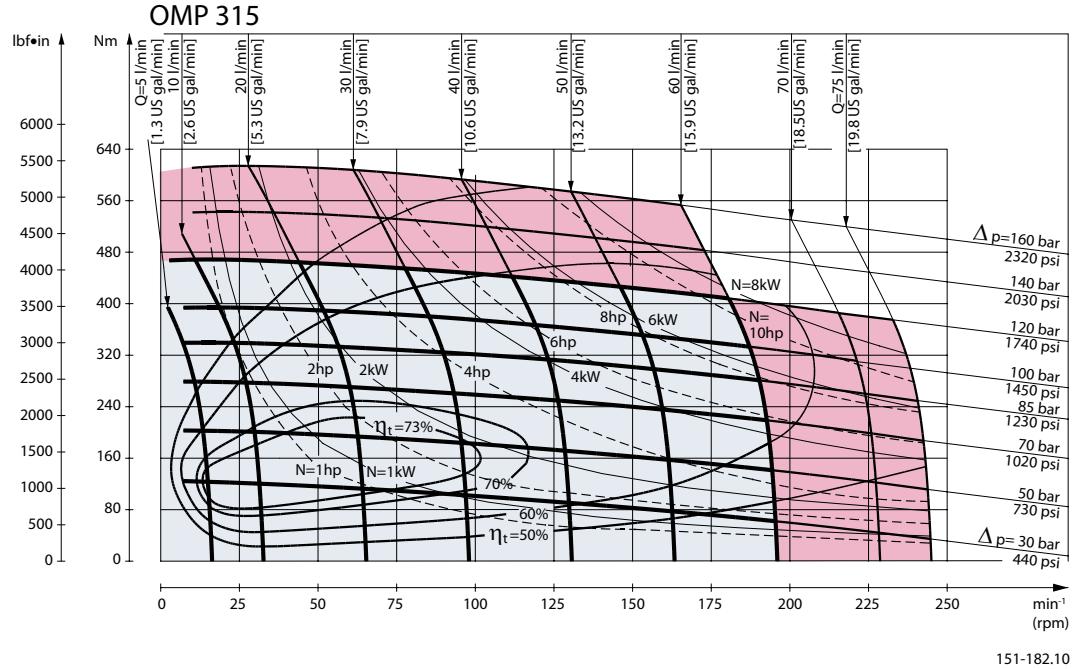

Explanation of function diagram use, basis and conditions can be found on page 7.

■ Continuous range


■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/intermittent pressure drop for the actual shaft version can be found on page 10-13.


Intermittent pressure drop and oil flow must not occur simultaneously.

Shaft Version


A: Cylindrical shaft
25 mm
D: Parallel key
 $A8 \cdot 7 \cdot 32$
DIN 6885

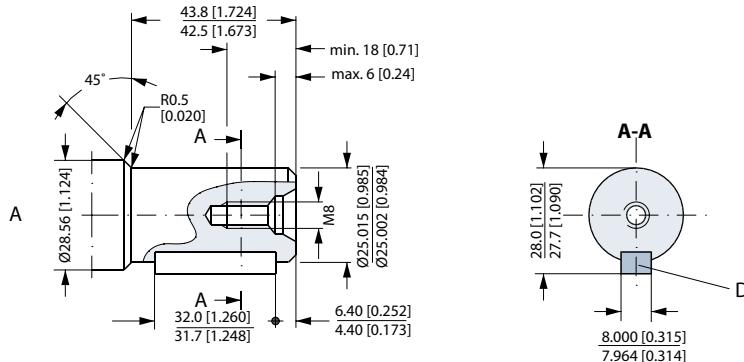

B: Cylindrical shaft
1 in
E: Parallel key
 $\frac{1}{4} \cdot \frac{1}{4} \cdot \frac{1}{4}$ in
B.S. 46

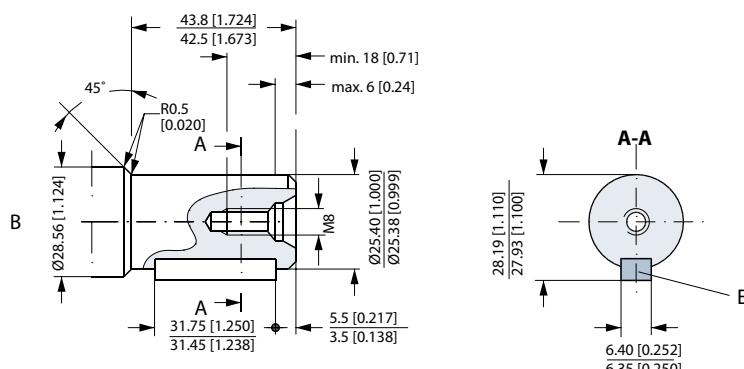

US version
C: Cylindrical shaft
1 in
F: Parallel key
 $\frac{1}{4} \cdot \frac{1}{4} \cdot \frac{1}{4}$ in
B.S. 46

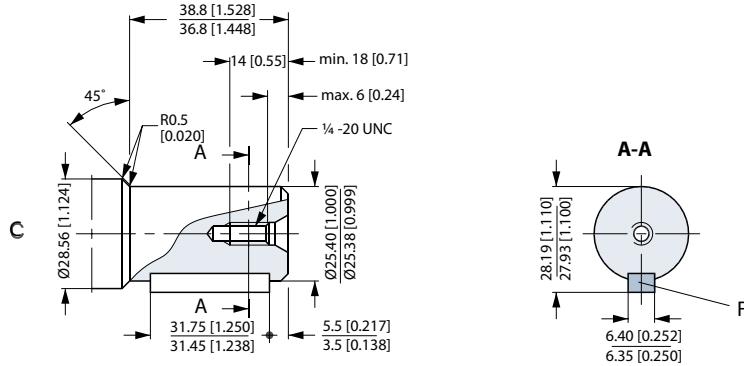

151-1842 12



Shaft Version

D: Cylindrical shaft 32 mm

I: Parallel key

A10 • 8 • 45

DIN 6885

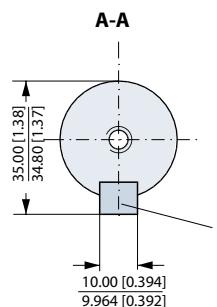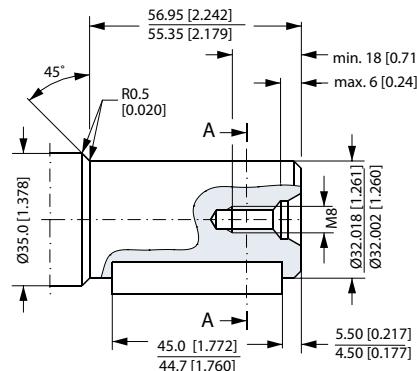

E: Splined shaft



B.S. 2059 (SAE 6 B)

Straight-sided,
bottom fitting, dep.

Fit 2

Nom. size 1 in

* Deviates from
BS 2059 (SAE 6B)

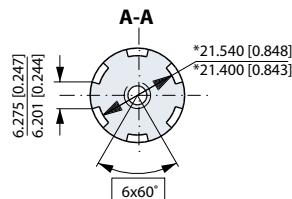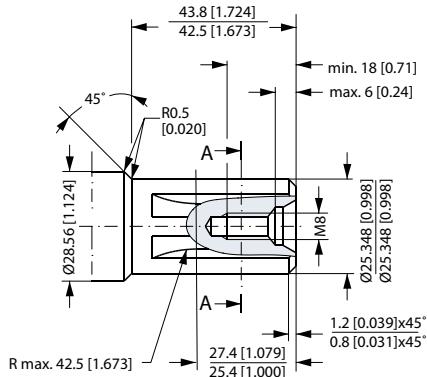

F: Tapered shaft

H: DIN 937

NV 30

Tightening torque:




$100 \pm 10 \text{ N}\cdot\text{m}$ [885 ± 88.50 lbf·in]

G: Taper 1:10


J: Parallel key

B5 • 5 • 14


DIN 6885

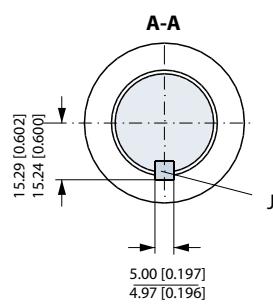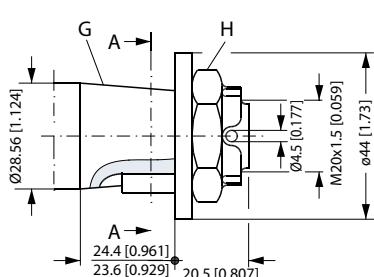

151-1843 11

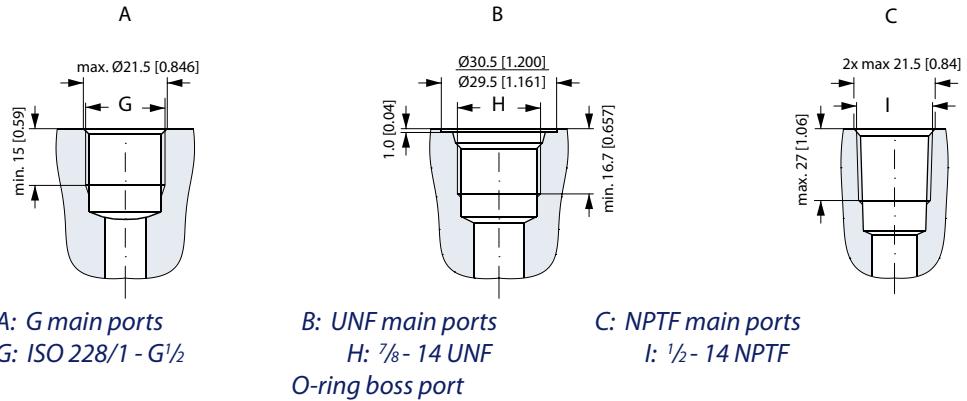Port Thread Versions


151-1844.11

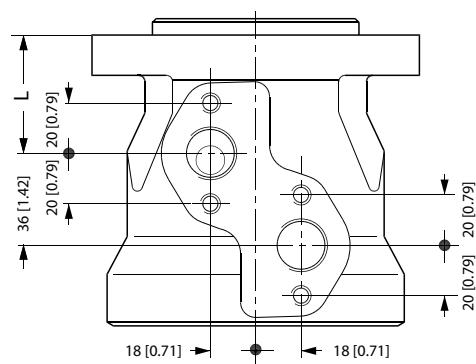European version
Manifold Mount


L: see dimensional drawing for
 given OMP motor on pages
 30 - 38

151-2135.10


Dimensions

Side port version with 2 hole oval mounting flange (A2-flange).

Type	Max. L mm [in]	L ₁ mm [in]
OMP 25	130.0 [5.12]	4.1 [0.16]
OMP 32	131.0 [5.16]	5.2 [0.20]
OMP 40	132.0 [5.20]	6.5 [0.26]
OMP 50	132.0 [5.20]	6.5 [0.26]
OMP 80	136.0 [5.35]	10.4 [0.41]
OMP 100	138.5 [5.45]	13.0 [0.51]
OMP 125	142.0 [5.59]	16.7 [0.66]
OMP 160	146.5 [5.77]	20.8 [0.82]
OMP 200	151.5 [5.96]	26.0 [1.02]
OMP 250	158.0 [6.22]	32.5 [1.28]
OMP 315	166.5 [6.56]	40.9 [1.61]
OMP 400	177.6 [6.99]	52.0 [2.05]

D: G 1/2; 15 mm [0.59 in] deep

E: M8; 13 mm [0.51 in] deep
(4 pcs.)

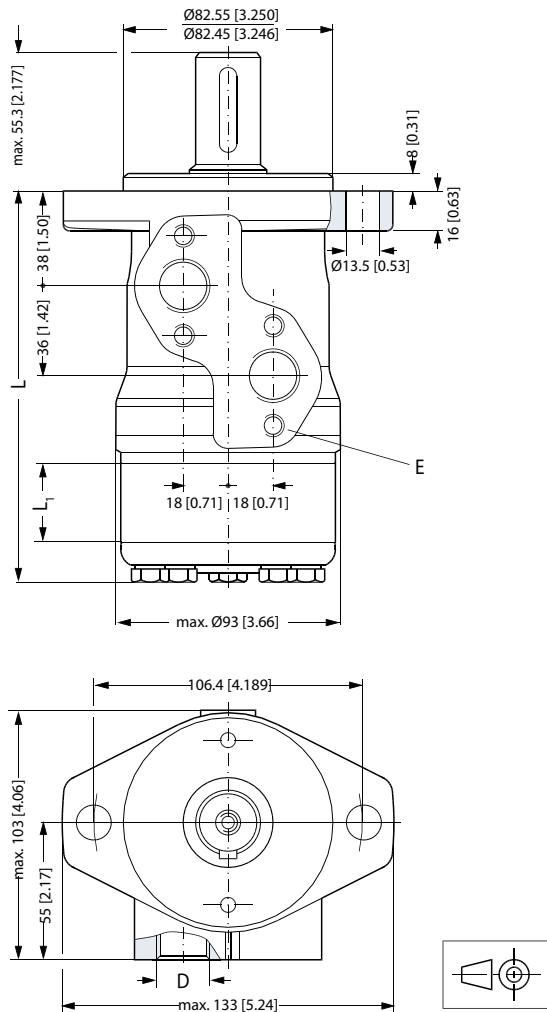

151-1840.11

Dimensions

*Side port version with 2 hole oval mounting flange (A2-flange).
With drain connection.*


Type	Max. L mm [in]	L ₁ mm [in]
OMP 25	130.0 [5.12]	4.1 [0.16]
OMP 32	131.0 [5.16]	5.2 [0.20]
OMP 40	132.0 [5.20]	6.5 [0.26]
OMP 50	132.0 [5.20]	6.5 [0.26]
OMP 80	136.0 [5.35]	10.4 [0.41]
OMP 100	138.5 [5.45]	13.0 [0.51]
OMP 125	142.0 [5.59]	16.7 [0.66]
OMP 160	146.5 [5.77]	20.8 [0.82]
OMP 200	151.5 [5.96]	26.0 [1.02]
OMP 250	158.0 [6.22]	32.5 [1.28]
OMP 315	166.5 [6.56]	40.9 [1.61]
OMP 400	177.6 [6.99]	52.0 [2.05]

C: Drain connection

G ¼; 12 mm [0.47 in] deep

D: G ½; 15 mm [0.59 in] deep

E: M8; 13 mm [0.51 in] deep
(4 pcs.)

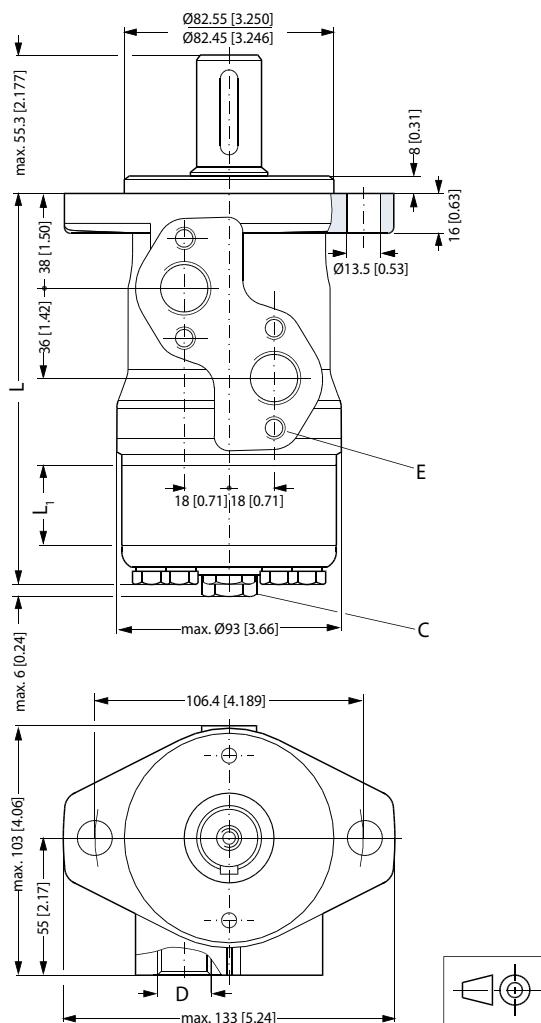


151-1850.11

Dimensions

OMP C and OMP N

Side port version with 2 hole oval mounting flange (A2-flange).

Type	Max. L mm [in]	L ₁ mm [in]
OMP 50	132.0 [5.20]	6.5 [0.26]
OMP 80	136.0 [5.35]	10.4 [0.41]
OMP 100	138.5 [5.45]	13.0 [0.51]
OMP 125	142.0 [5.59]	16.7 [0.66]
OMP 160	146.5 [5.77]	20.8 [0.82]
OMP 200	151.5 [5.97]	26.0 [1.02]
OMP 250	158.0 [6.22]	32.5 [1.28]
OMP 315	166.5 [6.56]	40.9 [1.61]
OMP 400	177.6 [6.99]	52.0 [2.05]

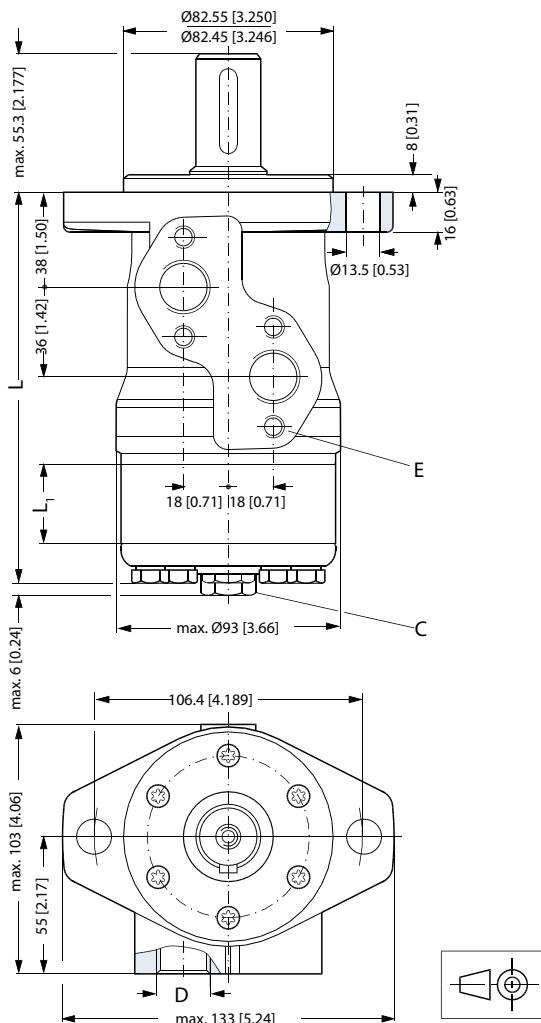

151-1841.12

Dimensions


End port version with 2 hole oval mounting flange (A2-flange).

Type	Max. L mm [in]	L ₁ mm [in]
OMP 50	146.1 [5.75]	6.5 [0.26]
OMP 80	150.0 [5.91]	10.4 [0.41]
OMP 100	152.7 [6.01]	13.0 [0.51]
OMP 125	156.2 [6.15]	16.7 [0.66]
OMP 160	160.4 [6.32]	20.8 [0.82]
OMP 200	165.6 [6.52]	26.0 [1.02]
OMP 250	172.1 [6.78]	32.5 [1.28]
OMP 315	180.5 [7.11]	40.9 [1.61]
OMP 400	191.6 [7.54]	52.0 [2.05]

C: Drain connection

G 1/4; 12 mm [0.47 in] deep

D: G 1/2; 15 mm [0.59 in] deep

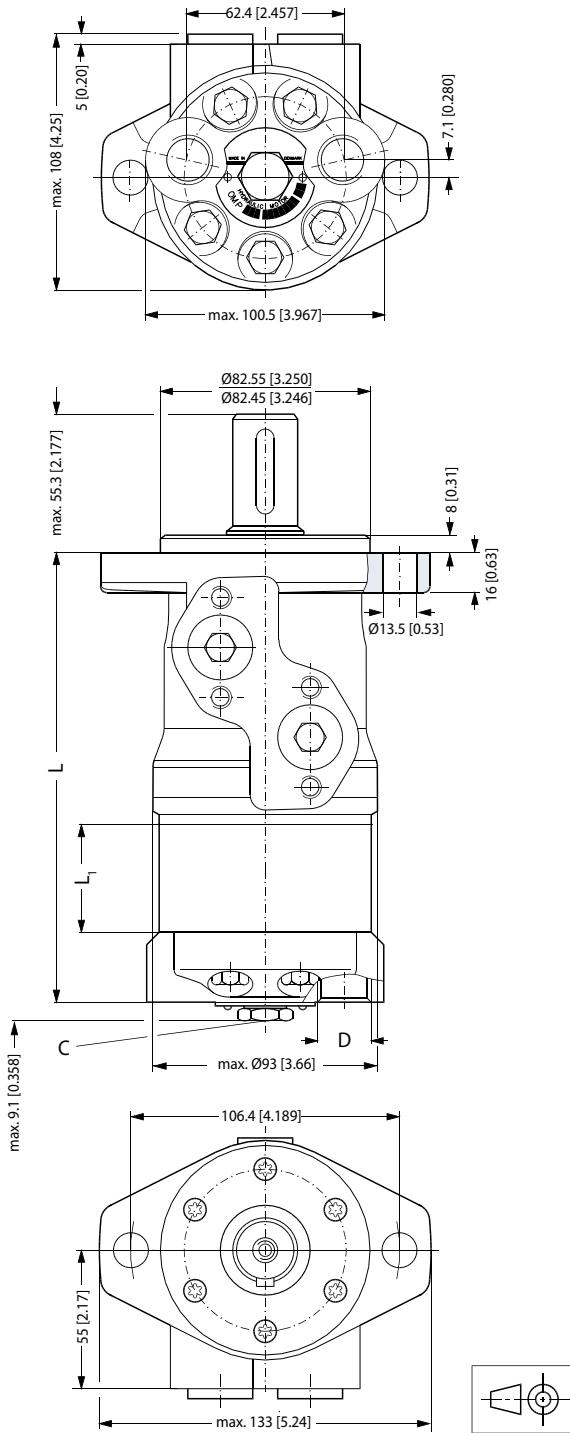

151-1748.11

Dimensions

Side port version with 2 hole oval mounting flange (A2-flange).

Type	Max. L mm [in]	L ₁ mm [in]
OMP 25	136.0 [5.35]	4.1 [0.16]
OMP 32	137.0 [5.39]	5.2 [0.20]
OMP 40	138.0 [5.43]	6.5 [0.26]
OMP 50	138.0 [5.43]	6.5 [0.26]
OMP 80	142.0 [5.59]	10.4 [0.41]
OMP 100	144.5 [5.69]	13.0 [0.51]
OMP 125	148.0 [5.83]	16.7 [0.66]
OMP 160	152.5 [6.00]	20.8 [0.82]
OMP 200	157.5 [6.20]	26.0 [1.02]
OMP 250	164.0 [6.46]	32.5 [1.28]
OMP 315	172.5 [6.79]	40.9 [1.61]
OMP 400	183.6 [7.23]	52.0 [2.05]

C: Drain connection


G 7/16 UNF;

12 mm [0.47 in] deep

D: G 7/8 - 14 UNF;

16.7 mm [0.66 in] deep

E: M8; 13 mm [0.51 in] deep
(4 pcs.)

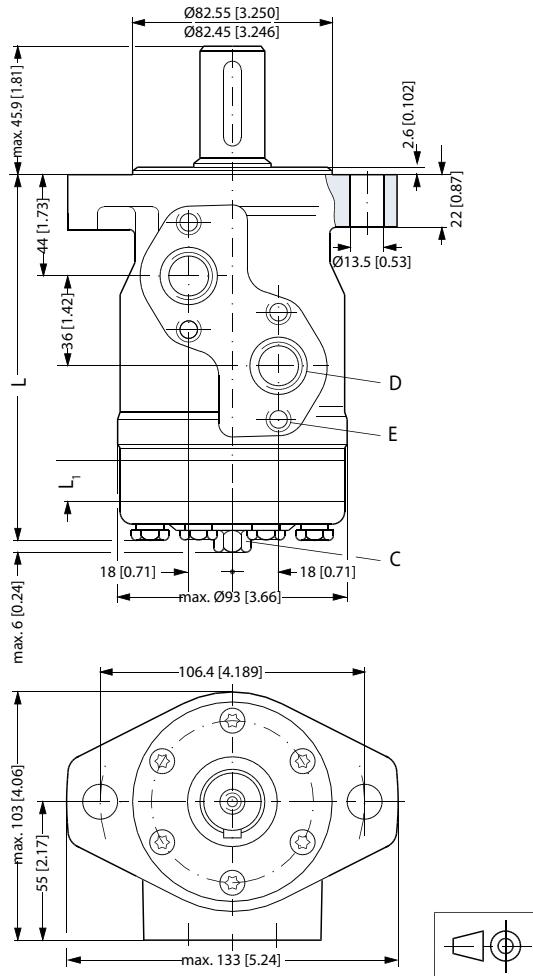

151-1217.11

Dimensions

Side port version with 4 hole oval mounting flange (A4-flange).



Type	Max. L mm [in]	L ₁ mm [in]
OMP 50	132.0 [5.20]	6.5 [0.26]
OMP 80	136.0 [5.35]	10.4 [0.41]
OMP 100	138.5 [5.45]	13.0 [0.51]
OMP 125	142.0 [5.59]	16.7 [0.66]
OMP 160	146.5 [5.77]	20.8 [0.82]
OMP 200	151.5 [5.97]	26.0 [1.02]
OMP 250	158.0 [6.22]	32.5 [1.28]
OMP 315	166.5 [6.56]	40.9 [1.61]
OMP 400	177.6 [6.99]	52.0 [2.05]

C: Drain connection

G 1/4; 12 mm [0.47 in] deep

D: G 1/2; 15 mm [0.59 in] deep

E: M8; 13 mm [0.51 in] deep
(4 pcs.)

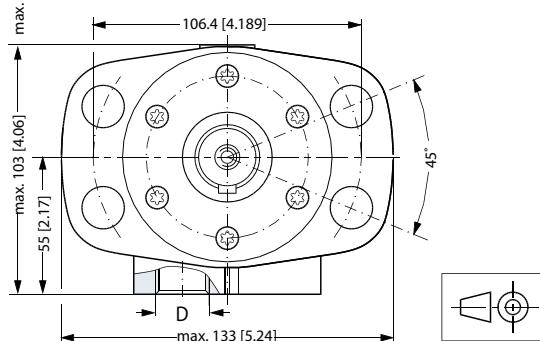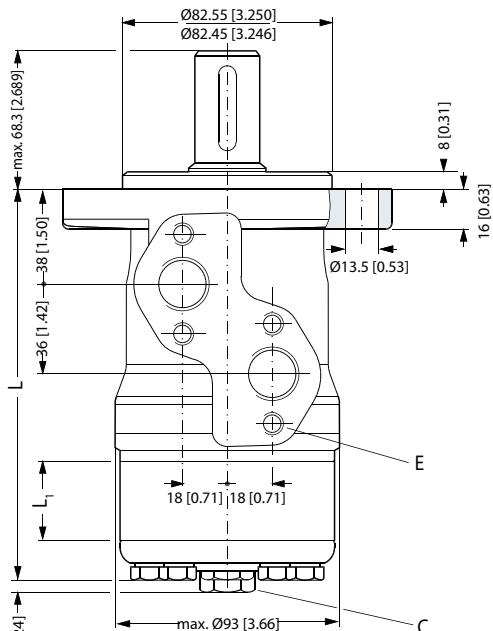

151-1747.12

Dimensions

End port version with square mounting flange (C-flange).


Type	Max. L mm [in]	L ₁ mm [in]
OMP 50	152.0 [5.98]	6.5 [0.26]
OMP 80	156.0 [6.14]	10.4 [0.41]
OMP 100	158.6 [6.24]	13.0 [0.51]
OMP 125	162.1 [6.38]	16.7 [0.66]
OMP 160	166.4 [6.55]	20.8 [0.82]
OMP 200	171.6 [6.76]	26.0 [1.02]
OMP 250	178.1 [7.01]	32.5 [1.28]
OMP 315	186.5 [7.34]	40.9 [1.61]
OMP 400	197.6 [7.78]	52.0 [2.05]

C: Drain connection

G 1/4; 12 mm [0.47 in] deep

D: G 1/2; 15 mm [0.59 in] deep

E: M10; 15 mm [0.59 in] deep
(4 pcs.)

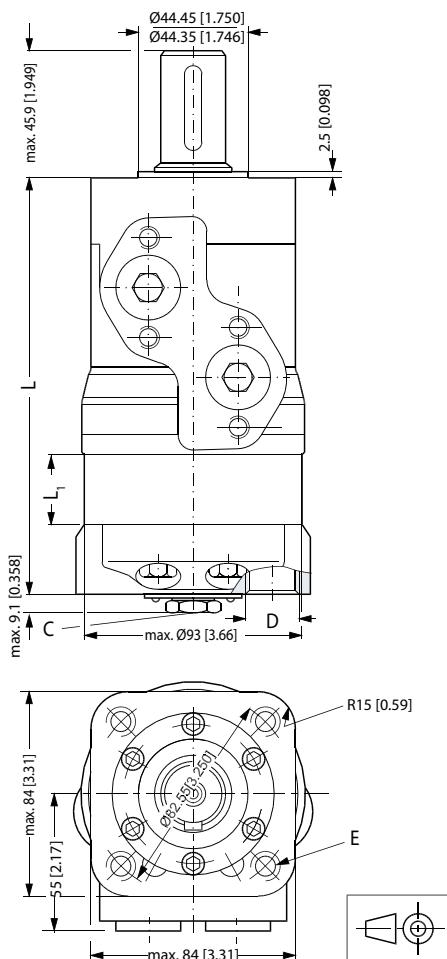

151-1749.11

Dimensions

Side port version with square mounting flange (C-flange).

Type	Max. L mm [in]	L ₁ mm [in]
OMP 50	132.0 [5.20]	6.5 [0.26]
OMP 80	136.0 [5.35]	10.4 [0.41]
OMP 100	138.5 [5.45]	13.0 [0.51]
OMP 125	142.0 [5.59]	16.7 [0.66]
OMP 160	146.5 [5.77]	20.8 [0.82]
OMP 200	151.5 [5.97]	26.0 [1.02]
OMP 250	158.0 [6.22]	32.5 [1.28]
OMP 315	166.5 [6.56]	40.9 [1.61]
OMP 400	177.6 [6.99]	52.0 [2.05]



C: Drain connection

7/16 - 20 UNF;
12 mm [0.47 in] deep

D: 7/8 - 14 UNF;
16.76 mm [0.66 in] deep
or 1/2 - 14 NPTF

E: 3/8 - 16 UNC;
15 mm [0.59 in] deep
(4 off)

F: M8; 13 mm [0.51 in] deep
(4 pcs.)

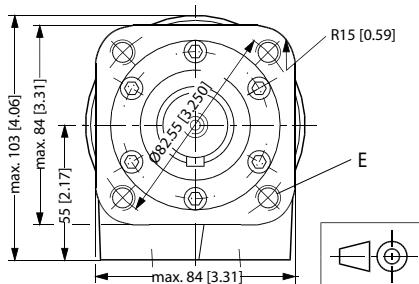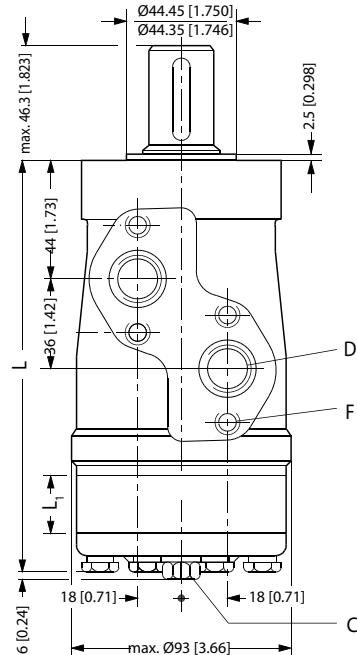

151-1214.11



Dimensions

Output shaft.max.	mm L ₂ [in]
Cylindrical shaft 25 mm [0.98 in]	max. 115 [4.53]
Tapered shaft 28.56 mm [1.12 in]	max. 117.8 [4.64]

Type	Max. L mm [in]	L ₁ mm [in]
OMP 50	71.8 [2.83]	6.5 [0.26]
OMP 80.	75.7 [2.98]	10.4 [0.41]
OMP 100	78.3 [3.08]	13.0 [0.51]
OMP 125	81.6 [3.21]	16.7 [0.66]
OMP 160	86.1 [3.39]	20.8 [0.82]
OMP 200	91.3 [3.60]	26.0 [1.02]
OMP 250	97.8 [3.85]	32.5 [1.28]
OMP 315	106.2 [4.18]	40.9 [1.61]
OMP 400	117.3 [4.62]	52.0 [2.05]

- C: Drain connection
G ¼; 12 mm [0.47 in] deep
D: G ½; 15 mm [0.59 in] deep
E: M10; 20 mm [0.79 in] deep
(4 pcs.)

OMPW and OMPWN wheel motor

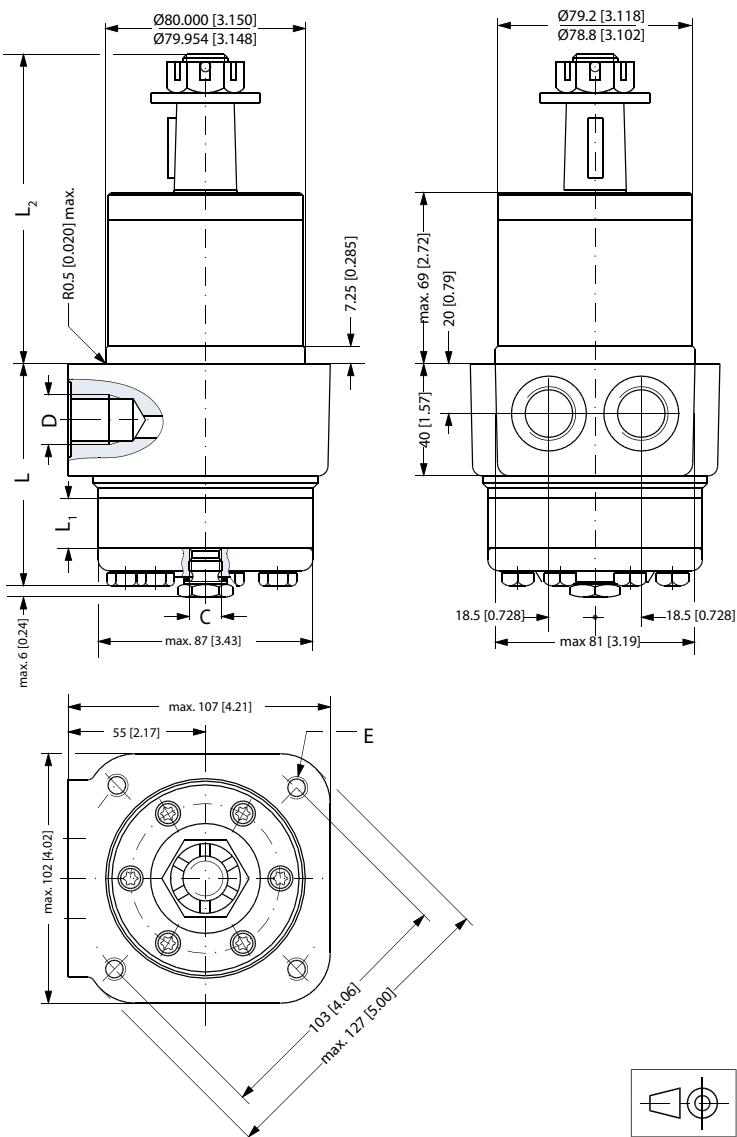

151-1360.11



OMP
Technical Information
Notes

Notes

Versions

Mounting flange	Spigot diameter (front/rear end)	Bolt circle diameter (BC)	Shaft	Port size	European version	US version	Side port version	End port version	Flange port version	Standard shaft seal	High pressure shaft seal	Drain connection	Check valve	Main type designation
2 hole oval flange (A2-flange)	$\emptyset 82.5 \text{ mm}$ [3.25 in]	$\emptyset 106.4 \text{ mm}$ [4.20 in]	Cyl. 25 mm	G $\frac{1}{2}$	●		●			●	No	No	OMR	
				G $\frac{1}{2}$	●		●			●	Yes	Yes	OMR	
				G $\frac{1}{2}$	●			●		●	Yes	Yes	OMR	
			Cyl. 1 inch	G $\frac{1}{2}$	●		●			●	No	No	OMR	
				G $\frac{1}{2}$	●		●			●	Yes	Yes	OMR	
			Splined 1 inch	$\frac{7}{8}-14 \text{ UNF}$		●	●			●	Yes	Yes	OMR	
				G $\frac{1}{2}$	●		●			●	No	No	OMR	
				G $\frac{1}{2}$	●		●			●	Yes	Yes	OMR	
			Cyl. 32 mm	$\frac{7}{8}-14 \text{ UNF}$		●	●			●	Yes	Yes	OMR	
				G $\frac{1}{2}$	●		●			●	Yes	Yes	OMR	
4 hole oval flange (A4-flange)	$\emptyset 82.5 \text{ mm}$ [3.25 in]	$\emptyset 106.4 \text{ mm}$ [4.20 in]	Cyl. 25 mm	G $\frac{1}{2}$	●		●			●	Yes	Yes	OMR	
			Cyl. 32 mm	G $\frac{1}{2}$	●		●			●	Yes	Yes	OMR	
			Cyl. 1 $\frac{1}{4}$ in	$\frac{7}{8}-14 \text{ UNF}$		●	●			●	Yes	Yes	OMR	
Square flange (C-flange)	$\emptyset 44.4 \text{ mm}$ [1.75 in]	$\emptyset 82.5 \text{ mm}$ [3.25 in]	Cyl. 25 mm	G $\frac{1}{2}$	●			●		●	Yes	Yes	OMR	
			Cyl. 1 in	$\frac{7}{8}-14 \text{ UNF}$		●	●			●	Yes	Yes	OMR	

OMR motors with corrosion resistant parts

2 hole oval flange (A2-flange)	$\emptyset 82.5 \text{ mm}$ [3.25 in]	$\emptyset 106.4 \text{ mm}$ [4.20 in]	Cyl. 25 mm	G $\frac{1}{2}$	●		●			●	Yes	Yes	OMR C
--------------------------------	--	---	------------	-----------------	---	--	---	--	--	---	-----	-----	-------

OMR motors with needle bearings

2 hole oval flange (A2-flange)	$\emptyset 82.5 \text{ mm}$ [3.25 in]	$\emptyset 106.4 \text{ mm}$ [4.20 in]	Cyl. 25 mm	G $\frac{1}{2}$	●		●			●	Yes	Yes	OMR N
Wheel	$\emptyset 82.5 \text{ mm}$ [3.25 in]	$\emptyset 147.6 \text{ mm}$ [5.81 in]	Tap. 35 mm	G $\frac{1}{2}$	●				●	●	Yes	Yes	OMRW N
			Tap. 1 $\frac{1}{4}$ in	$\frac{7}{8}-14 \text{ UNF}$		●			●	●	Yes	Yes	OMRW N

OMR motors with integrated brake

2 hole oval flange (A2-flange)	$\emptyset 82.5 \text{ mm}$ [3.25 in]	$\emptyset 106.4 \text{ mm}$ [4.20 in]	Cyl. 25 mm	G $\frac{1}{2}$	●		●			●	Yes	Yes	OMR F
--------------------------------	--	---	------------	-----------------	---	--	---	--	--	---	-----	-----	-------

OMR motors with integrated brake and needle bearings

2 hole oval flange (A2-flange)	$\emptyset 82.5 \text{ mm}$ [3.25 in]	$\emptyset 106.4 \text{ mm}$ [4.20 in]	Cyl. 1 in	$\frac{7}{8}-14 \text{ UNF}$		●	●			●	Yes	Yes	OMR NF
Wheel	$\emptyset 82.5 \text{ mm}$ [3.25 in]	$\emptyset 147.6 \text{ mm}$ [5.81 in]	Tap. 35 mm	G $\frac{1}{2}$	●				●	●	Yes	Yes	OMRW NF

Functions diagram - see page: →

Features available (options):

Low leakage (low speed valve)

Reverse rotation

Speed sensor

Painted

Viton shaft seal



OMR
Technical Information
Code Numbers

Code Numbers

→

Code numbers	Displacement [cm³]									Technical data - Page	Dimensions - Page	
	50	80	100	125	160	200	250	315	375			
151-	0410	0411	0412	0413	0414	0415	0416	0417	0418	42	61	
151-	0710	0711	0712	0713	0714	0715	0716	0717	0718	42	62	
151-	6190	6191	6192	6193	6194	6195	6196	6197	6198	42	64	
151-	0400	0401	0402	0403	0404	0405	0406	0407	0408	42	61	
151-	0700	0701	0702	0703	0704	0705	0706	0707	0708	42	62	
151-	7240	7241	7242	7243	7244	7245	7246	7247	7248	42	65	
151-	0420	0421	0422	0423	0424	0425	0426	0427	0428	43	61	
151-	0720	0721	0722	0723	0724	0725	0726	0727	0728	43	62	
151-	7250	7251	7252	7253	7254	7255	7256	7257	7258	43	65	
151-	0248	0242	0243	0208	0244	0245	0247	0246	6294	44	63	
151-	0265	0266	0267	6295	0268	0269	0271	0270	6296	43	63	
151-	6010	6011	6012	6013	6014	6015	6016	6017	6018	42	66	
151-	6000	6001	6002	6003	6004	6005	6006	6007	6008	44	66	
151-	6110	6111	6112	6113	6114	6115	6116	6117	6118	44	67	
151-	6210	6211	6212	6213	6214	6215	6216	6217	6218	42	68	
151-	7260	7261	7262	7263	7264	7265	7266	7267	7269	42	69	
OMR motors with corrosion resistant parts												
151-	1231	1232	1233	1238	1234	1235	1236	1237	1243	42	63	
OMR motors with needle bearings												
151-	6380	6381	-	6383	6384	6385	6386	6387	6388	42	63	
151-	6300	6301	6302	6303	6304	6305	6306	6307	6308	44	70	
151-	6430	6431	6432	6433	6434	6435	6436	6437	6438	44	71	
OMR motors with integrated brake												
151-	-	6461	6462	6463	6464	6465	6466	6467	6468	42	72	
OMR motors with integrated brake and needle bearings												
151-	-	6471	6472	6473	6474	6475	6476	6477	6478	42	73	
151-	-	-	6442	6443	6444	6445	-	-	-	44	74	
→	51	51	52	52	53	53	54	54	55			

Ordering

Add the four digit prefix "151-" to the four digit numbers from the chart for complete code number.

Example:

151-6004 for an OMR 160 with A4 flange, cyl. 32 mm shaft, port size G 1/2 and side port version.

Orders will not be accepted without the four digit prefix.

Technical data for OMR with 25 mm and 1 in cylindrical shaft

Type		OMR	OMR	OMR	OMR	OMR	OMR	OMR	OMR
Motor size		50	80	100	125	160	200	250	315
Geometric displacement	cm ³ [inch]	51.6 [3.16]	80.3 [4.91]	99.8 [6.11]	125.7 [7.69]	159.6 [9.77]	199.8 [12.23]	249.3 [15.26]	315.7 [19.32]
Max. speed	min ⁻¹ [rpm]	cont. int ¹⁾	775 970	750 940	600 750	475 600	375 470	300 375	240 300
Max. torque	N·m [lbf·in]	cont.	100 [890]	195 [1730]	240 [2120]	300 [2660]	300 [2660]	300 [2660]	300 [2660]
		int. ¹⁾	130 [1150]	220 [1960]	280 [2480]	340 [3010]	390 [3450]	390 [3450]	380 [3360]
		peak ²⁾	170 [1510]	270 [2390]	320 [2830]	370 [3280]	460 [4070]	560 [4960]	600 [5310]
Max. output	kW [hp]	cont.	7.0 [9.4]	12.5 [16.8]	13.0 [17.4]	12.5 [16.8]	10.0 [13.4]	8.0 [10.7]	6.0 [8.1]
		int. ¹⁾	8.5 [11.4]	15.0 [20.1]	15.0 [20.1]	14.5 [19.4]	12.5 [16.8]	10.0 [13.4]	8.0 [10.7]
Max. pressure drop	bar [psi]	cont.	140 [2030]	175 [2540]	175 [2540]	175 [2540]	130 [1890]	110 [1600]	80 [1160]
		int. ¹⁾	175 [2540]	200 [2900]	200 [2900]	200 [2900]	175 [2540]	140 [2030]	110 [1600]
		peak ²⁾	225 [3260]	225 [3260]	225 [3260]	225 [3260]	225 [3260]	200 [2900]	150 [2180]
Max. oil flow	l/min [US gal/min]	cont.	40 [10.6]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]
		int. ¹⁾	50 [13.2]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]
Max. starting pressure with unloaded shaft	bar [psi]		10 [145]	10 [145]	10 [145]	9 [130]	7 [100]	5 [75]	5 [75]
Min starting torque	at max. press drop cont. N·m [lbf·in]		80 [710]	150 [1330]	200 [1770]	250 [2210]	240 [2120]	260 [2300]	240 [2120]
	at max. press.drop int. ¹⁾ N·m [lbf·in]		100 [890]	170 [1510]	230 [2040]	280 [2480]	320 [2830]	330 [2920]	310 [2740]
								350 [3100]	380 [3360]

¹⁾ Intermittent operation: the permissible values may occur for max. 10% of every minute.

²⁾ Peak load: the permissible values may occur for max. 1% of every minute.

Technical data for OMR with 1 in splined and 28.5 mm tapered shaft

Type		OMR	OMR	OMR	OMR	OMR	OMR	OMR	OMR	OMR
Motor size		50	80	100	125	160	200	250	315	375
Geometric displacement	cm ³ [inch]	51.6 [3.16]	80.3 [4.91]	99.8 [6.11]	125.7 [7.69]	159.6 [9.77]	199.8 [12.23]	249.3 [15.26]	315.7 [19.32]	372.6 [22.80]
Max. speed	min ⁻¹ [rpm]	cont. int ¹⁾	775 970	750 940	600 750	475 600	375 470	300 375	240 300	190 240
Max. torque	N·m [lbf·in]	cont. int. ¹⁾ peak ²⁾	100 [890] 130 [1150] 170 [1510]	195 [1730] 220 [1950] 270 [2390]	240 [2120] 280 [2480] 320 [2830]	300 [2660] 340 [3010] 370 [3280]	360 [3190] 430 [3810] 460 [4070]	360 [3190] 440 [3890] 560 [4960]	360 [3190] 470 [4160] 600 [5310]	360 [3190] 460 [4160] 610 [5400]
Max. output	kW [hp]	cont. int. ¹⁾	7.0 [9.4]	12.5 [16.8]	13.0 [17.4]	12.5 [16.8]	12.5 [16.8]	10.0 [13.4]	7.0 [9.4]	5.0 [6.7]
Max. pressure drop	bar [psi]	cont. int ¹⁾ peak ²⁾	140 [2030]	175 [2540]	175 [2540]	175 [2540]	165 [2390]	130 [1890]	100 [1450]	85 [1230]
Max. oil flow	l/min [US gal/min]	cont. int. ¹⁾	175 [2540]	200 [2900]	200 [2900]	200 [2900]	200 [2900]	175 [2540]	140 [2030]	115 [1670]
Max. starting pressure with unloaded shaft	bar [psi]	cont. int. ¹⁾	225 [3260]	225 [3260]	225 [3260]	225 [3260]	225 [3260]	225 [3260]	200 [2900]	150 [2180]
Min starting torque	at max. press drop cont. N·m [lbf·in]	40 [10.6]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]	60 [15.9]
	at max. press.drop int. ¹⁾ N·m [lbf·in]	50 [13.2]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]	75 [19.8]

¹⁾ Intermittent operation: the permissible values may occur for max. 10% of every minute.

²⁾ Peak load: the permissible values may occur for max. 1% of every minute.

Technical data for OMR with 32 mm , 1 ¼ in cylindrical shaft and 35 mm, 1 ¼ in tapered shaft

Type	OMR	OMR	OMR	OMR	OMR	OMR	OMR	OMR	OMR
Motor size	50	80	100	125	160	200	250	315	375
Geometric displacement cm³ [inch]	51.6 [3.16]	80.3 [4.91]	99.8 [6.11]	125.7 [7.69]	159.6 [9.77]	199.8 [12.23]	249.3 [15.26]	315.7 [19.32]	372.6 [22.80]
Max. speed min⁻¹ [rpm]	cont. int. ¹⁾	775 970	750 940	600 750	475 600	375 470	300 375	240 300	190 240
Max. torque N·m [lbf·in]	cont. int. ¹⁾ peak ²⁾	100 [890] 130 [1150] 170 [1510]	195 [1730] 220 [1957] 270 [2390]	240 [2120] 280 [2480] 320 [2830]	300 [2660] 340 [3010] 370 [3280]	380 [3360] 430 [3810] 460 [4070]	450 [3980] 500 [4430] 560 [4960]	540 [4780] 610 [5400] 710 [6280]	550 [4870] 690 [6110] 840 [7440]
Max. output kW [hp]	cont. int. ¹⁾	7.0 [9.4] 8.5 [11.4]	12.5 [16.8] 15.0 [20.1]	13.0 [17.4] 15.0 [20.1]	12.5 [16.8] 14.5 [19.4]	12.5 [16.8] 14.0 [18.8]	11.0 [14.8] 13.0 [17.4]	10.0 [13.4] 12.0 [16.1]	9.0 [12.1] 10.0 [13.4]
Max. pressure drop bar [psi]	cont. int. ¹⁾ peak ²⁾	140 [2030] 175 [2540] 225 [3260]	175 [2540] 200 [2900] 225 [3260]	135 [1960] 175 [2540] 210 [3050]	115 [1670] 150 [2180] 175 [2540]				
Max. oil flow l/min [US gal/min]	cont. int. ¹⁾	40 [10.6] 50 [13.2]	60 [15.9] 75 [19.8]						
Max. starting pressure with unloaded shaft bar [psi]		10 [145]	10 [145]	10 [145]	9 [130]	7 [100]	5 [75]	5 [75]	5 [75]
Min starting torque at max. press.drop cont. N·m [lbf·in]		80 [710]	150 [1330]	200 [1770]	250 [2210]	320 [2830]	410 [3630]	500 [4430]	500 [4430]
Min starting torque at max. press.drop int. ¹⁾ N·m [lbf·in]		100 [890]	170 [1510]	230 [2040]	280 [2480]	370 [3280]	460 [4070]	550 [4870]	660 [5840]
Min starting torque at max. press.drop peak ²⁾ N·m [lbf·in]									570 [5050]

Type	Max. inlet pressure		Max.return pressure with drain line
OMR 50 - 375	bar [psi]	cont	175 [2540]
	bar [psi]	int. ¹⁾	200 [2900]
	bar [psi]	peak ²⁾	225 [3260]

¹⁾ Intermittent operation: the permissible values may occur for max. 10% of every minute.

²⁾ Peak load: the permissible values may occur for max. 1% of every minute.

**Technical Data for
Parking Brake Motor
OMR F, OMR NF and
OMRW NF**

Technical data for brake motor		
Holding torque 1)	N·m [lbf·in]	400 [3540]
Min. release pressure 2)	bar [psi]	21 [305]
Max. pressure in brake line	bar [psi]	200 [2900]


- 1) This brake is to be used only as a passive parking brake. It may not be used for dynamic braking.
- 2) Brake motors must always have a drain line. The brake release pressure is the difference between the pressure in the brake release line and the pressure in the drain line.

Function


In normal condition where there is no pressure on the integrated brake in OMR, i.e. the brake is applied. The brake is released when hydraulic pressure of 21 bar [300psi] min. is applied to the brake release port (1).

The pressure forces the piston (2) against the springs (3 and 4) disengaging the outer and inner discs (5 and 6) from each other so that the cardan shaft (7) and consequently output shaft (8) become free to rotate.

If the pressure on the brake release port is reduced to less than 21 bar [300psi], the springs force the piston and pressure pad (9) against the brake discs and the cardan shaft/output shaft begin to lock up.

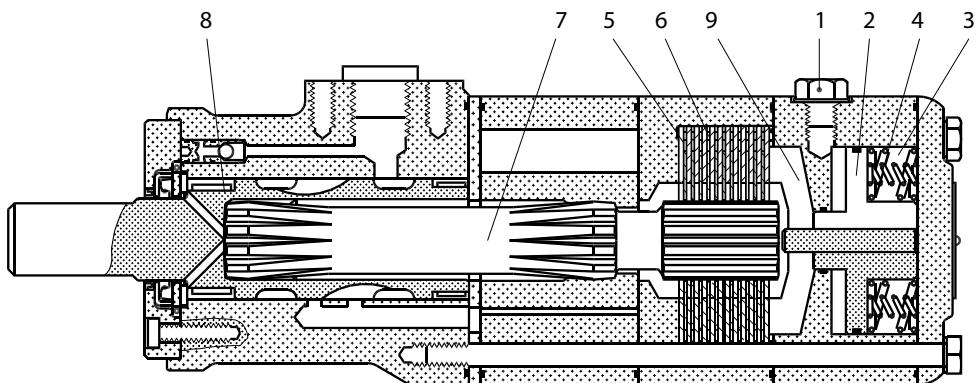

151-1739.10.10

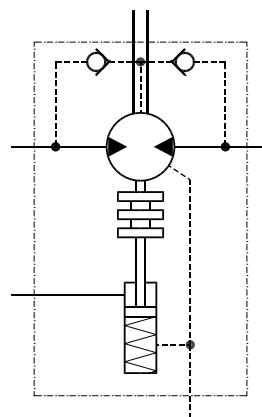

151-1726.10

OMR

Technical Information


Technical Data - Max. Permissible Shaft Seal Pressure

OMR with High Pressure Shaft Seal (HPS)

OMR with HPS,
without check valves and
without drain connection:
The shaft seal pressure
equals the average of
input pressure and
return pressure

$$P_{\text{seal}} = \frac{P_{\text{in}} + P_{\text{return}}}{2}$$


Max. permissible shaft seal pressure



151-1743.10

OMR with HPS, check valves and
with drain connection:


The shaft seal pressure
equals the pressure in
the drain line.



151-320.10

OMR with HPS, check valves and
without drain connection:


The pressure on the
shaft seal never exceeds
the pressure in the return line.

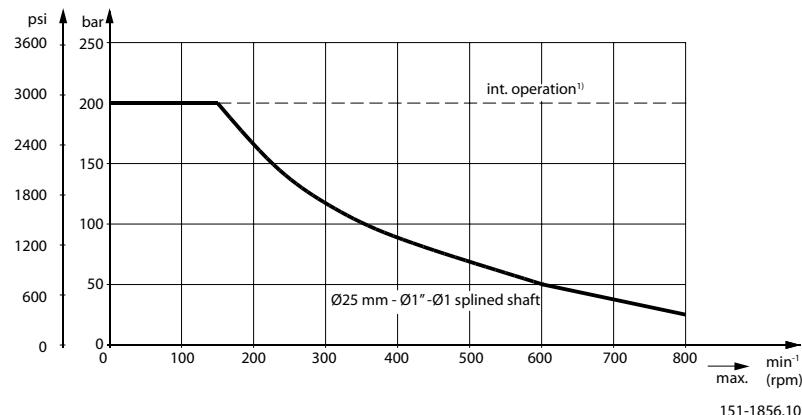

151-1856.10

OMR with Standard Shaft Seal

OMR with standard shaft seal,
check valves and without
use of drain connection:
The pressure on the shaft seal
never exceeds the pressure in
the return line




151-320.10

OMR with standard shaft seal,
check valves and with
drain connection:

The shaft seal pressure equals
the pressure on the drain line.


Max. return pressure without drain line or max. pressure in the drain line

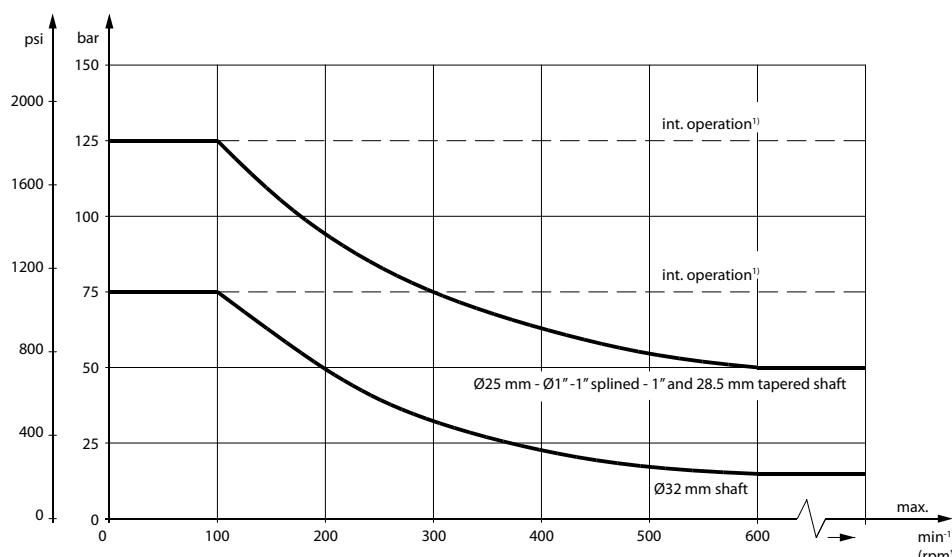

151-1563.10

^{¹⁾} Intermittent operation: the permissible values may occur for max. 10% of every minute.

Pressure Drop in Motor

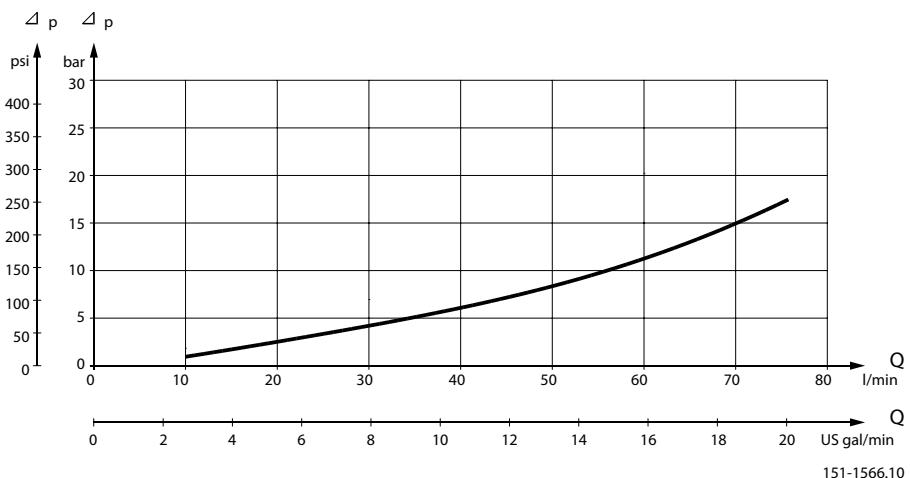


The curve applies to an unloaded motor shaft and an oil viscosity of 35 mm²/s [165 SUS]

Oil Flow in Drain Line

The table shows the max. oil flow in the drain line at a return pressure less than 5-10 bar [75-150 psi].

Pressure drop bar [psi]	Viscosity mm ² /s [SUS]	Oil flow in drain line l/min [US gal/min]
100 [1450]	20 [100]	2.5 [0.66]
	35 [165]	1.8 [0.78]
140 [2030]	20 [100]	3.5 [0.93]
	35 [165]	2.8 [0.74]

Direction of Shaft Rotation

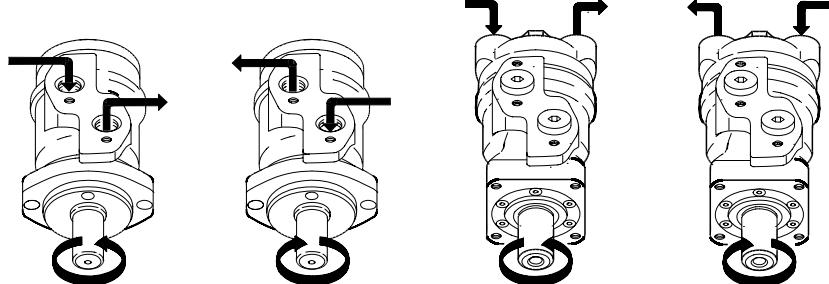

151-1836.10

**Permissible Shaft Loads
for OMR**

The permissible radial shaft load (P_R) depends on



- Speed (n)
- Distance (L) from the point of load to the mounting flange
- Mounting flange version
- Shaft version

Mounting flange	4-oval flange** 2-hole oval flange (European version)	4-hole oval flange	Square flange** 2-hole oval flange (US-version)
Shaft version	25 mm cylindrical shaft 1 in cylindrical shaft 1 in splined shaft	32 mm cylindrical shaft	25 mm cylindrical shaft
Permissible shaft load (P_R) - l in mm	$\frac{800}{n} \cdot \frac{250000}{95 + L}$ N*	$\frac{800}{n} \cdot \frac{187500}{95 + L}$ N*	$\frac{800}{n} \cdot \frac{250000}{101 + L}$ N*
Permissible shaft load (P_R) - l in inch	$\frac{800}{n} \cdot \frac{2215}{3.74 + L}$ lbf*	$\frac{800}{n} \cdot \frac{1660}{3.74 + L}$ lbf*	$\frac{800}{n} \cdot \frac{2215}{3.98 + L}$ lbf*

* $n \geq 200 \text{ min}^{-1}$ [rpm]; $\leq 55 \text{ mm}$ [2.2 in]

$n < 200 \text{ min}^{-1}$ [rpm]; $=> P_{Rmax} = 8000 \text{ N}$ [1800 lbf]

** For both European and US-version

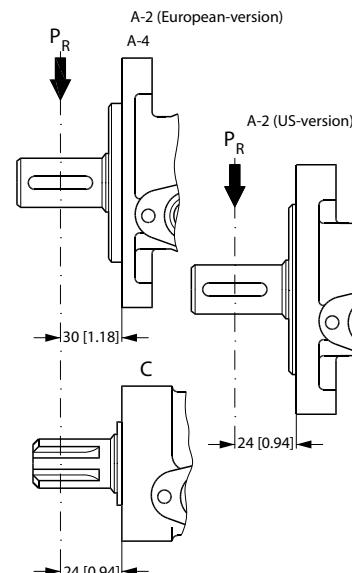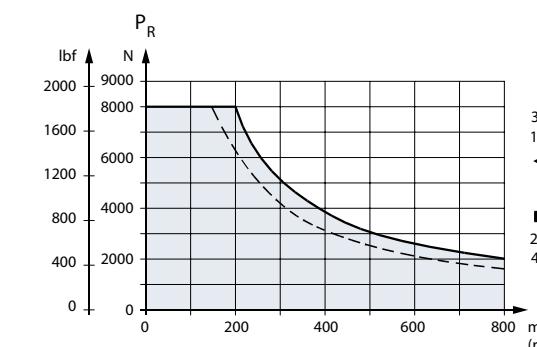

151-1203.10


----- cylindrical shaft 32 mm [1.26 in]
_____ other shaft versions

The curve shows the relation between P_R and n

- when $l = 30 \text{ mm}$ [1.18 in] for motors with A2 (European version) and A4 oval mounting flange
- when $l = 24 \text{ mm}$ [0.94 in] for motors with square mounting flange and A2 (US version)

For applications with special performance requirements we recommend OMR with the output shaft running in needle bearings.

**Permissible Shaft Load
for OMR N and OMR NF
with Needle Bearings**

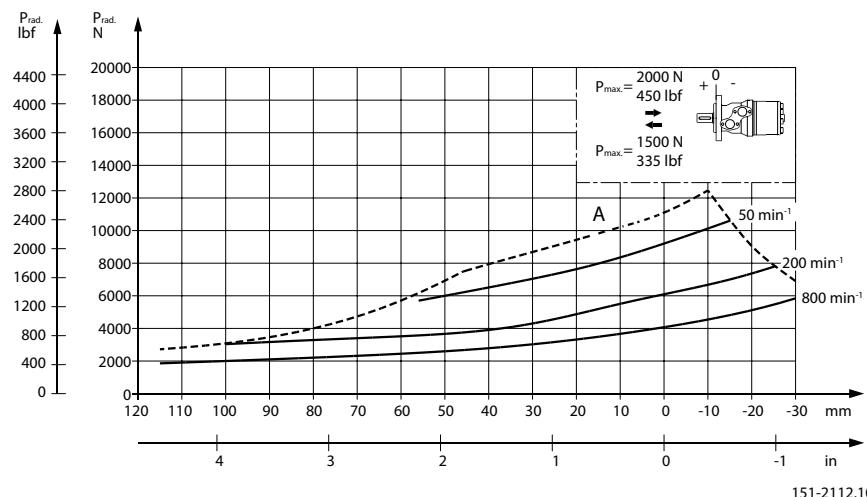

151-2112.10

The output shaft on OMR N and OMR NF runs in needle bearings. These bearings and the recessed mounting flange allow a higher permissible radial load in comparison to OMR motors with slide bearings.


The permissible radial load on the shaft is shown for different speeds as a function of the distance from the mounting flange to the point of load application.

Curve A shows max. radial shaft load. Any shaft load exceeding the values quoted in the curve will involve a risk of breakage.

The other curves apply to a B10 bearing life of 2000 hours at the number of revolutions indicated by the curve letter. Mineral based hydraulic oil with a sufficient content of anti-wear additives must be used.

Bearing life calculations can be made using the explanation and formula provided in the chapter »Bearing dimensioning« in the technical information "General" DHMH.PK.100. G2.02 520L0232.

**Permissible Shaft Load
for OMRW N and OMRW
NF with Needle Bearings**

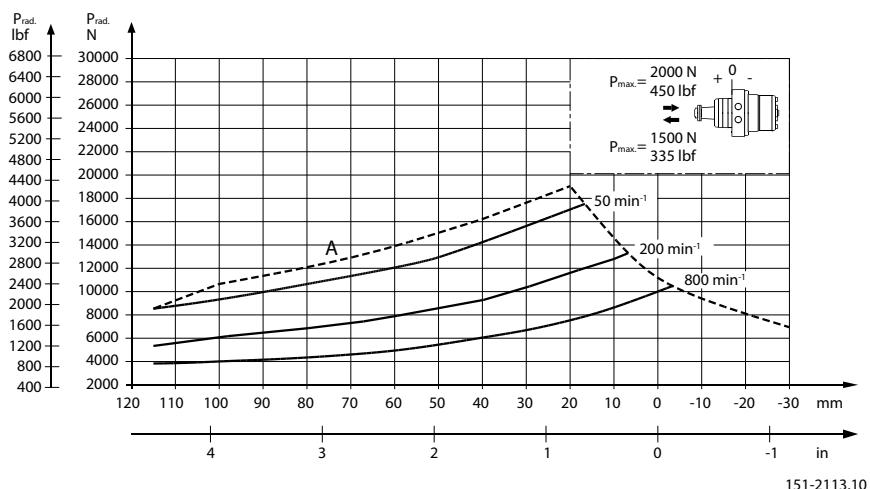

The output shaft on OMRW N runs in needle bearings. These bearings and the recessed mounting flange allow a higher permissible radial load in comparison to OMR motors with slide bearings.



The permissible radial load on the shaft is shown for different speeds as a function of the distance from the mounting flange to the point of load application.

Curve A shows max. radial shaft load. Any shaft load exceeding the values quoted in the curve will involve a risk of breakage.

The other curves apply to a B10 bearing life of 2000 hours at the number of revolutions indicated by the curve letter. Mineral based hydraulic oil with a sufficient content of anti-wear additives must be used.

Bearing life calculations can be made using the explanation and formula provided in the chapter »Bearing dimensioning« in the technical information "General" DHMH.PK.100. G2.02 520L0232.

Function Diagrams

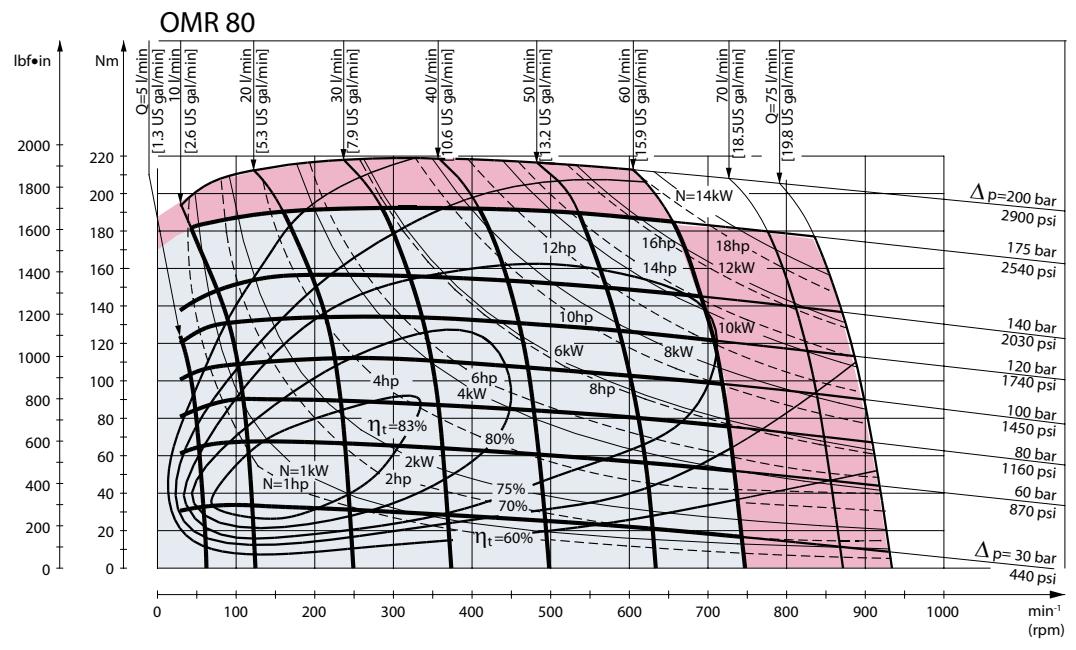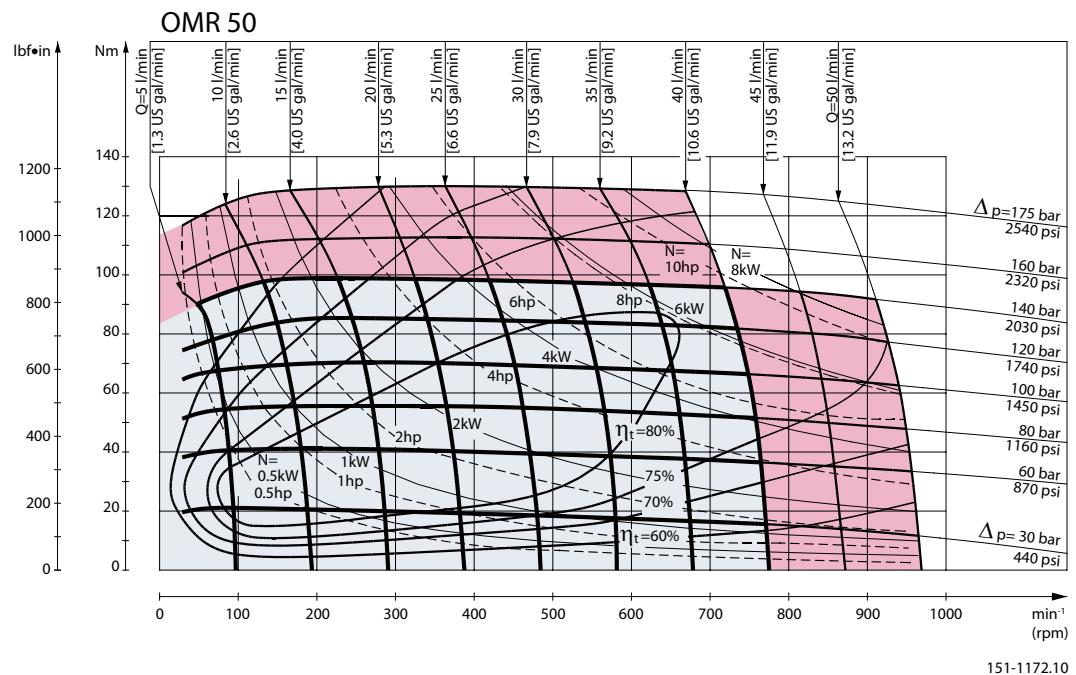

Explanation of function diagram use, basis and conditions can be found on page 7.



■ Continuous range

■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/interruption pressure drop for the actual shaft version can be found on page 42 - 44.

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

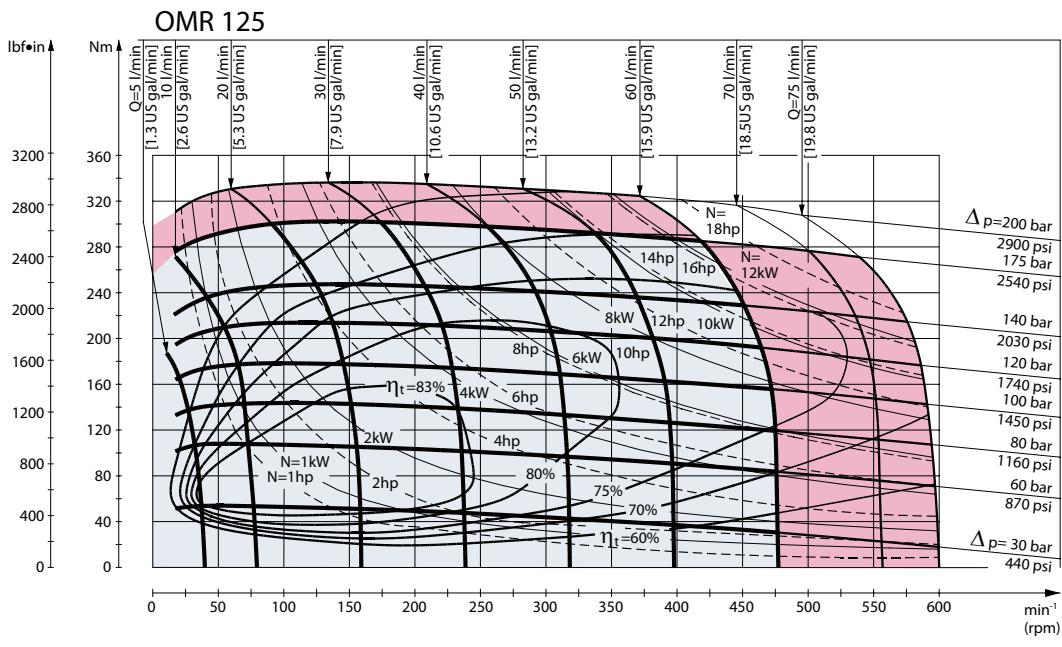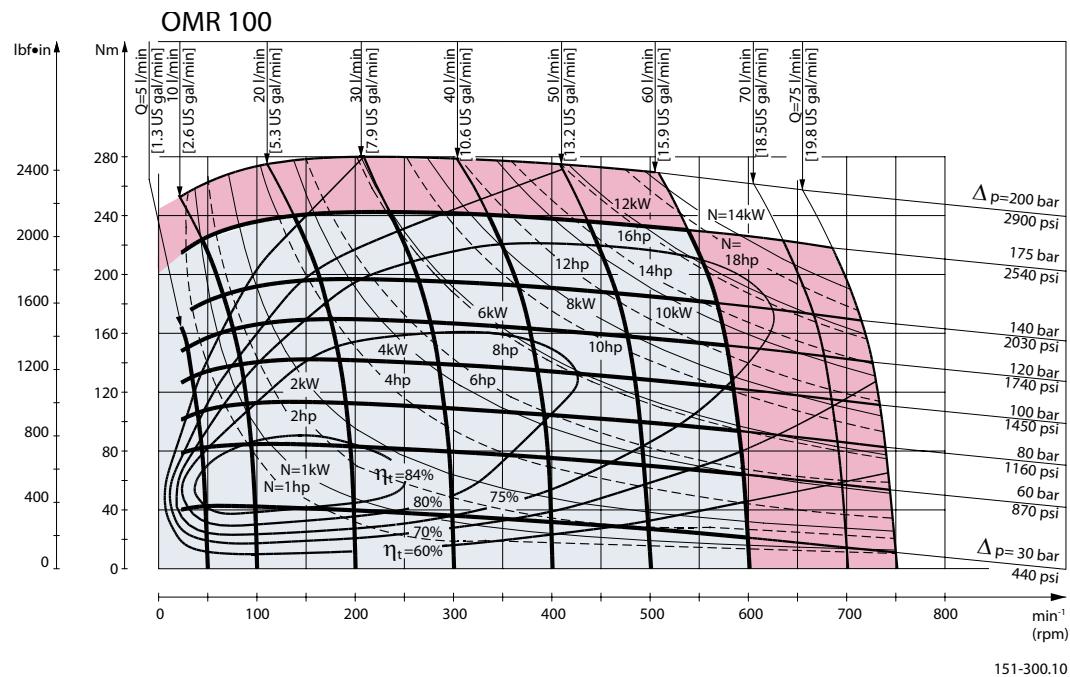

Explanation of function diagram use, basis and conditions can be found on page 7.



■ Continuous range

■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/intermittent pressure drop for the actual shaft version can be found on page 42 - 44.

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

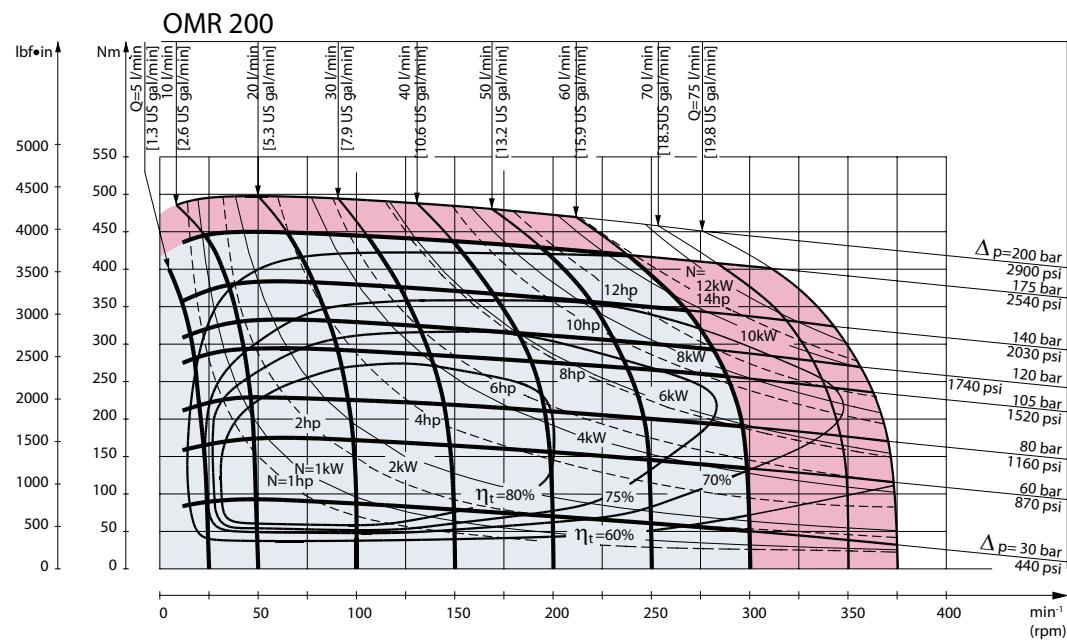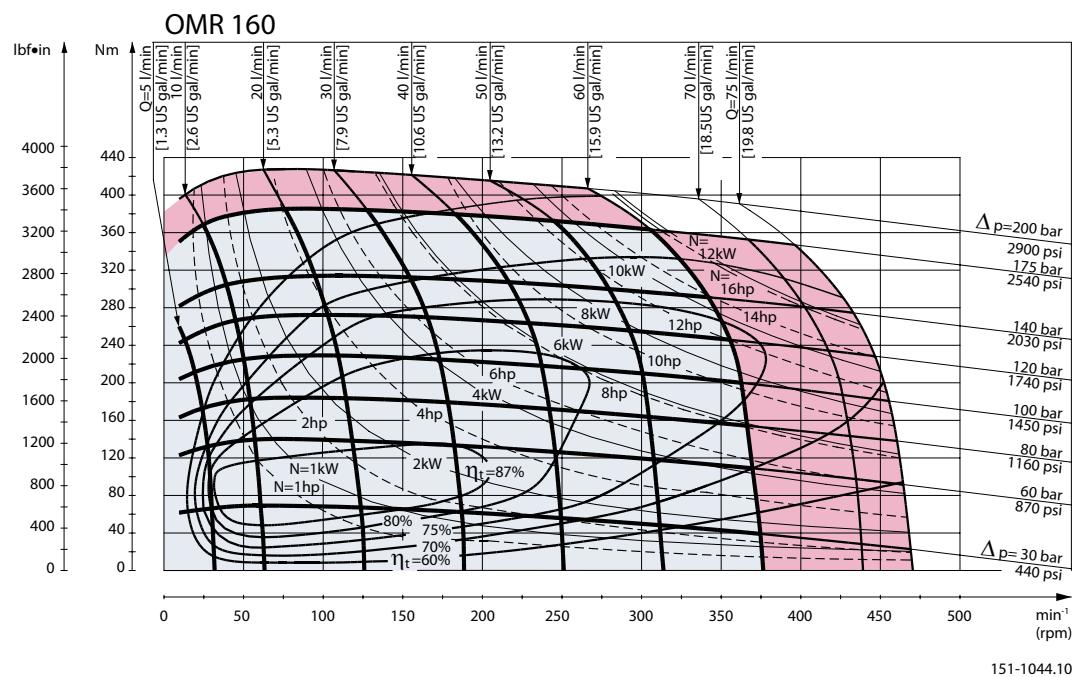

Explanation of function diagram use, basis and conditions can be found on page 7.



■ Continuous range

■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/intermittent pressure drop for the actual shaft version can be found on page 42 - 44.

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

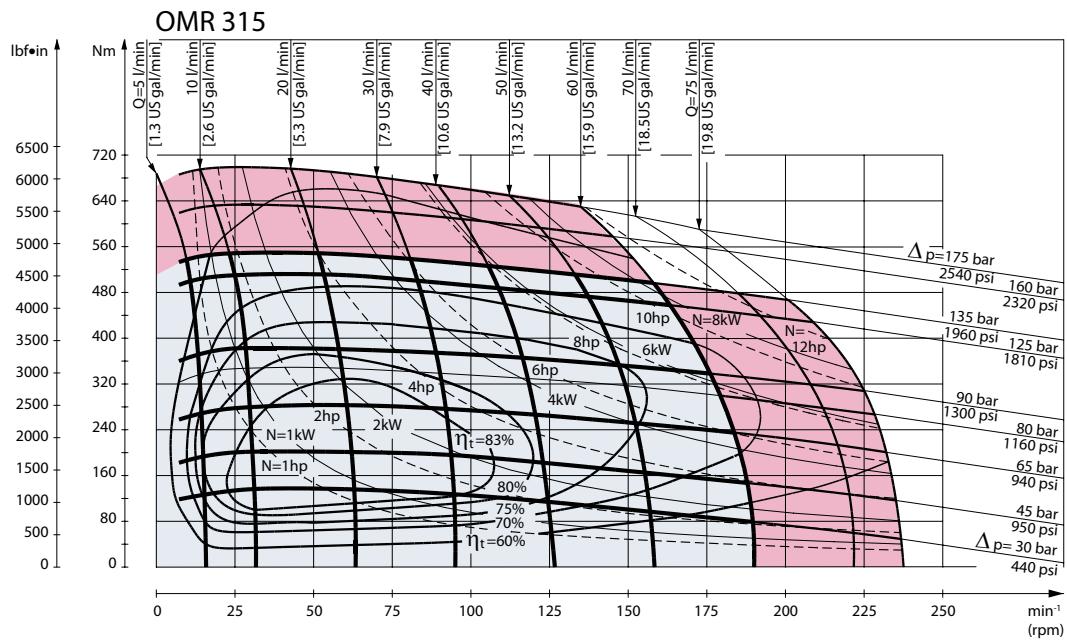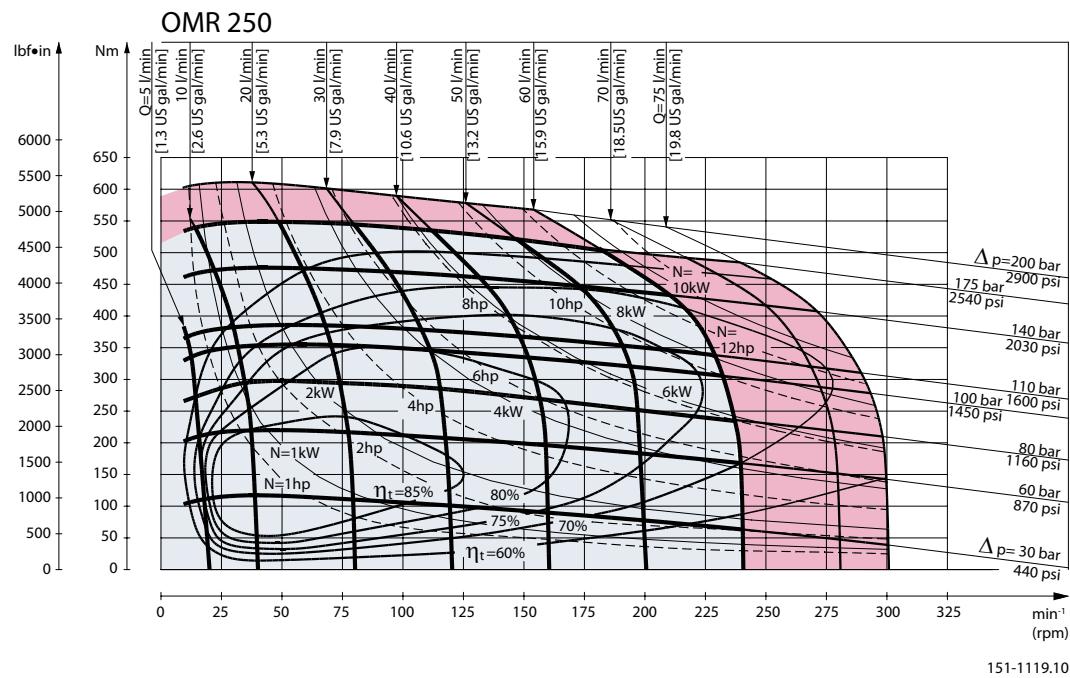

Explanation of function diagram use, basis and conditions can be found on page 7.


■ Continuous range

■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/interruption pressure drop for the actual shaft version can be found on page 42 - 44.

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

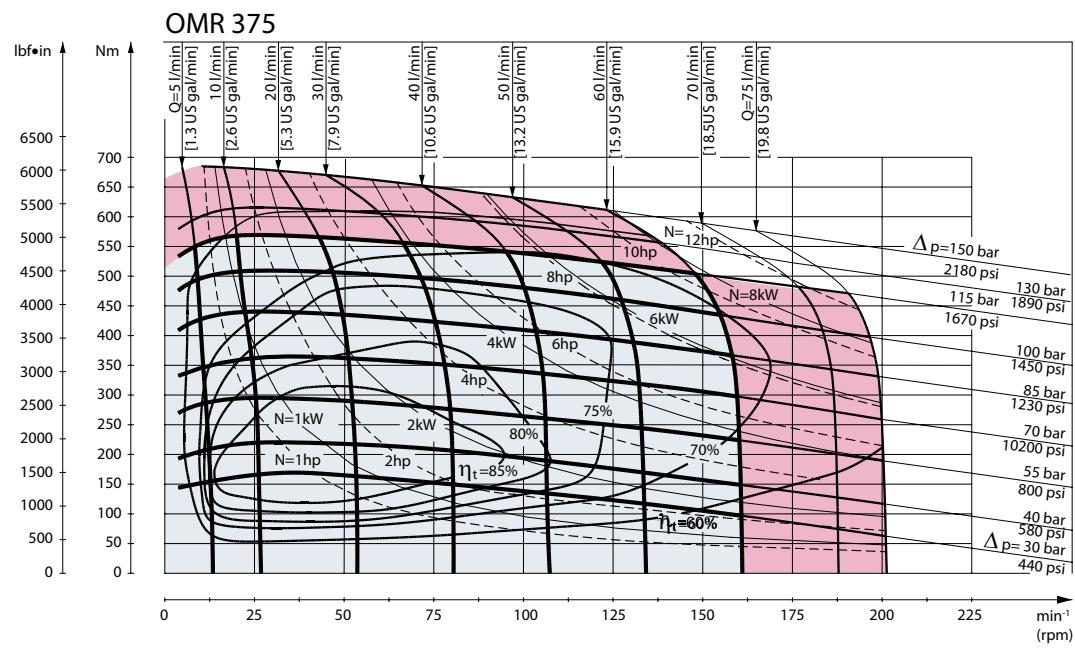

Shaft Version


A: Cylindrical shaft

25 mm

D: Parallel key

A8 • 7 • 32

DIN 6885

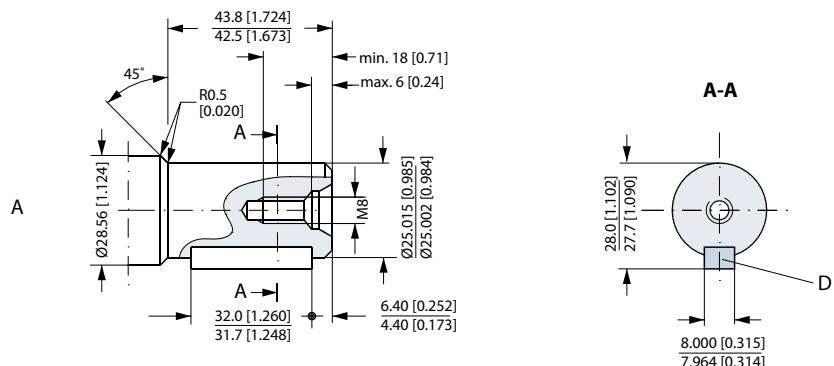


B: Cylindrical shaft 1 in

E: Parallel key

1/4 • 1/4 • 1 1/4 in

B.S. 46

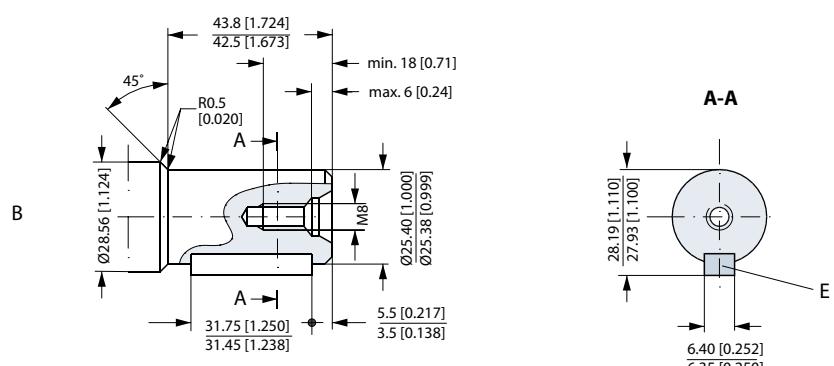

US version


C: Cylindrical shaft

1 in

F: Parallel key


1/4 • 1/4 • 1 1/4 in

B.S. 46

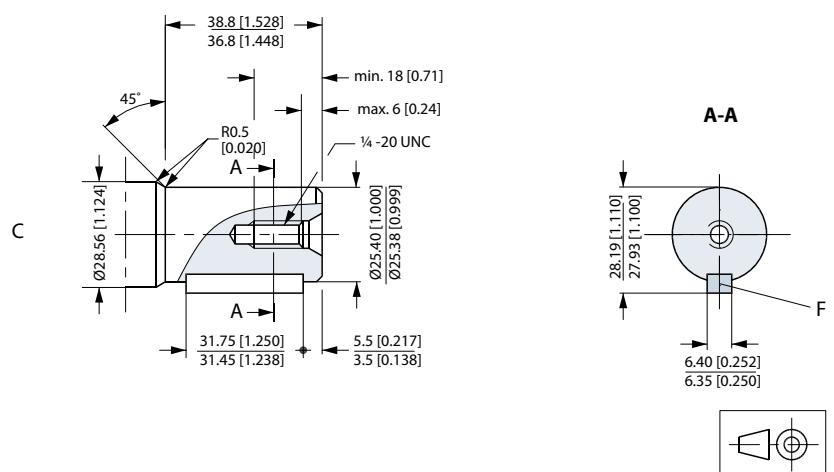

Shaft Version


D: Cylindrical shaft
32 mm
G: Parallel key
A10 • 8 • 45
DIN 6885

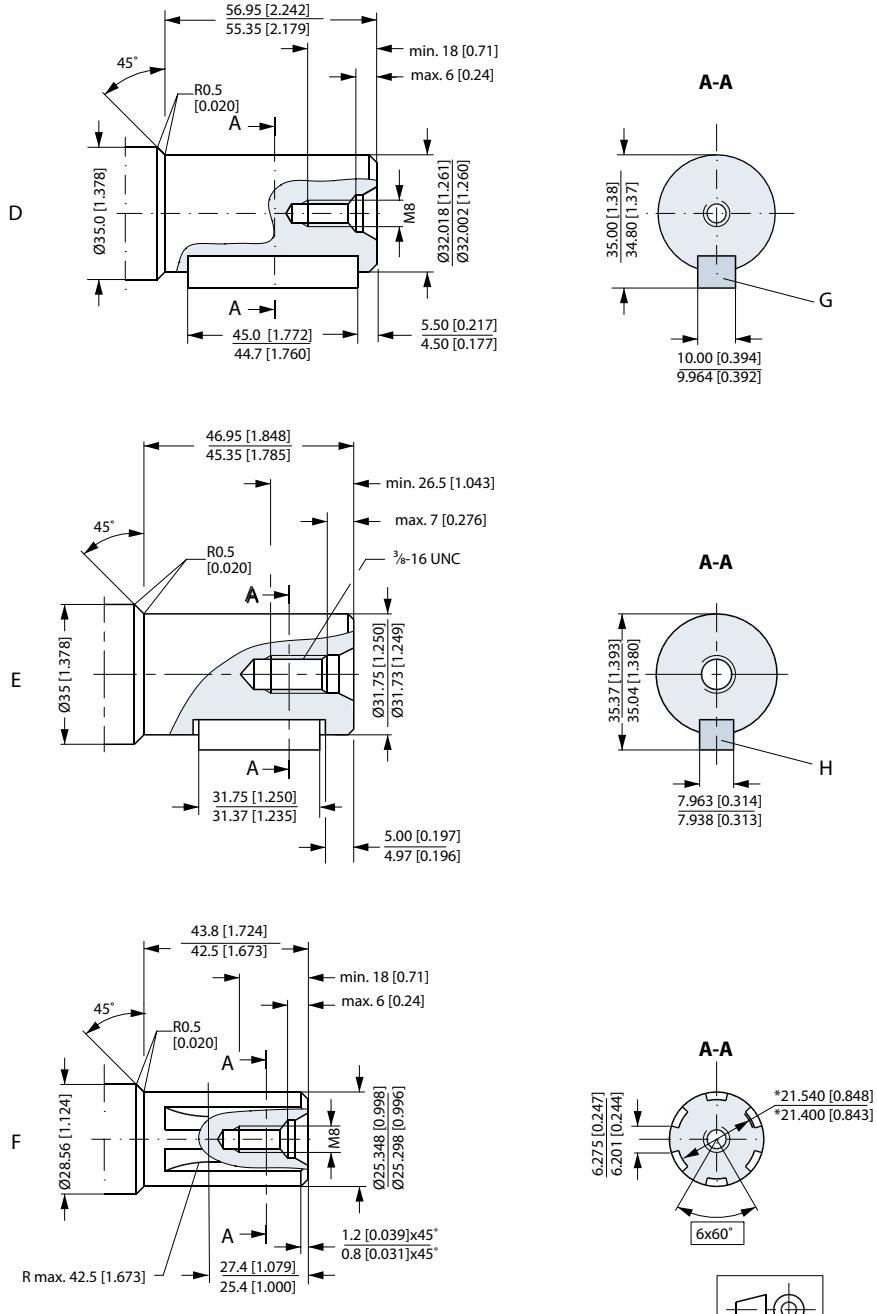

F: Involute splined shaft
B.S. 2059 (SAE 6 B)

Straight-sided,
bottom fitting, deep.
Fit 2
Nom. size 1 in

*Deviates from
B.S. 2059 (SAE 6 B)

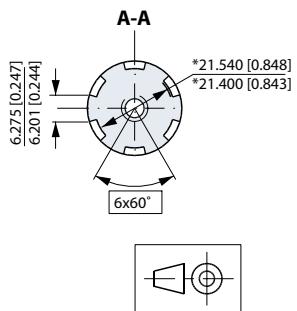


151-1851.12

Shaft Version

US version



G: Splined shaft
SAE 6 B (B.S. 2059)
Straight-sided,
bottom fitting, deep.
Fit 2
Nom. size 1 in
* Deviates from
SAE 6 B (B.S. 2059)

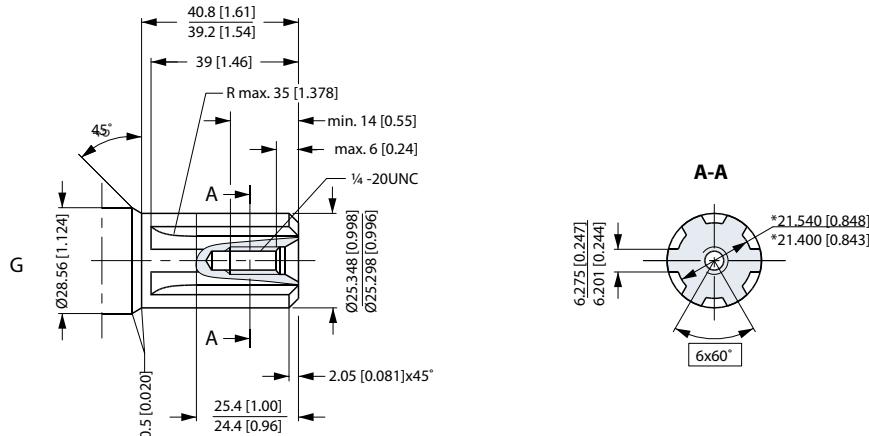

H: Tapered shaft 28.5 mm
(ISO/R775)

K: DIN 937
NV 30
Tightening torque:
 $100 \pm 10 \text{ N}\cdot\text{m}$ [$885 \pm 85 \text{ lbf}\cdot\text{in}$]



J: Taper 1:10
L: Parallel key
B5 • 5 • 14
DIN 6885

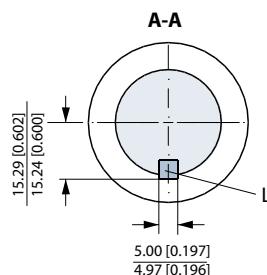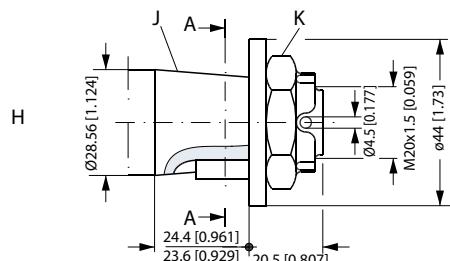

I: Tapered shaft 35 mm

N: DIN 937
NV 41
Tightening torque:
 $200 \pm 10 \text{ N}\cdot\text{m}$ [$1770 \pm 85 \text{ lbf}\cdot\text{in}$]

M: Taper 1:10
P: Parallel key
B6 • 6 • 20
DIN 6885

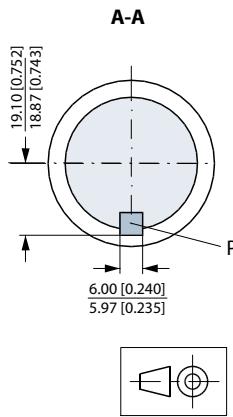
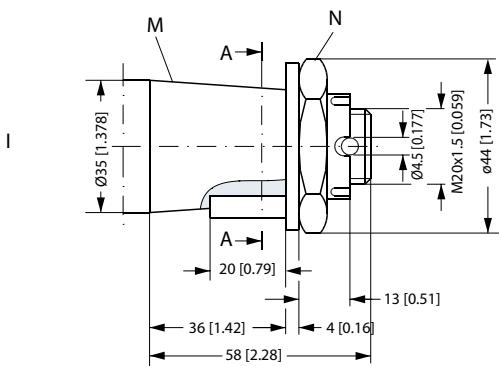


151-1847 11

Shaft Version


- J: Tapered shaft 1 1/4 in
 K: Cone 1:8
 SAE J501
 L: 1 - 20 UNEF
 Across flats 1 7/16
 Tightening torque:
 $200 \pm 10 \text{ Nm} [1770 \pm 85 \text{ lbf-in}]$
 M: Parallel key
 $\frac{5}{16} \cdot \frac{5}{16} \cdot 1 \frac{1}{4}$
 SAE J501

J

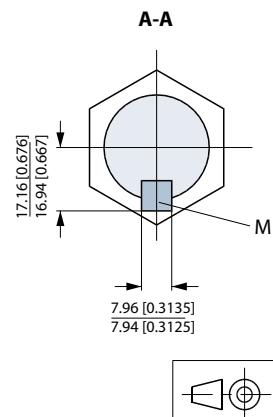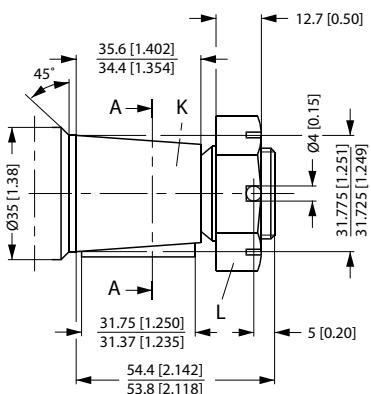

151-1848.11


Port Thread Versions

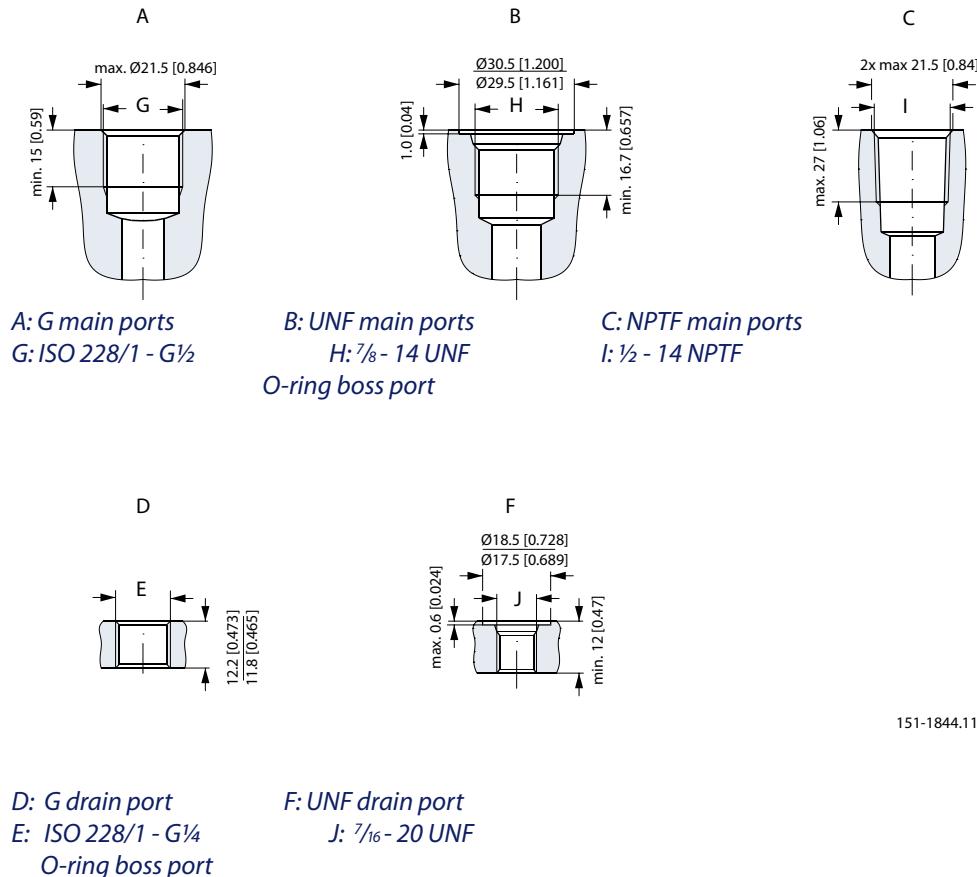

151-1844.11

Manifold Mount

European version

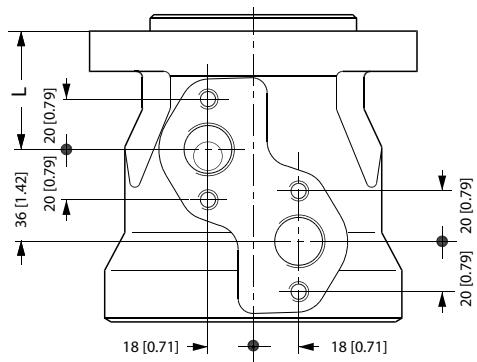


L: see dimensional drawing for given OMR motor on pages 61-74

151-2135.10

Dimensions


*Side port version with 2-hole oval mounting flange (A2 flange).
With high pressure shaft seal*

Type	Max. L mm [in]	L ₁ mm [in]
OMR 50	136.5 [5.37]	9.0 [0.35]
OMR 80	141.5 [5.57]	14.0 [0.55]
OMR 100	145.0 [5.71]	17.4 [0.69]
OMR 125	149.5 [5.89]	21.8 [0.86]
OMR 160	155.5 [6.12]	27.8 [1.09]
OMR 200	162.5 [6.40]	34.8 [1.37]
OMR 250	171.5 [6.75]	43.5 [1.71]
OMR 315	182.5 [7.19]	54.8 [2.16]
OMR 375	192.7 [7.59]	65.0 [2.56]

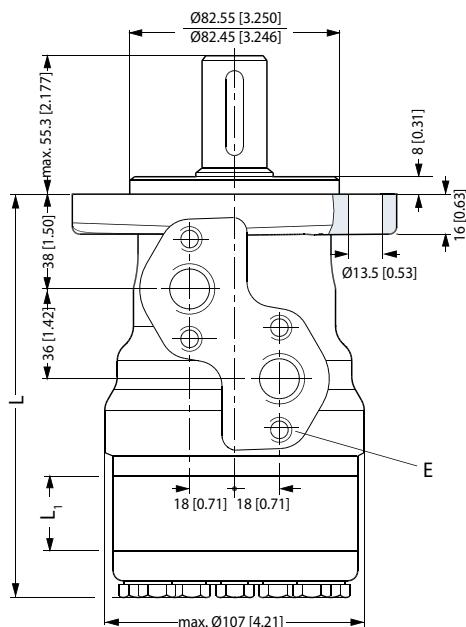

D: G ½; 15 mm [0.59 in] deep

E: M8; 13 mm [0.51 in] deep
(4 pcs.)

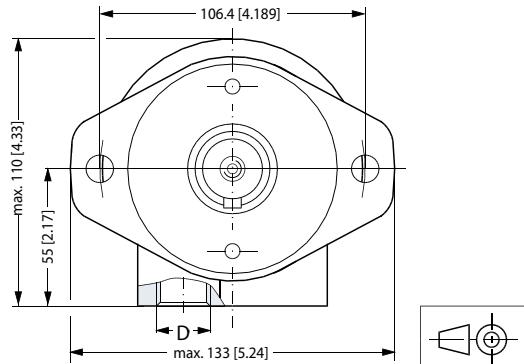

151-1750.11

Dimensions

*Side port version with 2-hole oval mounting flange (A2 flange).
With check valves and drain connection.
With high pressure shaft seal.*


Type	Max. L mm [in]	L ₁ mm [in]
OMR 50	136.5 [5.37]	9.0 [0.35]
OMR 80	141.5 [5.57]	14.0 [0.55]
OMR 100	145.0 [5.71]	17.4 [0.69]
OMR 125	149.5 [5.89]	21.8 [0.86]
OMR 160	155.5 [6.12]	27.8 [1.09]
OMR 200	162.5 [6.40]	34.8 [1.37]
OMR 250	171.5 [6.75]	43.5 [1.71]
OMR 315	182.5 [7.19]	54.8 [2.16]
OMR 375	192.7 [7.59]	65.0 [2.56]

C: Drain connection

G ¼; 15 mm [0.47 in] deep

D: G ½; 15 mm [0.59 in] deep

E: M8; 13 mm [0.51 in] deep
(4 pcs.)

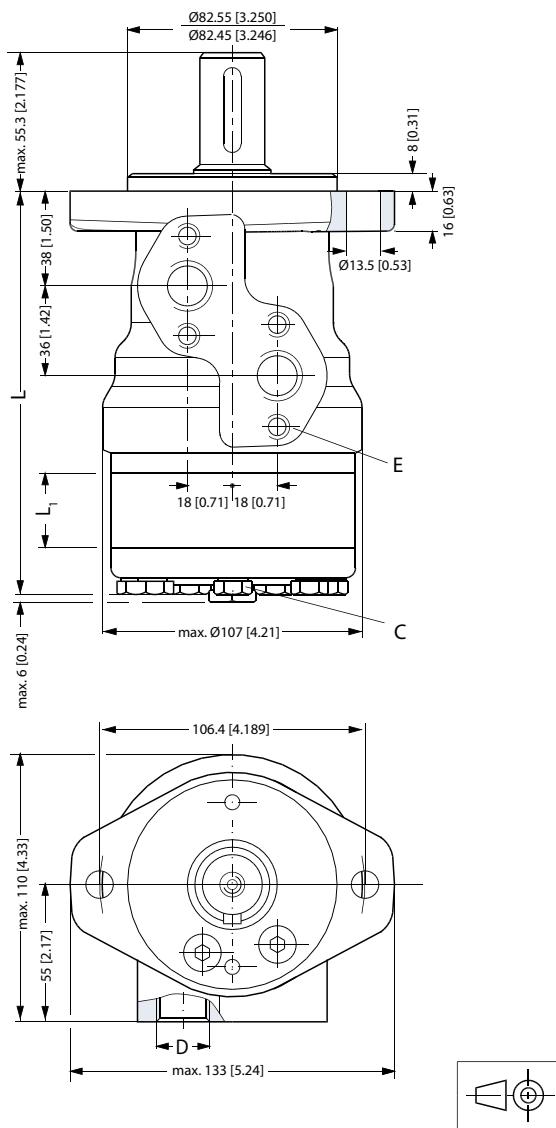

151-1845.11

Dimensions

*OMR, OMR C and OMR N
Side port version with 2-hole oval mounting flange (A2 flange)*

Output shaft.max.	mm L ₂ [in]
Cylindrical shaft 32 mm [1.26 in]	68.3 [2.69]
Cylindrical shaft 25 mm [0.98 in]	55.3 [2.18]
Tapered shaft 28.56 mm [1.12 in]	56.3 [2.19]


Type	Max. L mm [in]	L ₁ mm [in]
OMR 50	136.5 [5.37]	9.0 [0.35]
OMR 80	141.5 [5.57]	14.0 [0.55]
OMR 100	145.0 [5.71]	17.4 [0.69]
OMR 125	149.5 [5.89]	21.8 [0.86]
OMR 160	155.5 [6.12]	27.8 [1.09]
OMR 200	162.5 [6.40]	34.8 [1.37]
OMR 250	171.5 [6.75]	43.5 [1.71]
OMR 315	182.5 [7.19]	54.8 [2.16]
OMR 375	192.7 [7.59]	65.0 [2.56]

C: Drain connection

G 1/4; 12 mm [0.47 in] deep

D: G 1/2; 15 mm [0.59 in] deep

E: M8; 13 mm [0.51 in] deep
(4 pcs.)

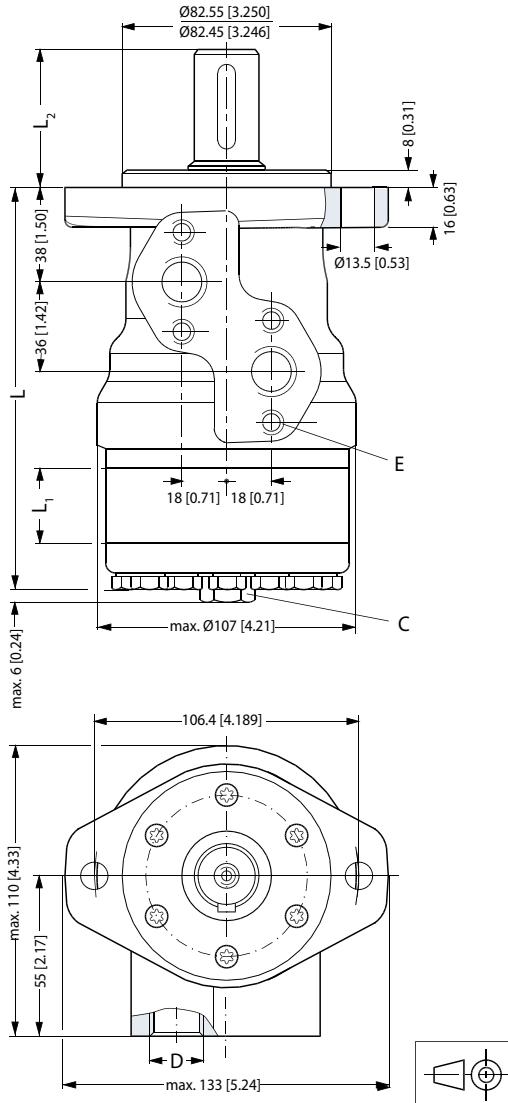


151-1849.13

Dimensions

End port version with 2-hole oval mounting flange (A2-flange)

Type	Max. L mm [in]	L ₁ mm [in]
OMR 50	151.6 [5.96]	9.0 [0.35]
OMR 80	156.6 [6.17]	14.0 [0.55]
OMR 100	160.0 [6.30]	17.4 [0.69]
OMR 125	164.4 [6.47]	21.8 [0.86]
OMR 160	170.4 [6.71]	27.8 [1.09]
OMR 200	177.4 [6.98]	34.8 [1.37]
OMR 250	186.1 [7.33]	43.5 [1.71]
OMR 315	197.4 [7.77]	54.8 [2.16]
OMR 375	207.6 [8.17]	65.0 [2.56]

C: G 1/4; 12 mm [0.47 in] deep
D: G 1/2; 15 mm [0.59 in] deep

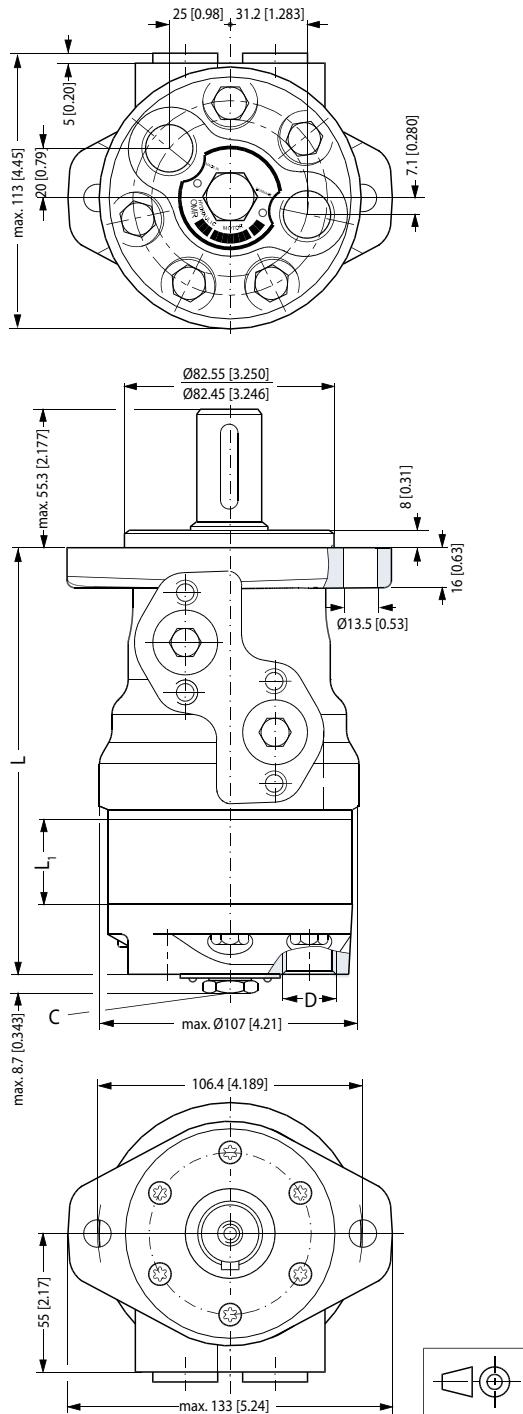

151-1752.11

Dimensions

Side port version with 2-hole oval mounting flange (A2-flange)

Type	Max. L mm [in]	L ₁ mm [in]
OMR 50	142.5 [5.61]	9.0 [0.35]
OMR 80	147.5 [5.81]	14.0 [0.55]
OMR 100	151.0 [5.95]	17.4 [0.69]
OMR 125	155.4 [6.12]	21.8 [0.86]
OMR 160	161.5 [6.36]	27.8 [1.09]
OMR 200	168.5 [6.63]	34.8 [1.37]
OMR 250	177.5 [6.99]	43.5 [1.71]
OMR 315	188.5 [7.42]	54.8 [2.16]
OMR 375	198.5 [7.82]	64.8 [2.56]


C: Drain connection

7/16 - 20 mm UNF;
12 mm [0.47 in] deep

D: 7/8 - 14 UNF;

16.76 mm [0.66 in] deep

E: M8; 13 mm [0.51 in] deep
(4-off)

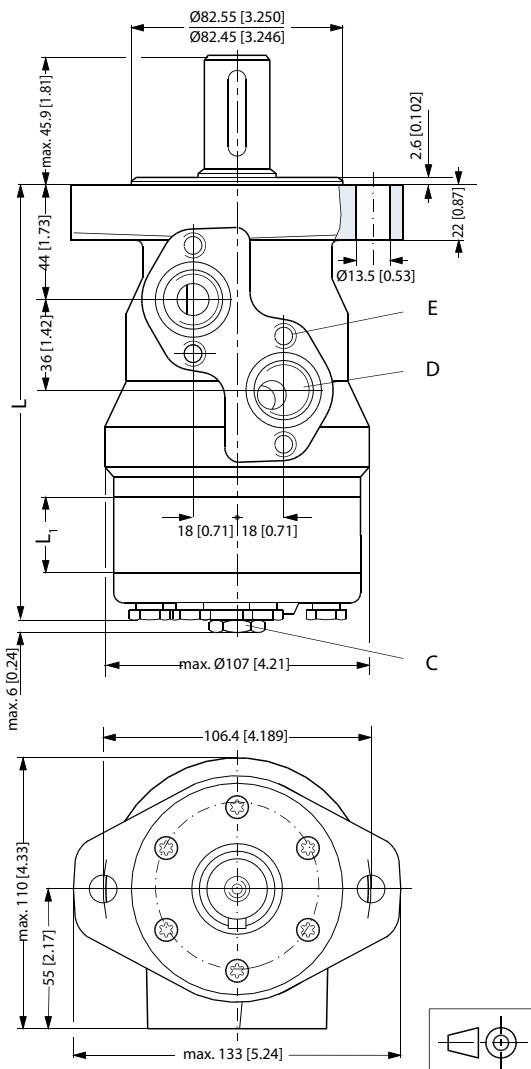

151-1223.11


Dimensions

Side port version with 4-hole oval mounting flange (A4 flange)

Output shaft.max.	mm L ₂ [in]
Cylindrical shaft 32 mm [1.26 in]	68.3 [2.69]
Cylindrical shaft 25 mm [0.98 in]	55.3 [2.18]
Tapered shaft 28.56 mm [1.12 in]	56.3 [2.19]

Type	Max. L mm [in]	L ₁ ,mm [in]
OMR 50	136.5 [5.37]	9.0 [0.35]
OMR 80	141.5 [5.57]	14.0 [0.55]
OMR 100	145.0 [5.71]	17.4 [0.69]
OMR 125	149.5 [5.89]	21.8 [0.86]
OMR 160	155.5 [6.12]	27.8 [1.09]
OMR 200	162.5 [6.40]	34.8 [1.37]
OMR 250	171.5 [6.75]	43.5 [1.71]
OMR 315	182.5 [7.19]	54.8 [2.16]
OMR 375	192.7 [7.59]	65.0 [2.56]

- C: Drain connection
G ¼; 15 mm [0.47 in] deep
- D: G ½; 15 mm [0.59 in] deep
- E: M8; 13 mm [0.51 in] deep
(4 pcs.)

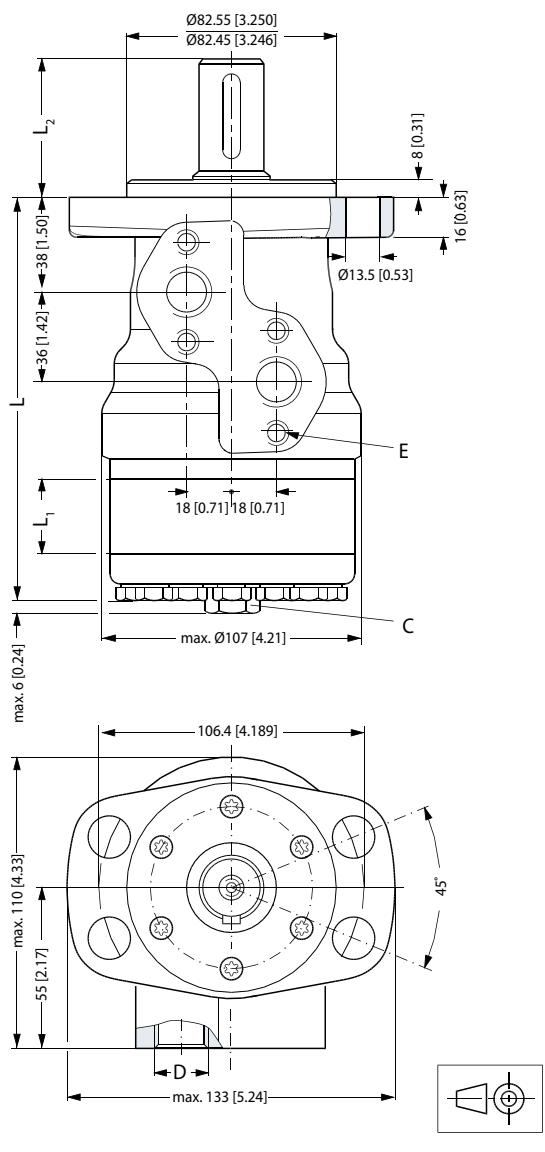

Dimensions

Side port version with 4-hole oval mounting flange (A4-flange)


Type	Max. L mm [in]	L ₁ mm [in]
OMR 50	136.5 [5.37]	9.0 [0.35]
OMR 80	141.5 [5.57]	14.0 [0.55]
OMR 100	145.0 [5.71]	17.4 [0.69]
OMR 125	149.5 [5.89]	21.8 [0.86]
OMR 160	155.5 [6.12]	27.8 [1.09]
OMR 200	162.5 [6.40]	34.8 [1.37]
OMR 250	171.5 [6.75]	43.5 [1.71]
OMR 315	182.5 [7.19]	54.8 [2.16]
OMR 375	192.7 [7.59]	65.0 [2.56]

C: Drain connection

7/16 - 20 UNF;
12 mm [0.47 in] deep

D: 7/8 - 14 UNF;
17 mm [0.66 in] deep

E: M8; 13 mm [0.51 in] deep
(4-off)

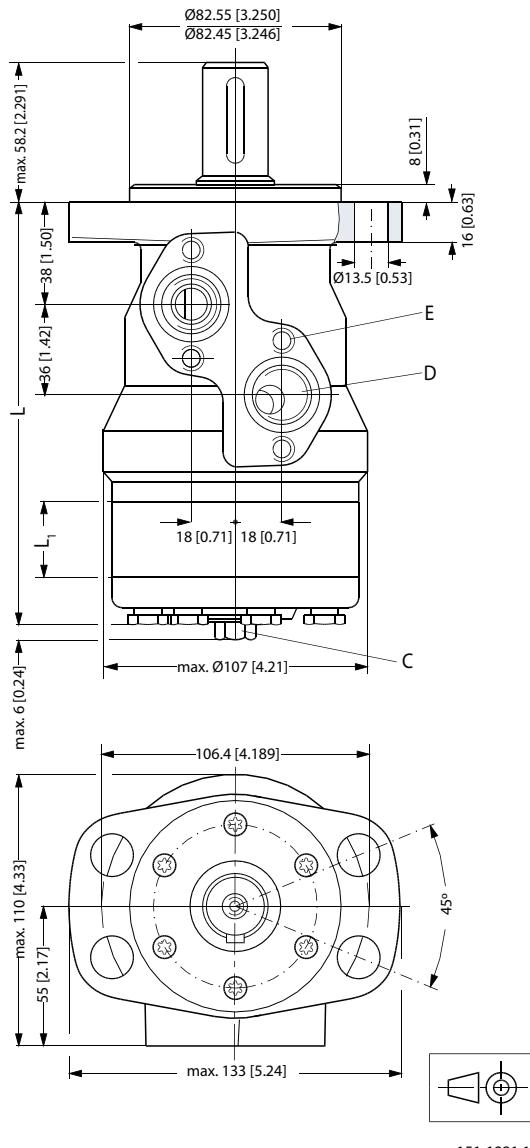

Dimensions

End port version with square mounting flange (C-flange)


Type	Max. L mm [in]	L ₁ mm [in]
OMR 50	157.6 [6.21]	9.0 [0.35]
OMR 80	162.6 [6.40]	14.0 [0.55]
OMR 100	166.0 [6.54]	17.4 [0.69]
OMR 125	170.4 [6.71]	21.8 [0.86]
OMR 160	176.4 [6.95]	27.8 [1.09]
OMR 200	183.4 [7.22]	34.8 [1.37]
OMR 250	192.1 [7.56]	43.5 [1.71]
OMR 315	203.4 [8.02]	54.8 [2.16]
OMR 375	213.5 [8.41]	65.0 [2.56]

C: Drain connection

G 1/4; 12 mm [0.47 in] deep

D: G 1/2; 15 mm [0.59 in] deep

E: M10; 15 mm [0.59 in] deep
(4 pcs.)

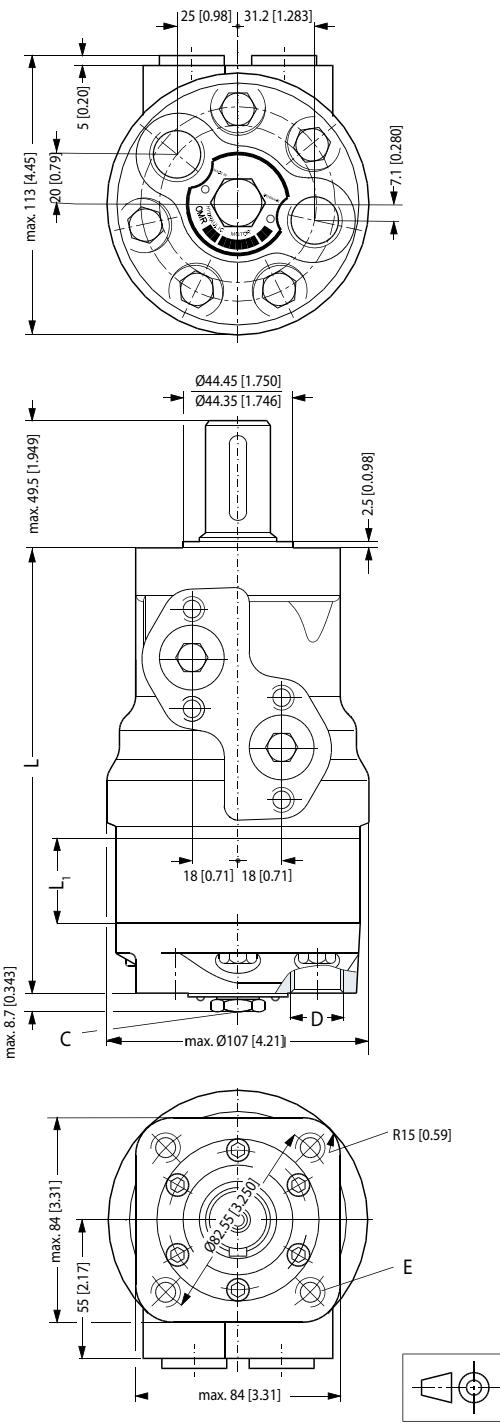

151-1753.11

Dimensions

Side port version with square mounting flange (C-flange)

Type	Max. L mm [in]	L ₁ mm [in]
OMR 50	142.5 [5.61]	9.0 [0.35]
OMR 80	147.5 [5.81]	14.0 [0.55]
OMR 100	151.0 [5.95]	17.4 [0.69]
OMR 125	155.4 [6.12]	21.8 [0.86]
OMR 160	161.5 [6.36]	27.8 [1.09]
OMR 200	168.5 [6.63]	34.8 [1.37]
OMR 250	177.5 [6.99]	43.5 [1.71]
OMR 315	188.5 [7.42]	54.8 [2.16]
OMR 375	198.7 [7.82]	65.0 [2.56]

C: Drain connection

7/16 - 20 mm UNF;
12 mm [0.47 in] deep


D: 7/8 - 14 UNF;

17 mm [0.66 in] deep

E: M8; 13 mm [0.51 in] deep (4-off)

F: 3/8 - 16 UNC;

15 mm [0.59 in] deep (4-off)

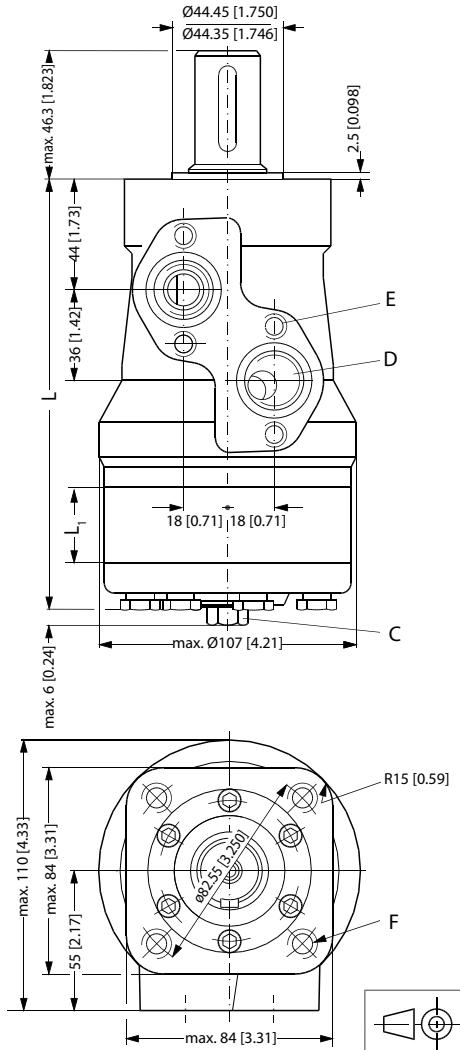


151-1220 11

Dimensions

Type	Max. L mm [in]	L ₁ mm [in]
OMRW 50 N	107.0 [4.21]	9.0 [0.35]
OMRW 80 N	112.0 [4.41]	14.0 [0.55]
OMRW 100 N	115.4 [4.54]	17.4 [0.69]
OMRW 125 N	119.8 [4.72]	21.8 [0.86]
OMRW 160 N	125.8 [4.95]	27.8 [1.09]
OMRW 200 N	132.8 [5.23]	34.8 [1.37]
OMRW 250 N	141.5 [5.57]	43.5 [1.71]
OMRW 315 N	153.0 [6.02]	54.8 [2.16]
OMRW 375 N	163.0 [6.42]	65.0 [2.56]


OMRW N wheel motor

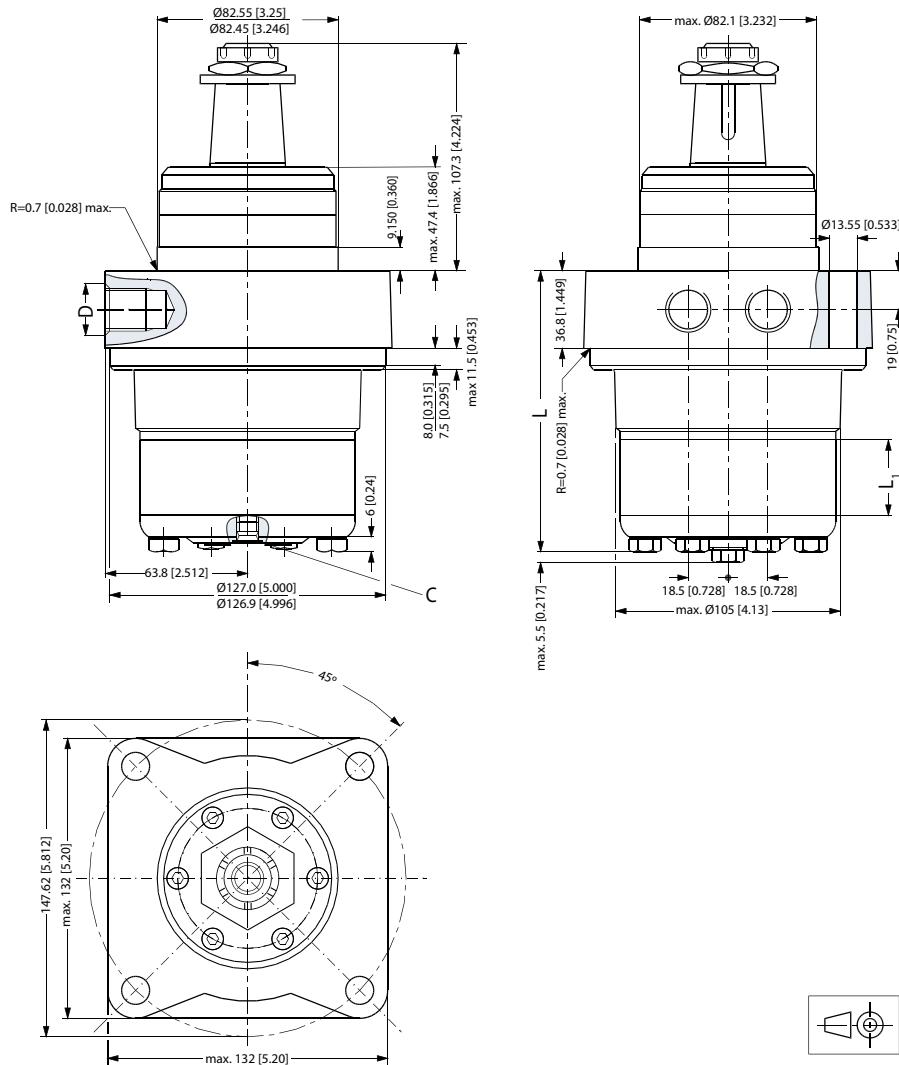

Dimensions

OMRW N wheel motor

Type	Max. L mm [in]	L ₁ mm [in]
OMRW 50 N	107.0 [4.21]	9.0 [0.35]
OMRW 80 N	112.0 [4.41]	14.0 [0.55]
OMRW 100 N	115.4 [4.54]	17.4 [0.69]
OMRW 125 N	119.8 [4.72]	21.8 [0.86]
OMRW 160 N	125.8 [4.95]	27.8 [1.09]
OMRW 200 N	132.8 [5.23]	34.8 [1.37]
OMRW 250 N	141.5 [5.57]	43.5 [1.71]
OMRW 315 N	153.0 [6.02]	54.8 [2.16]
OMRW 375 N	163.0 [6.42]	65.0 [2.56]

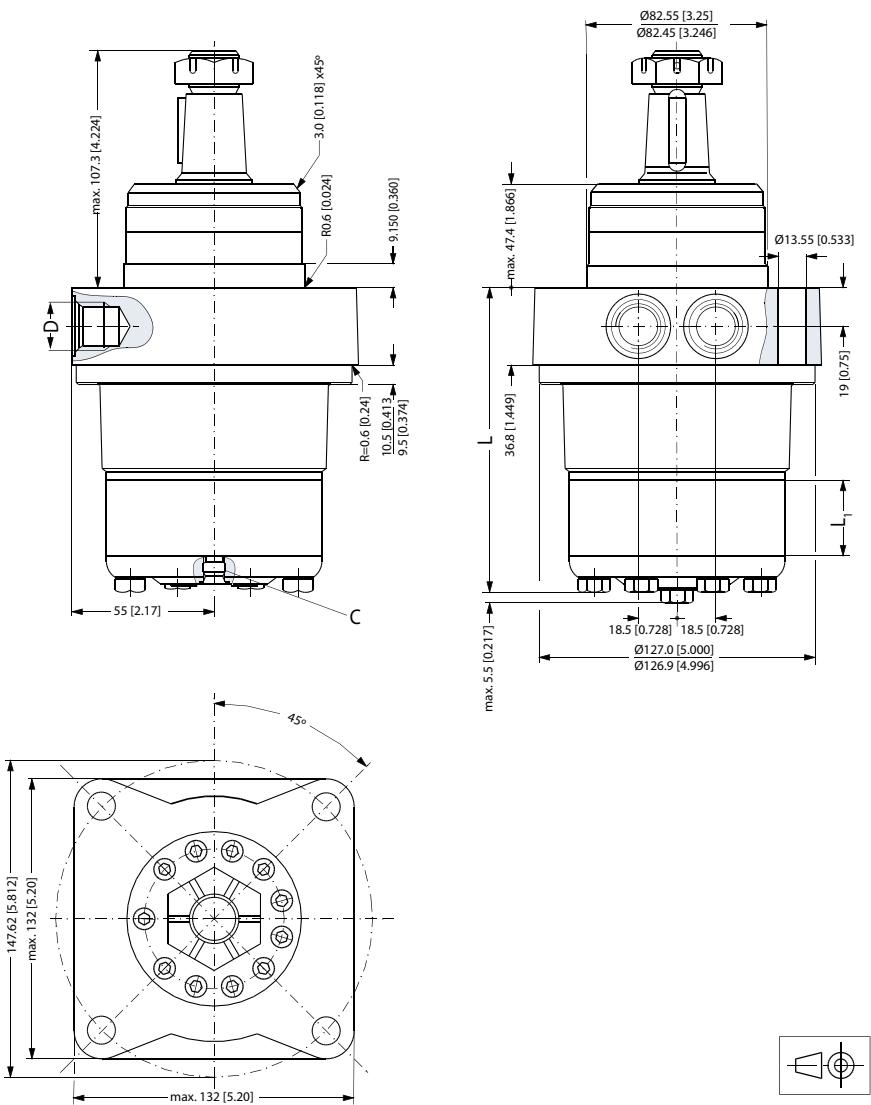

C: Drain connection

7/16 - 20 UNF;

12 mm [0.47 in] deep

D: 7/8 - 14 UNF;

17 mm [0.66 in] deep

151-1625 11

Dimensions

OMR F motor

Type	Max. L mm [in]	L ₁ mm [in]	L ₂ mm [in]	L ₃ mm [in]
OMR 80 F	241.3 [9.50]	14.0 [0.55]	187.3 [7.37]	210.8 [8.30]
OMR 100 F	244.7 [9.63]	17.4 [0.69]	190.7 [7.51]	214.2 [8.43]
OMR 125 F	249.1 [9.81]	21.8 [0.86]	195.1 [7.68]	218.6 [8.61]
OMR 160 F	255.1 [10.04]	27.8 [1.09]	201.1 [7.92]	224.6 [8.84]
OMR 200 F	262.1 [10.32]	34.8 [1.37]	208.1 [8.19]	231.6 [9.12]
OMR 250 F	270.8 [10.66]	43.5 [1.71]	216.8 [8.54]	240.3 [9.46]
OMR 315 F	282.1 [11.11]	54.8 [2.16]	228.1 [8.98]	251.6 [9.91]
OMR 375 F	292.3 [11.51]	65.0 [2.56]	238.3 [9.38]	261.8 [10.31]


C: Drain connection

G 1/4; 12 mm [0.47 in] deep

D: G 1/2; 15 mm [0.59 in] deep

E: M8; 13 mm [0.51 in] deep

F: Brake release connection G 1/4

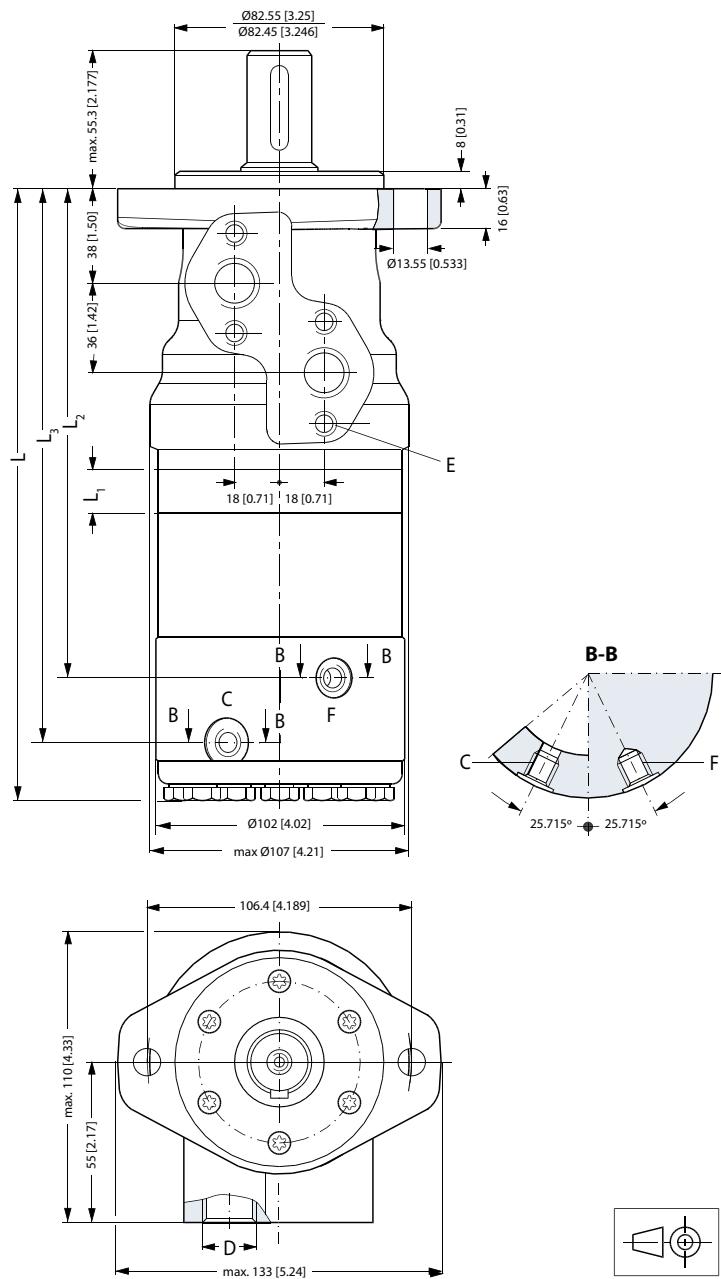

151-1719.11

Dimensions

OMR NF motor

Type	Max. L mm [in]	L ₁ mm [in]	L ₂ mm [in]	L ₃ mm [in]
OMR 80 NF	247.3 [9.74]	14.0 [0.55]	193.3 [7.61]	216.8 [8.54]
OMR 100 NF	250.7 [9.87]	17.4 [0.69]	196.7 [7.74]	220.2 [8.67]
OMR 125 NF	255.1 [10.04]	21.8 [0.86]	201.1 [7.92]	224.6 [8.84]
OMR 160 NF	261.1 [10.28]	27.8 [1.09]	207.1 [8.15]	230.6 [9.08]
OMR 200 NF	268.1 [10.55]	34.8 [1.37]	214.1 [8.43]	237.6 [9.35]
OMR 250 NF	276.8 [10.90]	43.5 [1.71]	222.8 [8.77]	246.3 [9.70]
OMR 315 NF	288.1 [11.34]	54.8 [2.16]	234.1 [9.22]	257.6 [10.14]
OMR 375 NF	298.3 [11.74]	65.0 [2.56]	244.3 [9.62]	267.8 [10.54]


C: Drain connection

7/16 - 20 UNF

D: 7/8-14 UNF, 0.66 in (15 mm) deep

E: M8; 0.51 in (13 mm) deep

F: Brake release connection 7/16 - 20 UNF

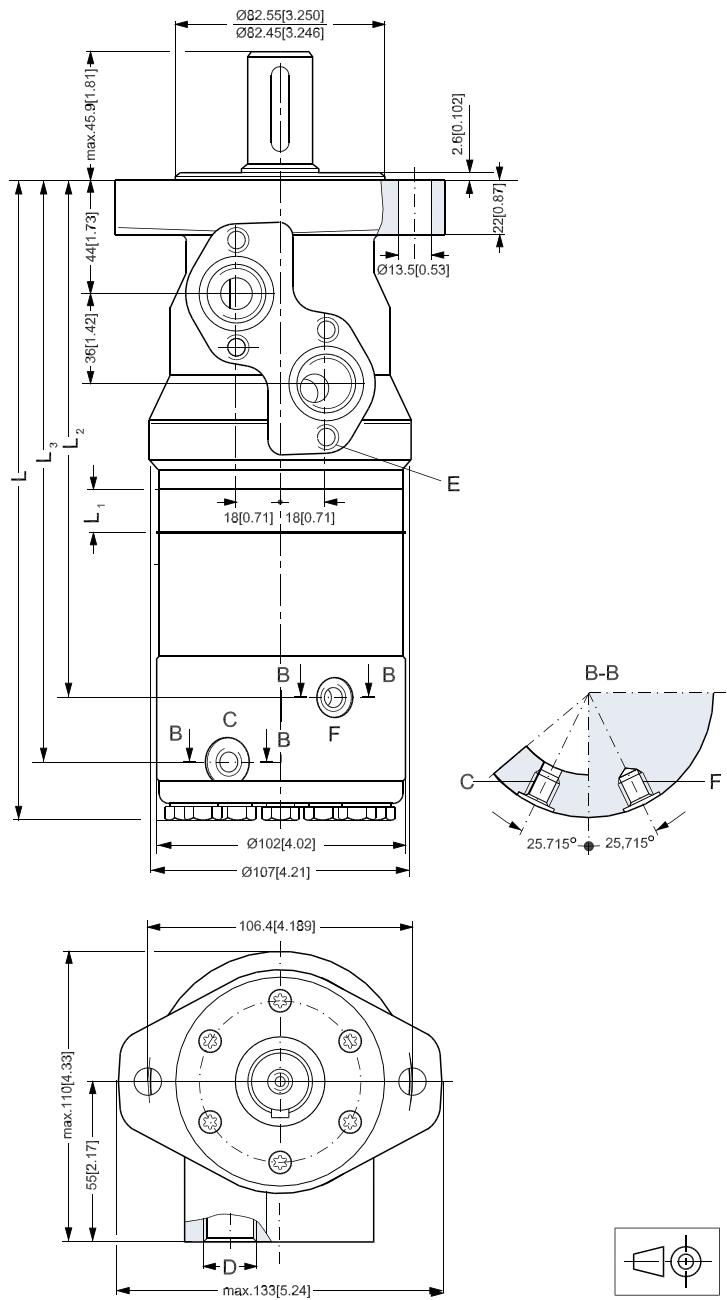

151-1719.11.22

Dimensions

OMRW NF motor

Type	Max. L mm [in]	L ₁ mm [in]
OMRW 80 NF	213.2 [8.39]	14.0 [0.55]
OMRW 100 NF	216.6 [8.53]	17.4 [0.69]
OMRW 125 NF	221.0 [8.70]	21.8 [0.86]
OMRW 160 NF	227.0 [8.94]	27.8 [1.09]
OMRW 200 NF	234.0 [9.21]	34.8 [1.37]
OMRW 250 NF	242.7 [9.56]	43.5 [1.71]
OMRW 315 NF	254.0 [10.0]	54.8 [2.16]
OMRW 375 NF	264.2 [10.40]	65.0 [2.56]

Type	Max. L ₂ mm [in]	L ₃ mm [in]
OMRW 80 NF	159.2 [6.27]	182.7 [7.19]
OMRW 100 NF	162.6 [6.40]	186.1 [7.50]
OMRW 125 NF	167.0 [6.57]	190.5 [7.50]
OMRW 160 NF	173.0 [6.81]	196.5 [7.74]
OMRW 200 NF	180.0 [7.09]	203.5 [8.01]
OMRW 250 NF	188.7 [7.43]	212.2 [8.35]
OMRW 315 NF	200.0 [7.87]	223.5 [8.80]
OMRW 375 NF	210.2 [8.28]	233.7 [9.20]


C: Drain connection

G 1/4; 12 mm [0.47 in] deep

D: G 1/2; 15 mm [0.59 in] deep

E: M8; 13 mm [0.51 in] deep

F: Brake release connection G 1/4

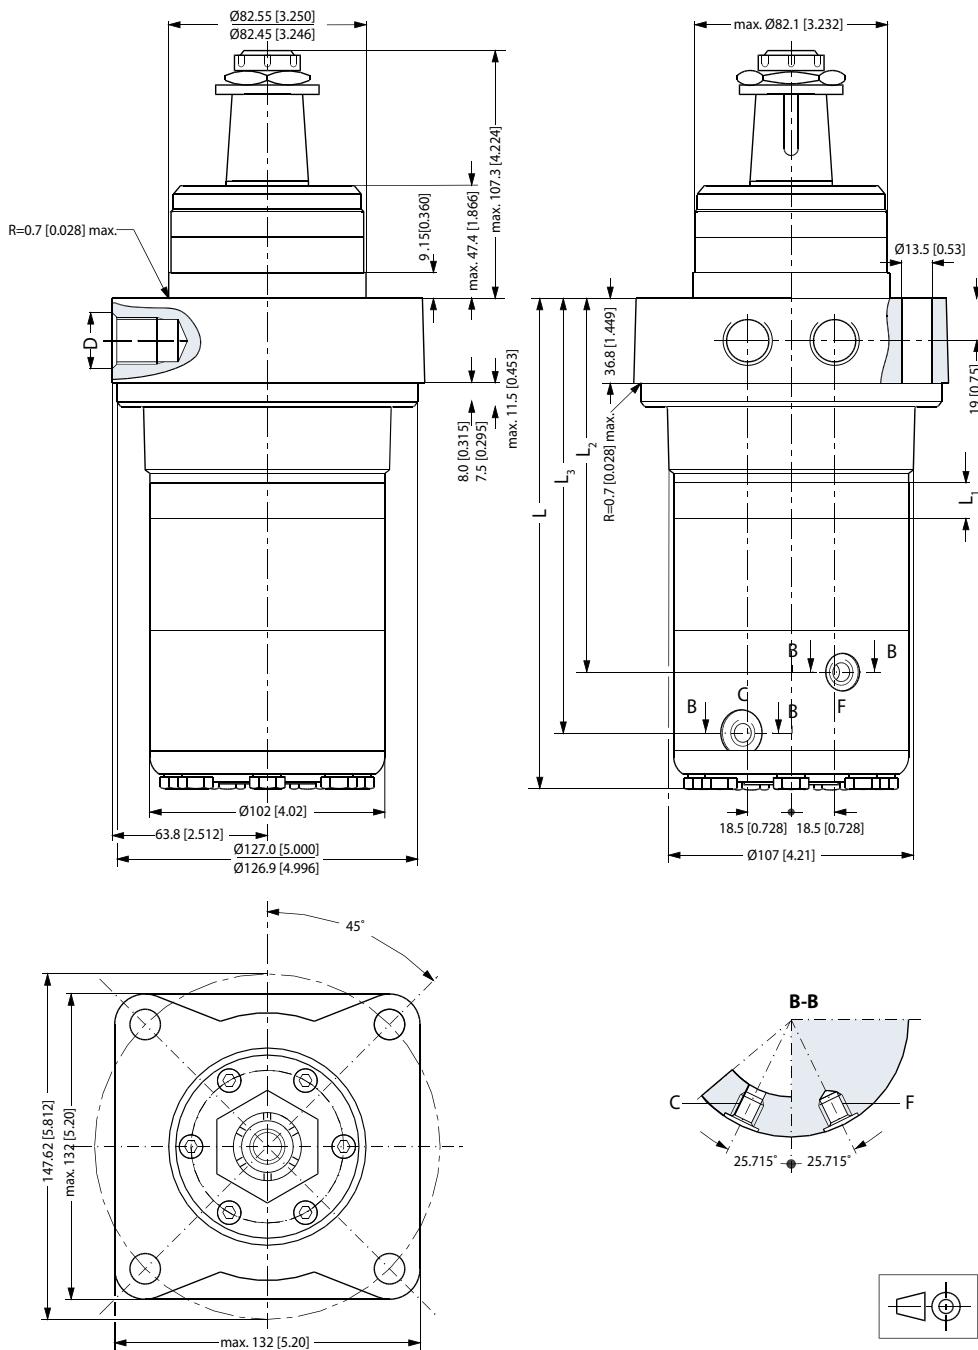

151-1793.11



OMR
Technical Information
Notes

Notes

Versions

Mounting flange	Spigot diameter (front / rear end)	Bolt circle diameter (BC)	Shaft	Port size	European version	US version	Side port version	End port version	Flange port version	Standard shaft seal	High pressure shaft seal	Drain connection	Checkvalve	Main type designation
4 hole oval flange (A4-flange)	\emptyset 82.5 mm [3.25 in]	\emptyset 106.4 mm [4.20 in]	Cyl. 32 mm	G 1/2	●		●			●		Yes	Yes	OMH
			Cyl. 35 mm	G 1/2	●		●			●		Yes	Yes	OMH
			Cyl. 1 1/4 in	7/8-14 UNF		●	●			●		Yes	Yes	OMH
			Splined 1in SAE 6B	7/8-14 UNF		●	●			●		Yes	Yes	OMH
			Splined 1 1/4 in	G 1/2	●		●			●		Yes	Yes	OMH
			Splined 1 1/4 in	7/8-14 UNF		●	●			●		Yes	Yes	OMH
			Tapered 35 mm	G 1/2	●		●			●		Yes	Yes	OMH

Functions diagram - see page: →



Code Numbers

Code numbers	Displacement [cm ³]					Technical data - Page	Dimensions - Page
	200	250	315	400	500		
151H	1002	1003	1004	1005	1006	79	91
151H	1012	1013	1014	1015	1016	80	91
151H	1042	1043	1044	1045	1046	79	92
151H	1080	1082	1083	1084	1081	78	92
151H	1022	1023	1024	1025	1026	80	91
151H	1052	1053	1054	1055	1056	80	92
151H	-	-	1034	1035	1036	80	91
→	84	84	85	85	86		

Ordering

Add the four digit prefix "151H" to the four digit numbers from the chart for complete code number.

Example:

151H1044 for an OMH 315 with A4 flange, cyl. 1 ¼ in shaft, port size 7/8 - 14 UNF

Orders will not be accepted without the four digit prefix.

Technical data for OMH with 1 in SAE 6 B splined shaft

Type		OMH	OMH	OMH	OMH	OMH
Motor size		200	250	315	400	500
Geometric displacement	cm ³ [inch]	201.3 [12.32]	252.0 [15.42]	314.9 [19.27]	396.8 [24.28]	470.6 [28.80]
Max. speed	min ⁻¹ [rpm]	cont. int. ¹⁾	370 445	295 350	235 285	185 225
Max. torque	N·m [lbf·in]	cont. int. ¹⁾ peak ²⁾	340 [3000] 510 [4500] 610 [5400]	340 [3000] 510 [4500] 610 [5400]	340 [3000] 540 [4800] 610 [5400]	340 [3000] 540 [4800] 610 [5400]
Max. output	kW [hp]	cont. int. ¹⁾	11.2 [15.0] 17.2 [23.0]	7.5 [10.0] 11.9 [16.0]	5.2 [7.0] 9.7 [13.0]	4.8 [6.5] 8.2 [11.0]
Max. pressure drop	bar [psi]	cont. int. ¹⁾ peak ²⁾	115 [1650] 170 [2500] 215 [3120]	90 [1300] 145 [2100] 175 [2540]	75 [1100] 120 [1750] 145 [2100]	60 [900] 95 [1400] 110 [1600]
Max. oil flow	l/min [US gal/min]	cont. int. ¹⁾	75 [19.8] 90 [23.8]	75 [19.8] 90 [23.8]	75 [19.8] 90 [23.8]	75 [19.8] 90 [23.8]
Max. starting pressure with unloaded shaft	bar [psi]		7 [100]	7 [100]	7 [100]	7 [100]
Min starting torque	at max. press drop cont. N·m [lbf·in]		255 [2250]	270 [2400]	280 [2500]	290 [2550]
	at max. press.drop int. ¹⁾ N·m [lbf·in]		390 [3450]	435 [3850]	450 [4000]	450 [4000]

¹⁾ Intermittent operation: the permissible values may occur for max. 10% of every minute.

²⁾ Peak load: the permissible values may occur for max. 1% of every minute.

Technical data for OMH with 32 mm and 1 1/4 in cylindrical shaft

Type		OMH	OMH	OMH	OMH	OMH
Motor size		200	250	315	400	500
Geometric displacement	cm ³ [inch]	201.3 [12.32]	252.0 [15.42]	314.9 [19.27]	396.8 [24.28]	470.6 [28.80]
Max. speed	min ⁻¹ [rpm]	cont. int ¹⁾	370 445	295 350	235 285	185 225
Max. torque	N·m [lbf·in]	cont. int. ¹⁾ peak ²⁾	510 [4500] 580 [5130] 640 [5660]	610 [5400] 700 [6200] 790 [6990]	590 [5220] 670 [5930] 840 [7440]	590 [5220] 700 [6200] 840 [7440]
Max. output	kW [hp]	cont. int. ¹⁾	16.0 [21.5] 18.5 [24.8]	16.0 [21.5] 18.5 [24.8]	12.5 [16.8] 14.0 [18.8]	10.0 [13.4] 12.0 [16.1]
Max. pressure drop	bar [psi]	cont. int ¹⁾ peak ²⁾	175 [2540] 200 [2900] 225 [3260]	175 [2540] 200 [2900] 225 [3260]	135 [1960] 155 [2250] 190 [2760]	105 [1520] 125 [1810] 155 [2250]
Max. oil flow	l/min [US gal/min]	cont. int. ¹⁾	75 [19.8] 90 [23.8]	75 [19.8] 90 [23.8]	75 [19.8] 90 [23.8]	75 [19.8] 90 [23.8]
Max. starting pressure with unloaded shaft	bar [psi]		7 [100]	7 [100]	7 [100]	7 [100]
Min starting torque	at max. press drop cont. N·m [lbf·in]		390 [3450]	520 [4600]	510 [4510]	490 [4340]
	at max. press.drop int. ¹⁾ N·m [lbf·in]		450 [3980]	590 [5220]	590 [5220]	600 [5310]
¹⁾ Intermittent operation: the permissible values may occur for max. 10% of every minute.						
²⁾ Peak load: the permissible values may occur for max. 1% of every minute.						

Technical data for OMH with 35 mm cylindrical, 1 1/4 in splined and 35 mm tapered shaft

Type		OMH	OMH	OMH	OMH	OMH
Motor size		200	250	315	400	500
Geometric displacement	cm ³ [inch]	201.3 [12.32]	252.0 [15.42]	314.9 [19.27]	396.8 [24.28]	470.6 [28.80]
Max. speed	min ⁻¹ [rpm]	cont. int ¹⁾	370 445	295 350	235 285	185 225
Max. torque	N·m [lbf·in]	cont. int. ¹⁾ peak ²⁾	510 [4500] 580 [5130] 640 [5660]	610 [5400] 700 [6200] 790 [6990]	740 [6550] 820 [7260] 980 [8670]	840 [7440] 980 [8670] 1090 [9650]
Max. output	kW [hp]	cont. int. ¹⁾	16.0 [21.5] 18.5 [24.8]	16.0 [21.5] 18.5 [24.8]	14.0 [18.8] 15.5 [20.8]	12.5 [16.8] 15.0 [20.1]
Max. pressure drop	bar [psi]	cont. int ¹⁾ peak ²⁾	175 [2540] 200 [2900] 225 [3260]	175 [2540] 200 [2900] 225 [3260]	175 [2540] 200 [2900] 225 [3260]	155 [2250] 190 [2760] 210 [3050]
Max. oil flow	l/min [US gal/min]	cont. int. ¹⁾	75 [19.8] 90 [23.8]	75 [19.8] 90 [23.8]	75 [19.8] 90 [23.8]	75 [19.8] 90 [23.8]
Max. starting pressure with unloaded shaft	bar [psi]		7 [100]	7 [100]	7 [100]	7 [100]
Min starting torque	at max. press drop cont. N·m [lbf·in]		390 [3450]	520 [4600]	660 [5840]	720 [6370]
	at max. press.drop int. ¹⁾ N·m [lbf·in]		450 [3980]	590 [5220]	730 [6460]	880 [7790]


Type			Max. inlet pressure	Max. return pressure with drain line
OMH 200 - 500	bar [psi]	cont	200 [2900]	175 [2540]
	bar [psi]	int. ¹⁾	225 [3260]	200 [2900]
	bar [psi]	peak ²⁾	250 [3630]	225 [3260]

¹⁾ Intermittent operation: the permissible values may occur for max. 10% of every minute.

²⁾ Peak load: the permissible values may occur for max. 1% of every minute.

Max. Permissible Shaft Seal Pressure


OMH with standard shaft seal, check valves and without use of drain connection:
 The pressure on the shaft seal never exceeds the pressure in the return line



151-320.10

OMH with standard shaft seal, check valves and with drain connection:
 The shaft seal pressure equals the pressure on the drain line.


Max. return pressure without drain line or max. pressure in the drain line

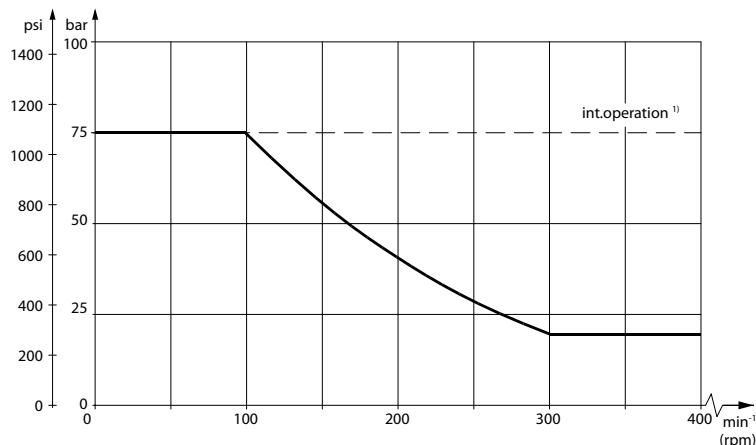

151-1565.10

¹⁾ Intermittent operation: the permissible values may occur for max. 10% of every minute.

Pressure Drop in Motor

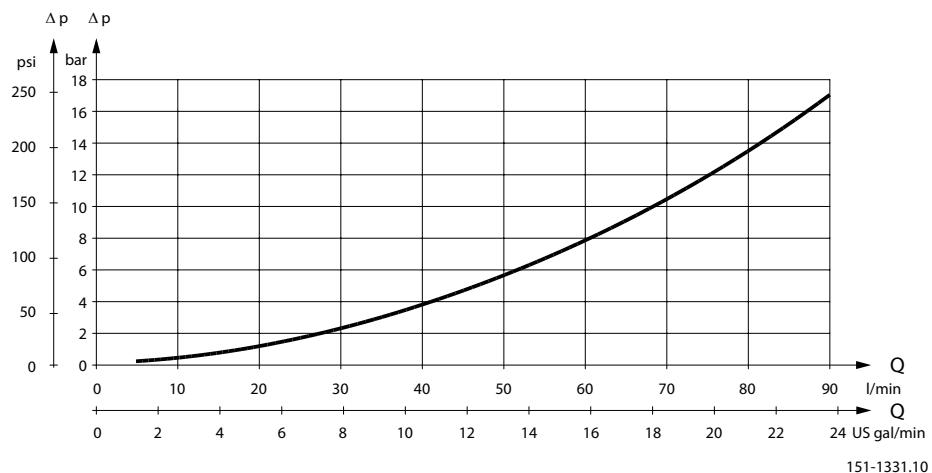


The curve applies to an unloaded motor shaft and an oil viscosity of 35 mm²/s [165 SUS]

Oil Flow in Drain Line

The table shows the max. oil flow in the drain line at a return pressure less than 5-10 bar [75-150 psi].

Pressure drop bar [psi]	Viscosity mm ² /s [SUS]	Oil flow in drain line l/min [US gal/min]
100 [1450]	20 [100]	2.5 [0.66]
	35 [165]	1.8 [0.78]
140 [2030]	20 [100]	3.5 [0.93]
	35 [165]	2.8 [0.74]

Direction of Shaft Rotation

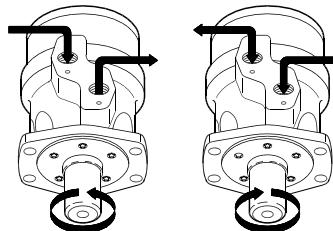

151-2107.10



**Permissible Shaft Loads
for OMH**

The permissible shaft load ($P_{rad.}$) is calculated from the speed (n) and the distance (l) between the point of load application and the mounting flange.

$$P_{rad.} = \frac{1100}{n} \cdot \frac{250000}{103.5 + l} \quad N^*, l \text{ in mm}$$

$$P_{rad.} = \frac{1100}{n} \cdot \frac{2215}{4.07 + l} \quad lbf^*, l \text{ in inch}$$

* $n \geq 200 \text{ min}^{-1}$ (rpm); $l \leq 60 \text{ mm}$ [2.36 in]
 $n < 200 \text{ min}^{-1}$ (rpm); $\Rightarrow P_{Rmax} = 11000 \text{ N}$ [2475 lbf]

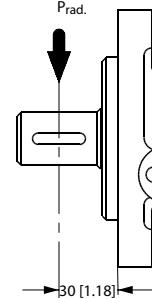
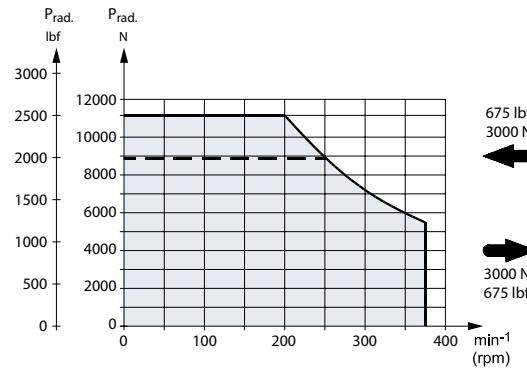


151-1474.10

----- 1 in SAE 6B splined shaft

The drawing shows the permissible radial load when $l = 30 \text{ mm}$ [1.18 in].

Function Diagrams

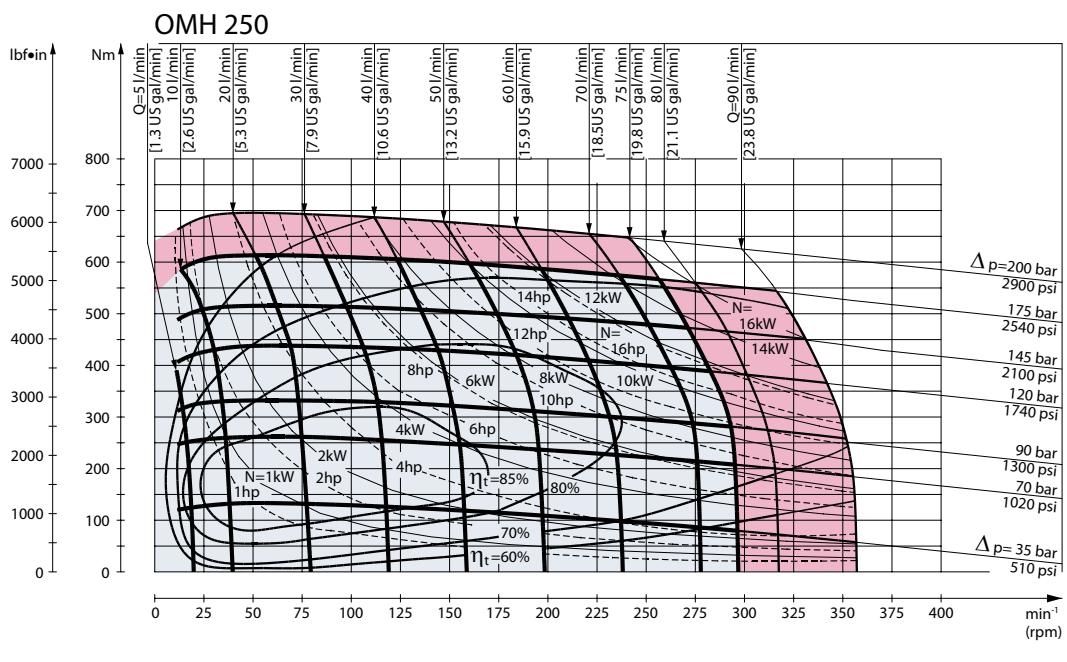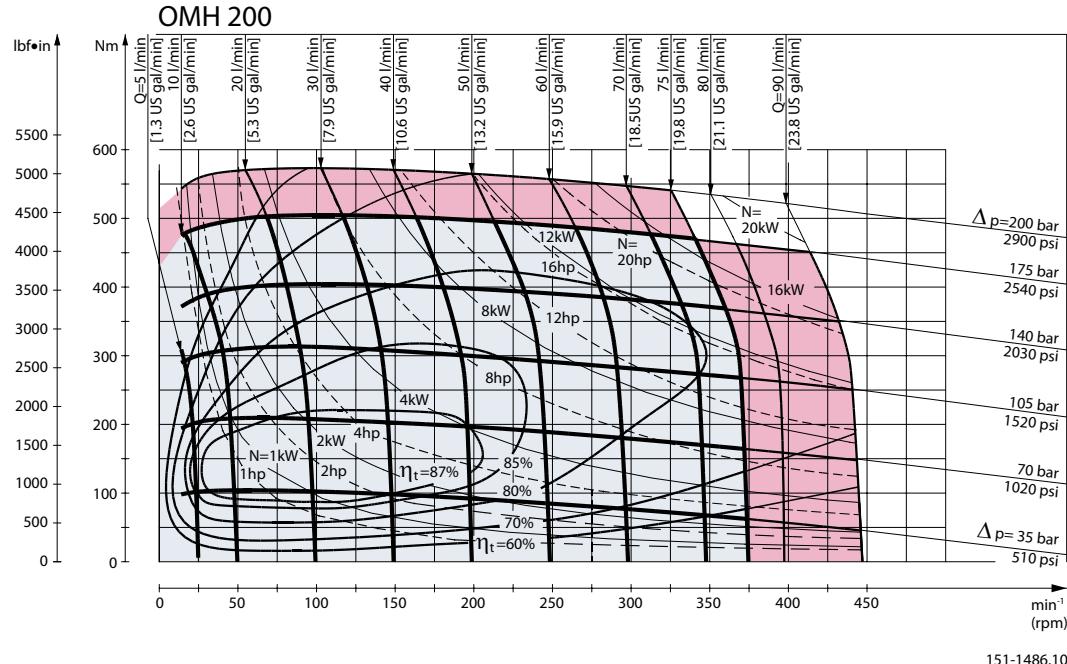

Explanation of function diagram use, basis and conditions can be found on page 7.



■ Continuous range

■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/interruption pressure drop for the actual shaft version can be found on page 78 - 80.

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

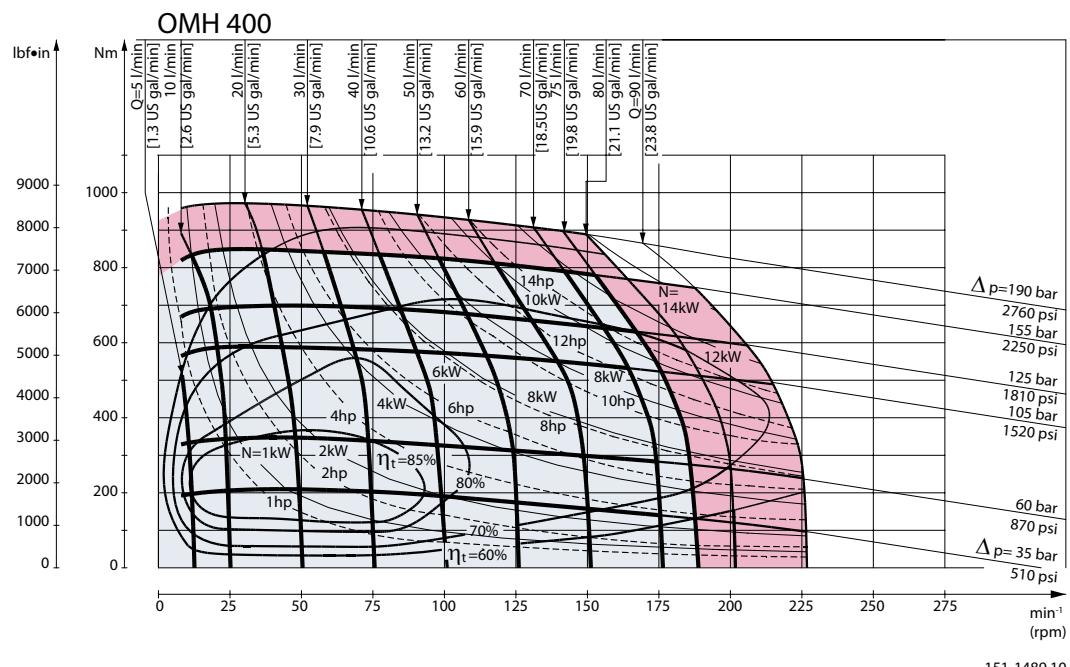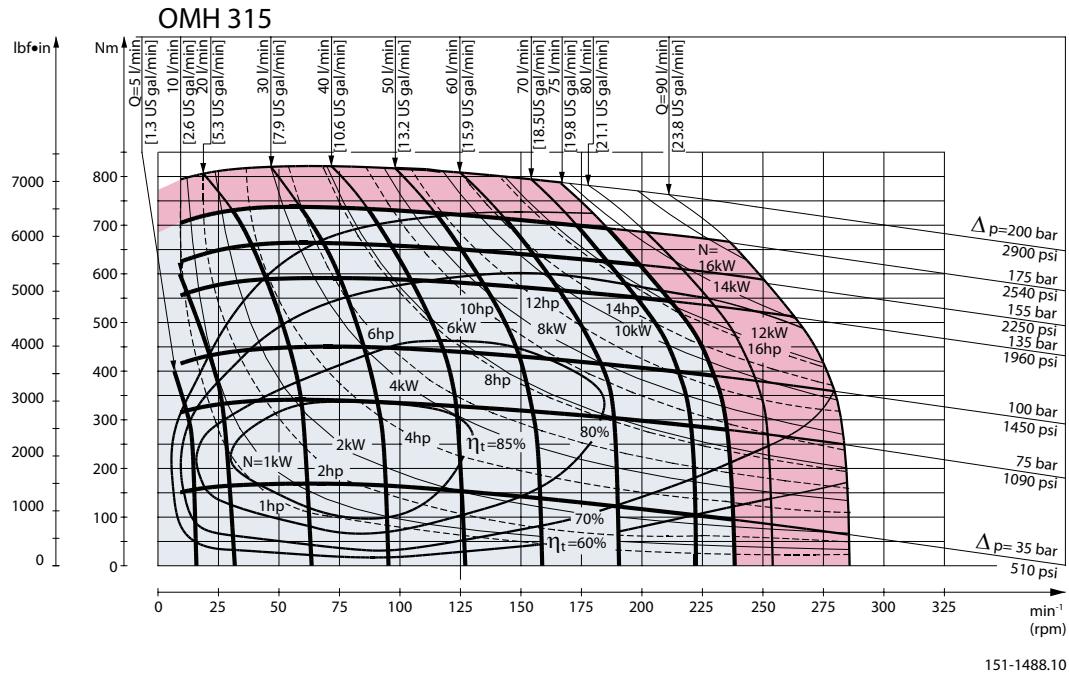


Explanation of function diagram use, basis and conditions can be found on page 7.

■ Continuous range

■ Intermittent range (max. 10% operation every minute)
Max. permissible continuous/intermittent pressure drop for the actual shaft version can be found on page 78 - 80.

Intermittent pressure drop and oil flow must not occur simultaneously.

Function Diagrams

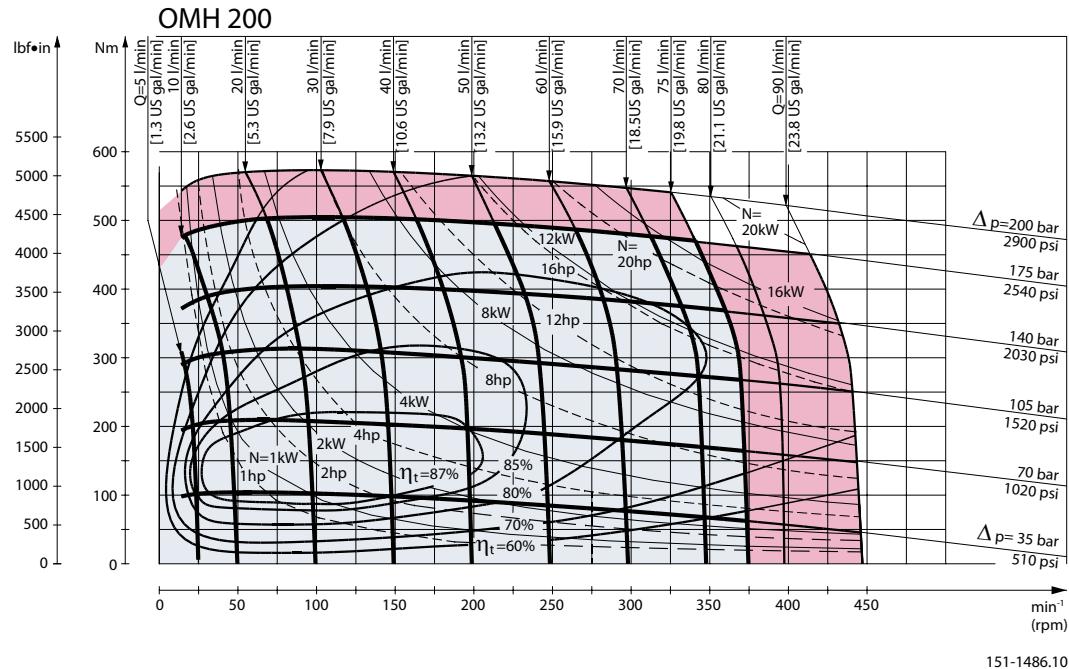

Explanation of function diagram use, basis and conditions can be found on page 7.

■ Continuous range



■ Intermittent range (max. 10% operation every minute)

Max. permissible continuous/intermittent pressure drop for the actual shaft version can be found on page 78 - 80.



Intermittent pressure drop and oil flow must not occur simultaneously.

Shaft Version



- A: Cylindrical shaft 32 mm
 D: Parallel key
 A10 × 8 × 45
 DIN 6885

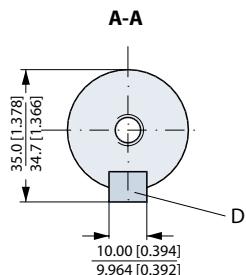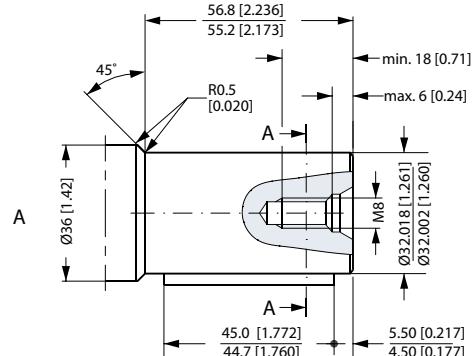

- B: Cylindrical shaft 35 mm
 E: Parallel key
 A10 × 8 × 45
 DIN 6885

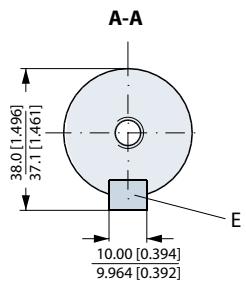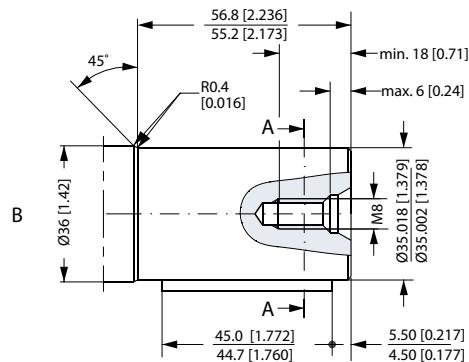


- US version**
 C: Cylindrical shaft 1 1/4 in
 F: Parallel key
 ${}^5/16 \times {}^5/16 \times 1\frac{1}{4}$ in
 SAE J 744

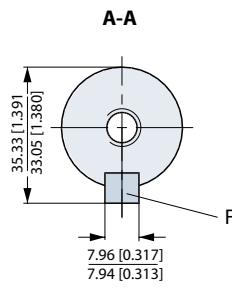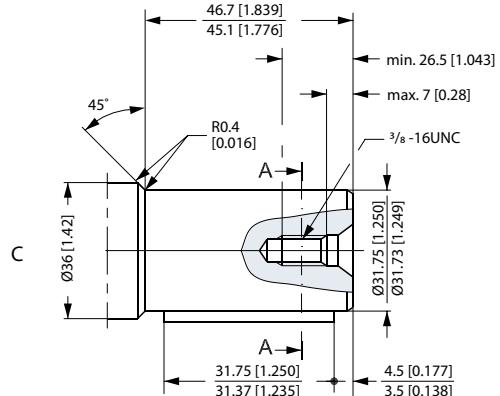


Shaft Version

D: Splined shaft
SAE 6 B (B.S. 2059)
Straight-sided,
bottom fitting, deep.
Fit 2
Nom. size 1 in

*Deviates from
SAE 6 B (B.S. 2059)

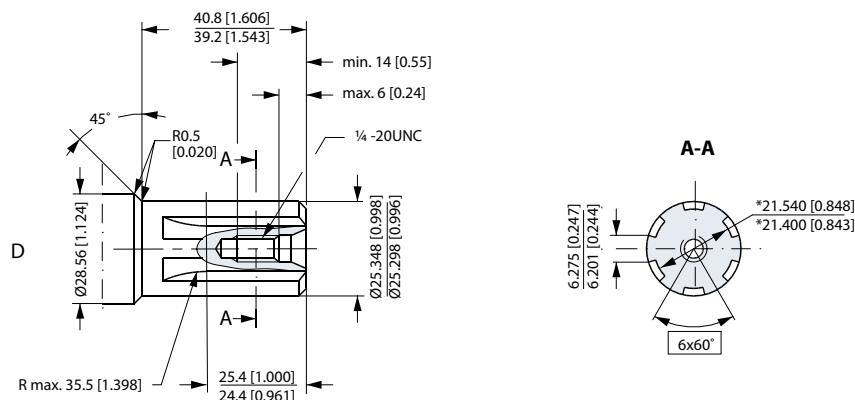

E. Involute splined shaft
ANS B92.1 - 1980 standard
Flat root side fit
Pitch 12/24
Teeth 14
Major dia. 1.25 in
Pressure angle 30°

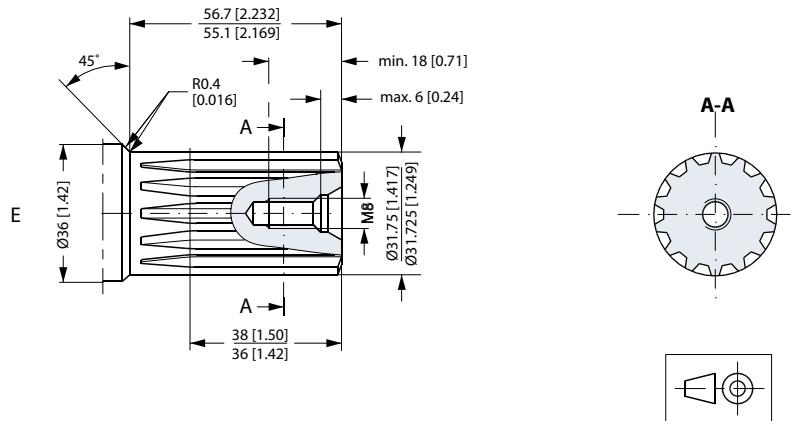


151-1853.11

Shaft Version

US version

- F. Involute splined shaft
ANS B92.1 - 1970 standard
Flat root side fit
Pitch 12/24
Teeth 14
Major dia. 1.25 in
Pressure angle 30°

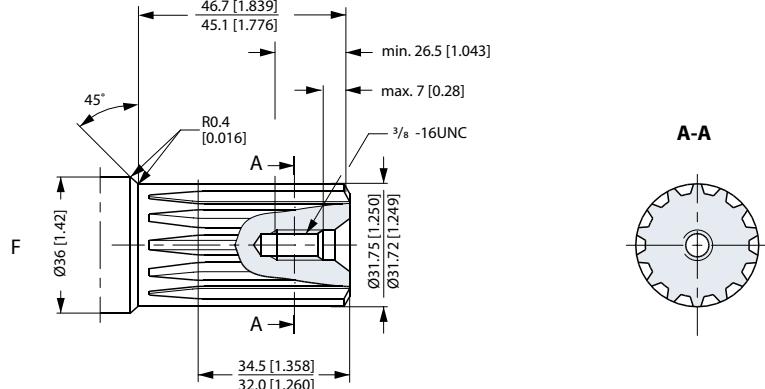

G: Tapered shaft 35 mm

I: DIN 937

NV 41

Tightening torque:


$200 \pm 10 \text{ Nm}$ [$1770 \pm 85 \text{ lbf-in}$]

H: Taper 1:10

L: Parallel key


B6 • 6 • 20

DIN 6885

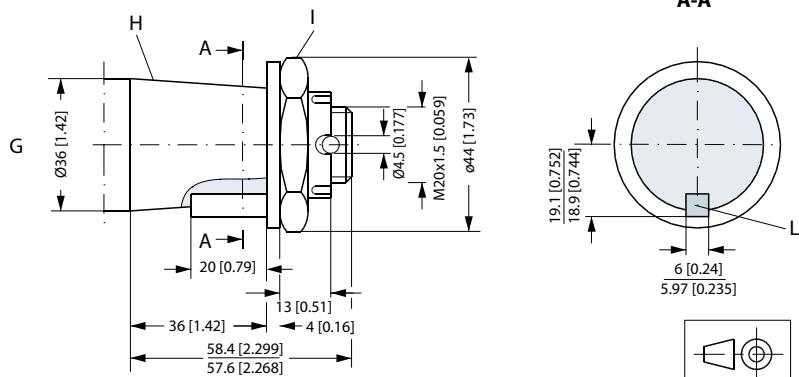


151-1854.11

Port Thread Versions

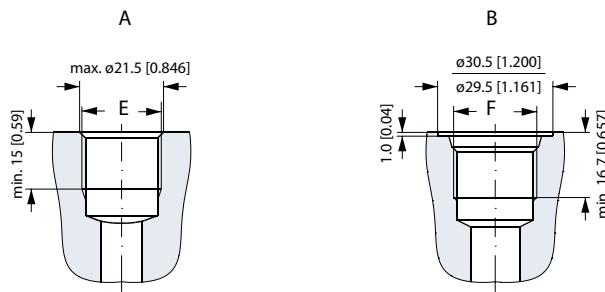

A: G main ports
E: ISO 228/1 - G $\frac{1}{2}$
B: UNF main ports
F: $\frac{7}{8}$ - 14 UNF
O-ring boss port

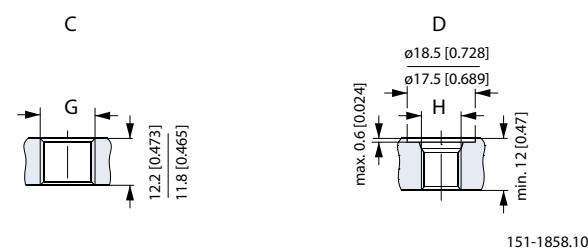


C: G drain port
G: ISO 228/1 - G $\frac{1}{4}$
D: UNF drain port
H: $\frac{7}{16}$ - 20 UNF
O-ring boss port

151-1858.10

Manifold Mount

European version

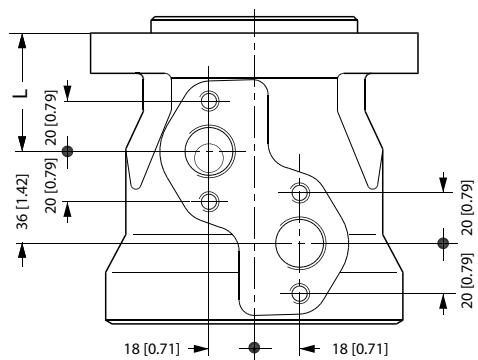

L: see dimensional drawing for given OMH motor on pages 91 - 92

151-2135.10

Dimensions


Side port version with 4 hole oval mounting flange (A4-flange).

Type	Max. L mm [in]	L ₁ mm [in]
OMH 200	171.1 [6.74]	27.8 [1.09]
OMH 250	178.1 [7.01]	34.8 [1.37]
OMH 315	186.8 [7.35]	43.5 [1.71]
OMH 400	198.1 [7.80]	54.8 [2.16]
OMH 500	208.3 [8.20]	65.0 [2.56]

C: Drain connection

G ¼; 12 mm [0.47 in] deep

D: G ½; 15 mm [0.59 in] deep

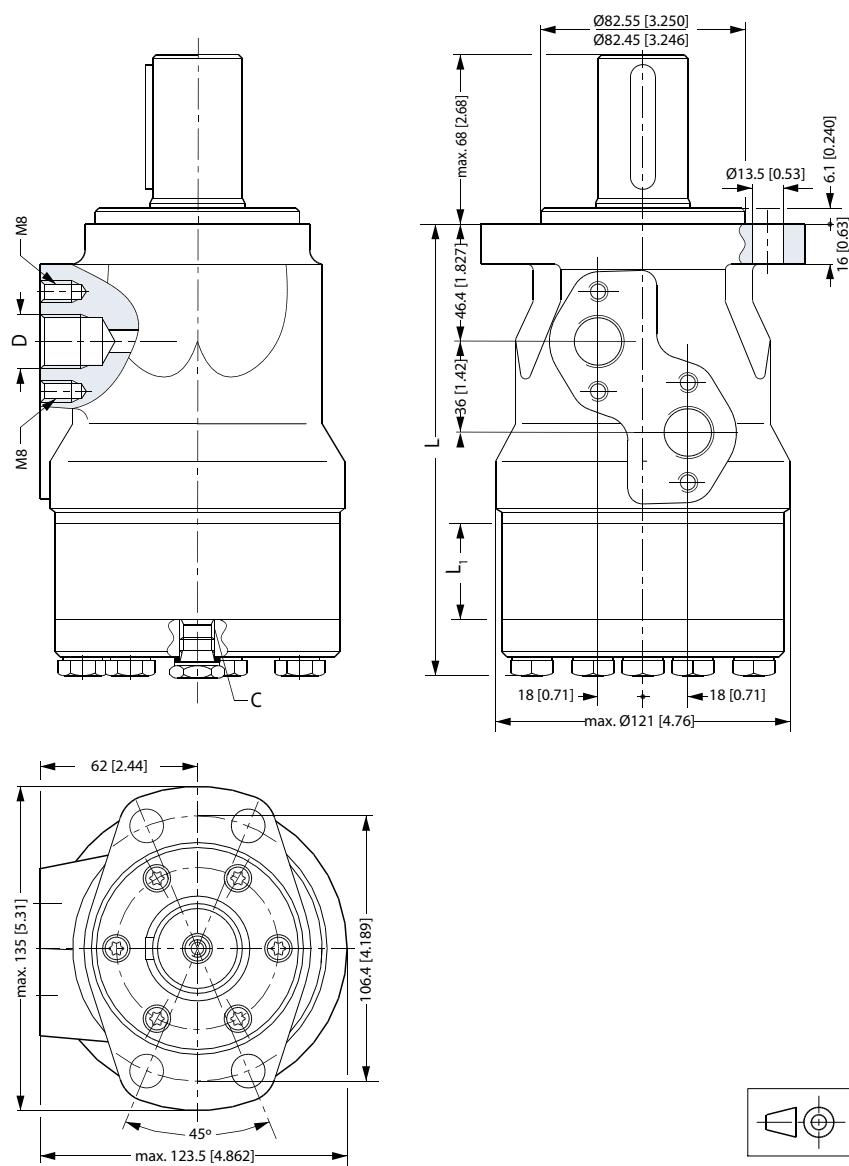

151-1324.11


Dimensions

Side port version with 4 hole oval mounting flange (A4 flange).

Output shaft.max.	mm L ₂ [in]
Splined shaft 1 in	50.5 [1.99]
Other shaft versions	58.0 [2.28]

Type	Max. L mm [in]	L ₁ mm [in]
OMH 200	171.1 [6.74]	27.8 [1.09]
OMH 250	178.1 [7.01]	34.8 [1.37]
OMH 315	186.8 [7.35]	43.5 [1.71]
OMH 400	198.1 [7.80]	54.8 [2.16]
OMH 500	208.3 [8.20]	65.0 [2.56]

- C: Drain connection
7/16 - 20 UNF;
12 mm [0.47 in] deep
D: 7/8 - 14 UNF;
15 mm [0.59 in] deep

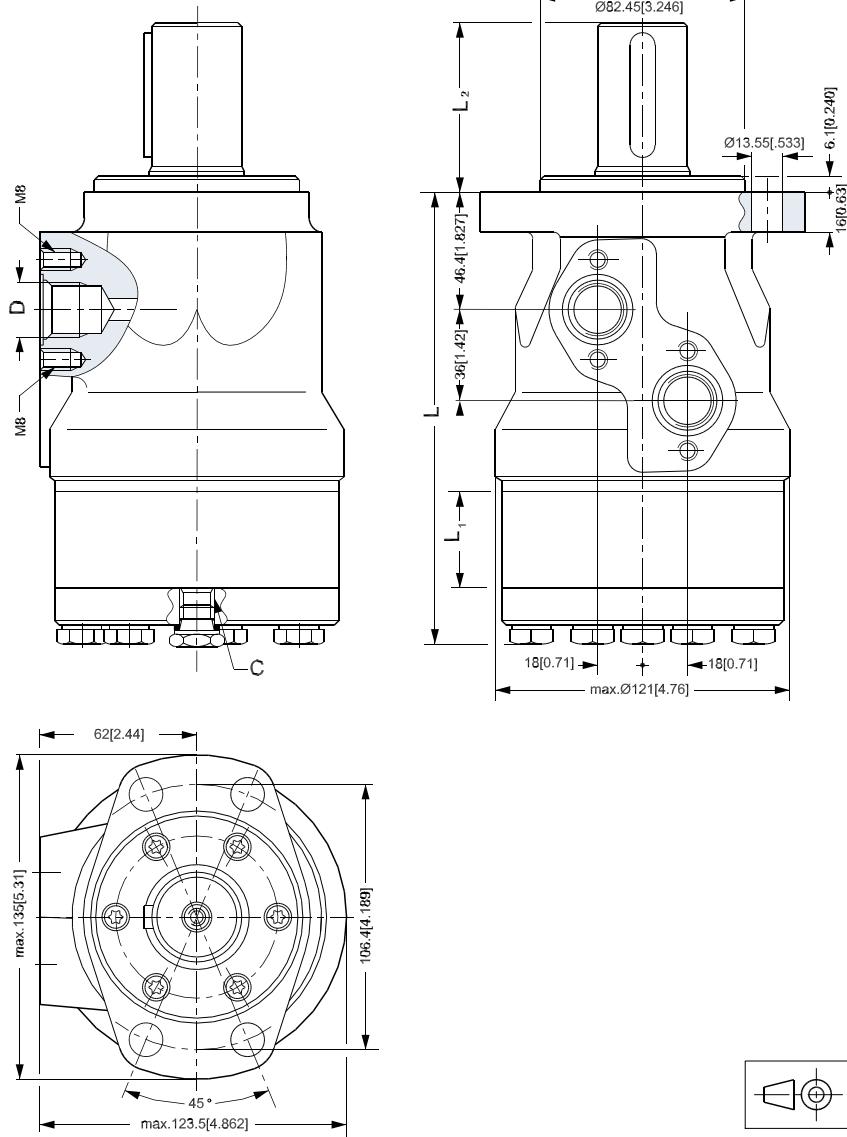

151-1324.11.22

Weight of Motors

Code no	Weight kg	Weight [lb]	Code no	Weight kg	Weight [lb]	Code no	Weight kg	Weight [lb]
151-0208	7.2	[15.9]	151-0405	8.0	[17.6]	151-0637	6.9	[15.2]
151-0242	6.9	[15.2]	151-0406	8.5	[18.7]	151-0638	7.4	[16.3]
151-0243	7.0	[15.4]	151-0407	9.0	[19.8]	151-0640	5.5	[12.1]
151-0244	7.5	[16.5]	151-0408	9.5	[20.9]	151-0641	5.5	[12.1]
151-0245	8.0	[17.6]	151-0410	6.7	[14.8]	151-0642	5.6	[12.3]
151-0246	9.0	[19.8]	151-0411	6.9	[15.2]	151-0646	5.9	[13.0]
151-0247	8.5	[18.7]	151-0412	7.0	[15.4]	151-0700	6.7	[14.8]
151-0248	6.7	[14.8]	151-0413	7.2	[15.9]	151-0701	6.9	[15.2]
151-0265	6.7	[14.8]	151-0414	7.5	[16.5]	151-0702	7.0	[15.4]
151-0266	6.9	[15.2]	151-0415	8.0	[17.6]	151-0703	7.2	[15.9]
151-0267	7.0	[15.4]	151-0416	8.5	[18.7]	151-0704	7.5	[16.5]
151-0268	7.5	[16.5]	151-0417	9.0	[19.8]	151-0705	8.0	[17.6]
151-0269	8.0	[17.6]	151-0418	9.5	[20.9]	151-0706	8.5	[18.7]
151-0270	9.0	[19.8]	151-0420	6.7	[14.8]	151-0707	9.0	[19.8]
151-0271	8.5	[18.7]	151-0421	6.9	[15.2]	151-0708	9.5	[20.9]
151-0300	5.6	[12.3]	151-0422	7.0	[15.4]	151-0710	6.7	[14.8]
151-0301	5.7	[12.6]	151-0423	7.2	[15.9]	151-0711	6.9	[15.2]
151-0302	5.9	[13.0]	151-0424	7.5	[16.5]	151-0712	7.0	[15.4]
151-0303	6.0	[13.2]	151-0425	8.0	[17.6]	151-0713	7.2	[15.9]
151-0304	6.2	[13.7]	151-0426	8.5	[18.7]	151-0714	7.5	[16.5]
151-0305	6.4	[14.1]	151-0427	9.0	[19.8]	151-0715	8.0	[17.6]
151-0306	6.6	[14.6]	151-0428	9.5	[20.9]	151-0716	8.5	[18.7]
151-0307	6.9	[15.2]	151-0600	5.6	[12.3]	151-0717	9.0	[19.8]
151-0308	7.4	[16.3]	151-0601	5.7	[12.6]	151-0718	9.5	[20.9]
151-0310	5.6	[12.3]	151-0602	5.9	[13.0]	151-0720	6.7	[14.8]
151-0311	5.7	[12.6]	151-0603	6.0	[13.2]	151-0721	6.9	[15.2]
151-0312	5.9	[13.0]	151-0604	6.2	[13.7]	151-0722	7.0	[15.4]
151-0313	6.0	[13.2]	151-0605	6.4	[14.1]	151-0723	7.2	[15.9]
151-0314	6.2	[13.7]	151-0606	6.6	[14.6]	151-0724	7.5	[16.5]
151-0315	6.4	[14.1]	151-0607	6.9	[15.2]	151-0725	8.0	[17.6]
151-0316	6.6	[14.6]	151-0608	7.4	[16.3]	151-0726	8.5	[18.7]
151-0317	6.9	[15.2]	151-0610	5.6	[12.3]	151-0727	9.0	[19.8]
151-0318	7.4	[16.3]	151-0611	5.7	[12.6]	151-0728	9.5	[20.9]
151-0319	5.6	[12.3]	151-0612	5.9	[13.0]	151-1208	5.6	[12.3]
151-0330	5.6	[12.3]	151-0613	6.0	[13.2]	151-1209	5.7	[12.6]
151-0331	5.7	[12.6]	151-0614	6.2	[13.7]	151-1210	5.9	[13.0]
151-0332	5.9	[13.0]	151-0615	6.4	[14.1]	151-1211	6.2	[13.7]
151-0333	6.0	[13.2]	151-0616	6.6	[14.6]	151-1212	6.4	[14.1]
151-0334	6.2	[13.7]	151-0617	6.9	[15.2]	151-1213	6.6	[14.6]
151-0335	6.4	[14.1]	151-0618	7.4	[16.3]	151-1214	6.9	[15.2]
151-0336	6.6	[14.6]	151-0622	5.9	[13.0]	151-1215	7.4	[16.3]
151-0337	6.9	[15.2]	151-0624	6.2	[13.7]	151-1217	6.0	[13.2]
151-0338	7.4	[16.3]	151-0625	6.4	[14.1]	151-1231	6.7	[14.8]
151-0340	5.5	[12.1]	151-0627	6.9	[15.2]	151-1232	6.9	[15.2]
151-0341	5.5	[12.1]	151-0630	5.6	[12.3]	151-1233	7.0	[15.4]
151-0342	5.6	[12.3]	151-0631	5.7	[12.6]	151-1234	7.5	[16.5]
151-0400	6.7	[14.8]	151-0632	5.9	[13.0]	151-1235	8.0	[17.6]
151-0401	6.9	[15.2]	151-0633	6.0	[13.2]	151-1236	8.5	[18.7]
151-0402	7.0	[15.4]	151-0634	6.2	[13.7]	151-1237	9.0	[19.8]
151-0403	7.2	[15.9]	151-0635	6.4	[14.1]	151-1238	7.2	[15.9]
151-0404	7.5	[16.5]	151-0636	6.6	[14.6]	151-1243	9.5	[20.9]

Weight of Motors

Code no	Weight	
	kg	[lb]
151-5001	5.6	[12.3]
151-5002	5.7	[12.6]
151-5003	5.9	[13.0]
151-5004	6.0	[13.2]
151-5005	6.2	[13.7]
151-5006	6.4	[14.1]
151-5007	6.6	[14.6]
151-5008	6.9	[15.2]
151-5009	7.4	[16.3]
151-5010	5.4	[11.9]
151-5174	5.4	[11.9]
151-5191	6.1	[13.4]
151-5192	6.2	[13.7]
151-5193	6.4	[14.1]
151-5194	6.5	[14.3]
151-5195	6.7	[14.8]
151-5196	6.9	[15.2]
151-5197	7.1	[15.7]
151-5198	7.4	[16.3]
151-5199	7.9	[17.4]
151-5211	5.5	[12.1]
151-5212	5.6	[12.3]
151-5213	5.8	[12.8]
151-5214	5.9	[13.0]
151-5215	6.1	[13.4]
151-5216	6.3	[13.9]
151-5217	6.5	[14.3]
151-5218	6.8	[15.0]
151-5219	7.3	[16.1]
151-5301	5.5	[12.1]
151-5302	5.6	[12.3]
151-5303	5.8	[12.8]
151-5304	5.9	[13.0]
151-5305	6.1	[13.4]
151-5306	6.3	[13.9]
151-5307	6.5	[14.3]
151-5308	6.8	[15.0]
151-5309	7.3	[16.1]
151-5311	5.6	[12.3]
151-5312	5.7	[12.6]
151-5313	5.9	[13.0]
151-5315	6.2	[13.7]
151-5316	6.4	[14.1]
151-5318	6.9	[15.2]
151-6000	6.7	[14.8]
151-6001	6.9	[15.2]
151-6002	7.0	[15.4]
151-6003	7.2	[15.9]
151-6004	7.5	[16.5]
151-6005	8.0	[17.6]
151-6006	8.5	[18.7]
151-6007	9.0	[19.8]
151-6008	9.5	[20.9]
151-6010	6.7	[14.8]
151-6011	6.9	[15.2]
151-6012	7.0	[15.4]
151-6013	7.2	[15.9]
151-6014	7.5	[16.5]
151-6015	8.0	[17.6]
151-6016	8.5	[18.7]
151-6017	9.0	[19.8]
151-6018	9.5	[20.9]
151-6110	6.7	[14.8]
151-6111	6.9	[15.2]
151-6112	7.0	[15.4]
151-6113	7.2	[15.9]
151-6114	7.5	[16.5]
151-6115	8.0	[17.6]
151-6116	8.5	[18.7]
151-6117	9.0	[19.8]
151-6118	9.5	[20.9]
151-6190	7.3	[16.1]
151-6191	7.5	[16.5]
151-6192	7.6	[16.8]
151-6193	7.8	[17.2]
151-6194	8.1	[17.9]
151-6195	8.6	[19.0]
151-6196	9.1	[20.1]
151-6197	9.6	[21.2]
151-6198	10.1	[22.3]
151-6210	6.7	[14.8]
151-6211	6.9	[15.2]
151-6212	7.0	[15.4]
151-6213	7.2	[15.9]
151-6214	7.5	[16.5]
151-6215	8.0	[17.6]
151-6216	8.5	[18.7]
151-6217	9.0	[19.8]
151-6218	9.5	[20.9]
151-6294	9.5	[20.9]
151-6295	7.2	[15.9]
151-6296	9.5	[20.9]
151-6300	9.0	[19.8]
151-6301	9.4	[20.7]
151-6302	9.5	[20.9]
151-6303	9.7	[21.4]
151-6304	10.0	[22.1]
151-6305	10.5	[23.1]
151-6306	11.0	[24.3]
151-6307	11.5	[25.4]
151-6308	12.0	[26.5]
151-6380	6.7	[14.8]
151-6381	6.9	[15.2]
151-6383	7.2	[15.9]
151-6384	7.5	[16.5]
151-6385	8.0	[17.6]
151-6386	8.5	[18.7]
151-6387	9.0	[19.8]
151-6388	9.5	[20.9]
151-6430	9.0	[19.8]
151-6431	9.4	[20.7]
151-6432	9.5	[20.9]
151-6433	9.7	[21.4]
151-6434	10.0	[22.1]
151-6435	10.5	[23.1]
151-6436	11.0	[24.3]
151-6437	11.5	[25.4]
151-6438	12.0	[26.5]
151-6442	14.5	[32.0]
151-6443	14.7	[32.4]
151-6444	15.0	[33.1]
151-6445	15.5	[34.2]
151-6461	11.5	[25.4]
151-6462	12.0	[26.5]
151-6463	12.0	[26.5]
151-6464	12.5	[27.6]
151-6465	12.5	[27.6]
151-6466	13.0	[28.7]
151-6467	13.5	[29.8]
151-6468	14.0	[30.9]
151-6471	11.5	[25.4]
151-6472	12.0	[26.5]
151-6473	12.0	[26.5]
151-6474	12.5	[27.6]
151-6475	12.5	[27.6]
151-6476	13.0	[28.7]
151-6477	13.5	[29.8]
151-6478	14.0	[30.9]
151-7021	5.0	[11.0]
151-7022	5.1	[11.2]
151-7023	5.3	[11.7]
151-7024	5.4	[11.9]
151-7025	5.6	[12.3]
151-7026	5.8	[12.8]
151-7027	6.0	[13.2]
151-7028	6.3	[13.9]
151-7029	6.8	[15.0]
151-7041	5.6	[12.3]
151-7042	5.7	[12.6]
151-7043	5.9	[13.0]
151-7044	5.4	[11.9]
151-7045	6.2	[13.7]
151-7046	6.4	[14.1]

Weight of Motors

Code no	Weight	
	kg	[lb]
151-7047	6.6	[14.6]
151-7048	6.9	[15.2]
151-7049	7.4	[16.3]
151-7061	5.0	[11.0]
151-7062	5.1	[11.2]
151-7063	5.3	[11.7]
151-7065	5.6	[12.3]
151-7066	5.8	[12.8]
151-7067	6.0	[13.2]
151-7068	6.3	[13.9]
151-7069	6.8	[15.0]
151-7080	5.4	[12.0]
151-7081	5.4	[12.0]
151-7082	5.6	[12.3]
151-7101	5.5	[12.1]
151-7102	5.6	[12.3]
151-7103	5.8	[12.8]
151-7104	5.9	[13.0]
151-7105	6.1	[13.4]
151-7106	6.3	[13.9]
151-7107	6.5	[14.3]
151-7108	6.8	[15.0]
151-7109	7.3	[16.1]
151-7240	6.7	[14.8]
151-7241	6.9	[15.2]
151-7242	7.0	[15.4]
151-7243	7.2	[15.9]
151-7244	7.5	[16.5]
151-7245	8.0	[17.6]
151-7246	8.5	[18.7]
151-7247	9.0	[19.8]
151-7248	9.5	[20.9]
151-7250	6.7	[14.8]
151-7251	6.9	[15.2]
151-7252	7.0	[15.4]
151-7253	7.2	[15.9]
151-7254	7.5	[16.5]
151-7255	8.0	[17.6]
151-7256	8.5	[18.7]
151-7257	9.0	[19.8]
151-7258	9.5	[20.9]
151-7260	6.1	[13.4]
151-7261	6.3	[13.9]
151-7262	6.4	[14.1]
151-7263	6.6	[14.6]
151-7264	6.9	[15.2]
151-7265	7.4	[16.3]
151-7266	7.9	[17.4]
151-7267	8.4	[18.5]
151-7269	8.9	[19.6]
151H1002	10.5	[23.1]
151H1003	11.0	[24.3]
151H1004	11.5	[25.4]
151H1005	12.3	[27.1]
151H1006	13.0	[28.7]
151H1012	10.5	[23.1]
151H1013	11.0	[24.3]
151H1014	11.5	[25.4]
151H1015	12.3	[27.1]
151H1016	13.0	[28.7]
151H1022	10.5	[23.1]
151H1023	11.0	[24.3]
151H1024	11.5	[25.4]
151H1025	12.3	[27.1]
151H1026	13.0	[28.7]
151H1034	11.5	[25.4]
151H1035	12.3	[27.1]
151H1036	13.0	[28.7]
151H1042	10.5	[23.1]
151H1043	11.0	[24.3]
151H1044	11.5	[25.4]
151H1045	12.3	[27.1]
151H1046	13.0	[28.7]
151H1052	10.5	[23.1]
151H1053	11.0	[24.3]
151H1054	11.5	[25.4]
151H1055	12.3	[27.1]
151H1056	13.0	[28.7]
151H1080	10.5	[23.1]
151H1081	13.0	[28.7]
151H1082	11.0	[24.3]
151H1083	11.5	[25.4]
151H1084	12.3	[27.1]



Products we offer:

- Bent Axis Motors
- Closed Circuit Axial Piston Pumps and Motors
- Displays
- Electrohydraulic Power Steering
- Electrohydraulics
- Hydraulic Power Steering
- Integrated Systems
- Joysticks and Control Handles
- Microcontrollers and Software
- Open Circuit Axial Piston Pumps
- Orbital Motors
- PLUS+1™ GUIDE
- Proportional Valves
- Sensors
- Steering
- Transit Mixer Drives

Sauer-Danfoss is a global manufacturer and supplier of high-quality hydraulic and electronic components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market. Building on our extensive applications expertise, we work closely with our customers to ensure exceptional performance for a broad range of off-highway vehicles.

We help OEMs around the world speed up system development, reduce costs and bring vehicles to market faster.
Sauer-Danfoss – Your Strongest Partner in Mobile Hydraulics.

Go to www.sauer-danfoss.com for further product information.

Wherever off-highway vehicles are at work, so is Sauer-Danfoss.

We offer expert worldwide support for our customers, ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide comprehensive global service for all of our components.

Please contact the Sauer-Danfoss representative nearest you.

Members of the Sauer-Danfoss Group:

Comatrol

www.comatrol.com

Schwarzmueller-Inverter

www.schwarzmueller-inverter.com

Turolla

www.turollaocg.com

Valmova

www.valmova.com

Hydro-Gear

www.hydro-gear.com

Sauer-Danfoss-Daikin

www.sauer-danfoss-daikin.com

Local address:

Sauer-Danfoss (US) Company
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000
Fax: +1 515 239 6618

Sauer-Danfoss ApS
DK-6430 Nordborg, Denmark
Phone: +45 7488 4444
Fax: +45 7488 4400

Sauer-Danfoss GmbH & Co. OHG
Postfach 2460, D-24531 Neumünster
Krokamp 35, D-24539 Neumünster, Germany
Phone: +49 4321 871 0
Fax: +49 4321 871 122

Sauer-Danfoss-Daikin LTD.
Shin-Osaka TERASAKI 3rd Bldg. 6F
1-5-28 Nishimiyahara, Yodogawa-ku
Osaka 532-0004, Japan
Phone: +81 6 6395 6066
Fax: +81 6 6395 8585

www.sauer-danfoss.com