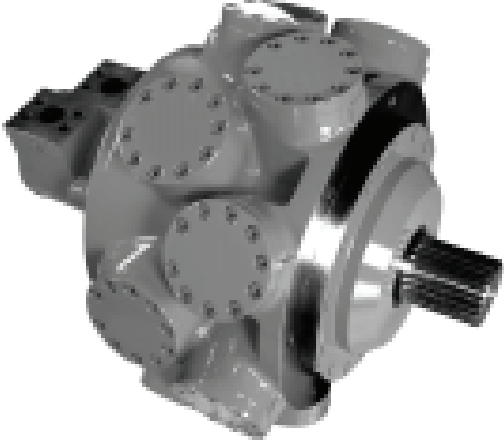



| | | |
|--|--|----------------------------------|
| Size 50 to 11,600 cc/rev, up to 250 bar, 36,000Nm, 240kW | Fixed Displacement Radial Piston Hydraulic Motor Staffa, Series B | Data Sheet M-1001/03.00 GB |
| <p>Features</p> <ul style="list-style-type: none"> ◇ Rugged, reliable, proven design. ◇ Unique Hydrostatic balancing provides minimum wear and extended life. ◇ High volumetric and mechanical efficiency. ◇ Capacities range from 50 to 11600 cc per rev. ◇ Large variety of Shaft and Porting options. ◇ Output torque up to 36000 Nm. ◇ Wide range of mounting interfaces available. ◇ Highly accurate electronic positional and velocity control systems also available. <div style="text-align: right; margin-right: 100px;">  </div> <p>Description</p> <p>The Kawasaki "Staffa" range of high torque low speed fixed displacement radial piston hydraulic motors consists of 13 frame sizes ranging from the HMB010 to HMB700. Capacity ranges from 50 to 11,600cc/rev.</p> <p>The rugged, well proven design incorporates high efficiency, combined with good breakout torque and smooth running capability.</p> <p>Various features and options are available including, on request, mountings to match competitors' interfaces.</p> <p>The Kawasaki "Staffa" range also includes dual and continuously variable displacement motors. To obtain details of this product range please refer to data sheet M-1002</p> | | |
| Model Staffa B | Page 1.70 | Data Sheet M-1001/03.00 |
|  | | |

Ordering Code – Staffa Motor Series B

F11 – HM*B – 060 – S3 – FM3 – Tx – * – PL**

Fluid Type
 Blank: Mineral oil.
 F3: Phosphate ester (HFD fluid).
 F11: Water-based fluids (HFA, HFB & HFC)
 * : Consult

Model Type
 Blank: Standard (HMB)
 HD: Heavy duty (HMHDB)

Frame Size
 (See options page 7)

Shaft Type
 See shaft type option list on Page 3

Main Port Connections
 See Port Connection details on Page 4

Special Features
 PL**: Non-catalogued features, (**)= number assigned as required.
 eg:
 Stainless steel shaft sleeves.
 Alternative port connections.
 Shaft variants.
 Alternative displacement.
 Special mountings.
 Special paint.

Design Series Number

Tacho/Encoder Drive
 Blank: None
 T: Staffa original tacho drive.
 Tx: Customer specific encoder drive.



Shaft Options

MOTOR TYPE

SHAFT DESCRIPTION

| | | | |
|---|--------|---|---|
| HMB010 | P* | = | Parallel keyed shaft Ø 40mm |
| HMB010 | S* | = | Involute spline 13 teeth BS3550 |
| HMB030/045 | (H)S* | = | Involute spline 17 teeth to BS3550 |
| HMB030/045 | (H)P | = | Parallel keyed shaft Ø 55mm |
| HMB030/045 | (H)Z* | = | Involute spline to DIN5480 (W55x3x17x7h) |
| HMB045 | Q* | = | Internal involute spline 21 teeth to BS3550 |
| HMB060/080/100 | (H)P* | = | Parallel keyed shaft Ø 60mm |
| HMB060/080/100 | (H)S* | = | Involute spline 14 teeth to BS3550 |
| HMB060/080/100 | (H)Z* | = | Involute spline to DIN5480 (W70x3x22x7h) |
| HMB060/080/100 | (H)Q* | = | Internal involute spline 24 teeth to BS3550 |
| HMB060/080/100/125/150/200/ HMB270/325 | T* | = | Long tapered keyed shaft |
| HMB060/080/100/270/325 | X* | = | Short tapered keyed shaft |
| HMB125/150/200/270/325 | (H)P1* | = | Parallel keyed shaft Ø 85mm |
| HMHDB125/150/200/270 & 325 | (H)P2* | = | Parallel keyed shaft Ø 100mm |
| HMB125/150/200/270/325 | (H)S3* | = | Involute spline 20 teeth to BS3550 |
| HMB125/150/200 | (H)S4* | = | Involute spline 16 teeth at 20° |
| HMHDB125/150/200, 270/325 | (H)S5* | = | Involute spline 23 teeth to BS3550 |
| HMB125/150/200 | (H)Z3* | = | Involute spline to DIN5480 (W85x3x27x7h) |
| HMHDB125/150/200 | (H)Z5* | = | Involute spline to DIN5480 (W100x4x24x7h) |
| HMHDB125/150/200/270/325 | (H)Q* | = | Internal involute spline 34 teeth to BS3550 |
| HMHDB125/150/200/270/325 | (H)X* | = | Short taper, keyed shaft |
| HMB270/325 + HMHDB270/325 | (H)Z* | = | Involute spline to DIN5480 (W100x4x24x7h) |
| HMHDB400 | P* | = | Parallel shaft with two keys Ø 100mm |
| HMHDB400 | S* | = | Involute spline 23 teeth to BS3550 |
| HMHDB400 | Z* | = | Involute spline to DIN5480 (W100x4x24x7h) |
| HMHDB400 | Q* | = | Internal involute spline 31 teeth to BS3550 |
| HMHDB400 | X* | = | Tapered keyed shaft |
| HMB700 | Z* | = | Involute spline to DIN5480 (W120x4x28x7h) |
| HMB700 | P | = | Parallel keyed shaft at 120° 120 Ø |

Notes:

* - For installations where shaft is vertically upwards specify "V" after shaft type letter to ensure that additional high level drain port is provided.

(H) - Use "H" prefix code as noted to specify "hollow" shaft with through hole Ø 26.2. Hollow shafts are available only with type "S04" main port connection.

For all shaft dimensions see the motor installation drawings



| | | |
|-------------------|--------------|----------------------------|
| Model Staffa B | Page 3.70 | Data Sheet M-1001/03.00 |
|-------------------|--------------|----------------------------|

Main Port Connections**Product Type****HMB010**

Blank = Two, four bolt flange ports of 20mm Ø

HMB030 Mono bloc

Blank = Rear entry ports G 3/4" (BSPF)
 F = Side port SAE 1" -4 Bolt (UNC) flange
 FM = Side port SAE 1" -4 Bolt (Metric) flange

HMB045 Mono bloc

Blank = Rear entry ports G 1" (BSPF)
 D = Dual entry ports G 1" (BSPF)

HMB030/045 Two part build (TPB)

See detail below

HMB060/080/100

F2 = SAE 1", 4 Bolt (UNC) flanges
 FM2 = SAE 1", 4 Bolt (Metric) flanges
 S03 = 6-Bolt (UNF) flange. (Staffa original valve housing)
 F3 = SAE 1 1/4" 4 Bolt (UNC) flanges
 FM3 = SAE 1 1/4" 4 Bolt (Metric) flanges
 S04⁽¹⁾ = 6 Bolt (UNF) flanges. (Staffa original valve housing)

HMB125/150/200 + Heavy Duty Variants Details as above, plus the following:

F4 = SAE 1 1/4" 4 Bolt (UNC) flanges
 FM4 = SAE 1 1/2" 4 Bolt (Metric) flanges

HMB270/325 + Heavy Duty Variants

F4 = SAE 1 1/2" 4 Bolt (UNC) flanges
 FM4 = SAE 1 1/2" 4 Bolt (Metric) flanges
 S04⁽¹⁾ = 6 Bolt (UNF) flanges. (Staffa original valve housing)

HMHDB400

Blank = Combined 6-Bolt flange and 4 Bolt SAE connection
 Ports "B" and "C" 6-Bolt UNF flange
 Ports "A" and "C" SAE, 2" 4-Bolt UNF flanges
 S045 = 2 x 6 Bolts (UNF) flanges (2 inlet and 2 outlet ports available)

HMB700











FM = Standard code 62
 SAE 2" 4 Bolt (Metric) flanges

Note:⁽¹⁾

Obligatory for hollow shafts type: HP, HS, HZ or HQ



.Functional Symbols

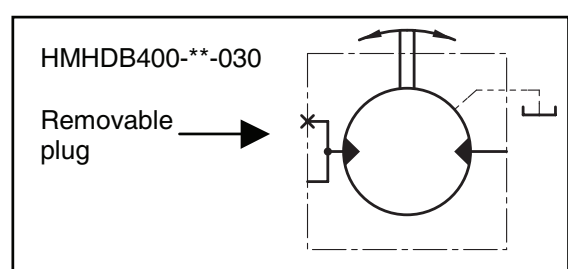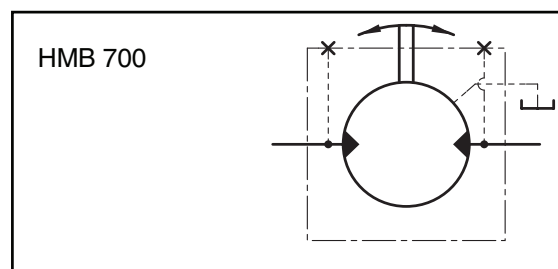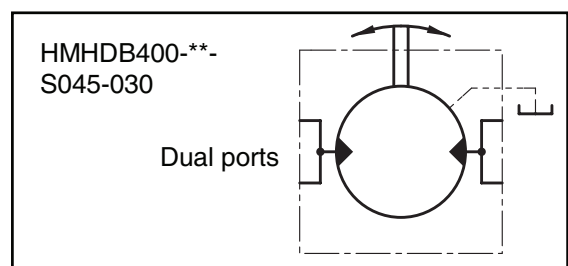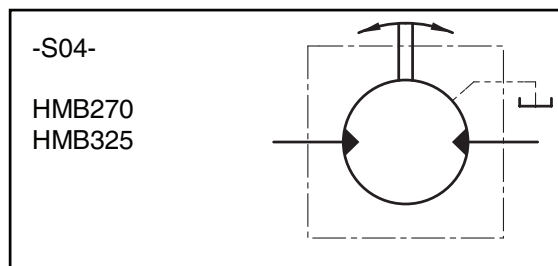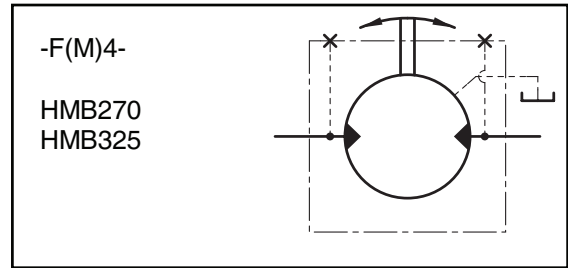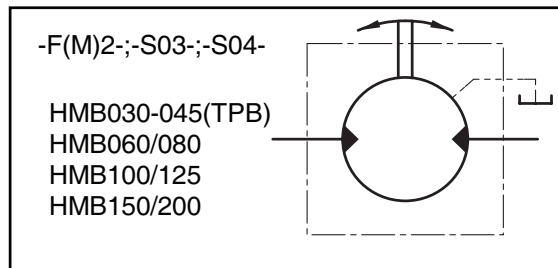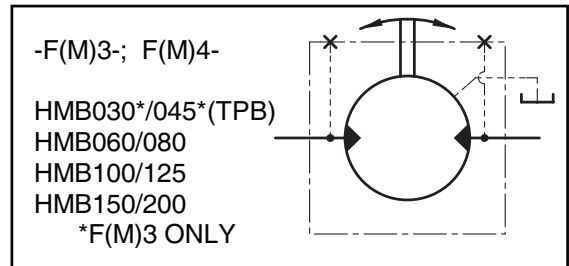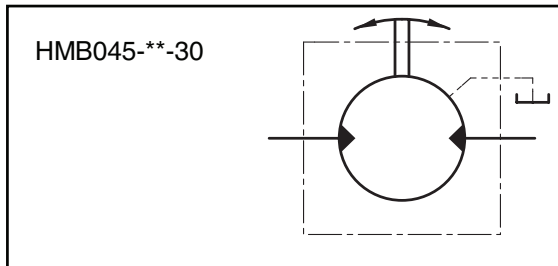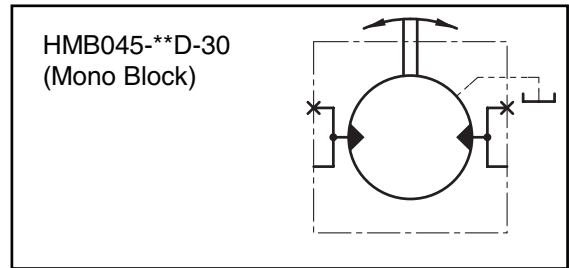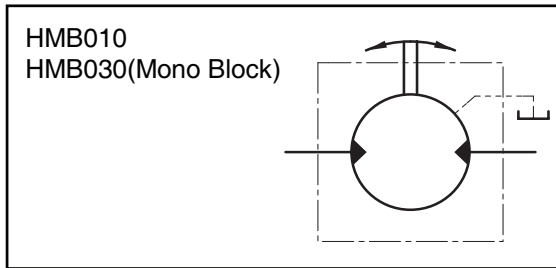

Performance Data**Intermittent max pressure**

B010 up to 241 bar

B700 up to 250 bar

All other models to 293 bar.

These pressures are allowable on the following basis:

- (a) Up to 50 r/min: 15% duty for periods up to 5 minutes maximum.
- (b) Over 50 r/min: 2% duty for periods up to 30 seconds maximum.

Continuous rating

For continuous duty the motor must be operating within each of the maximum values for speed, pressure and power.

Intermittent rating

Operation within the intermittent power rating (up to the maximum continuous speed) is permitted on a 15% duty basis, for periods up to 5 minutes maximum.

Limits for fire resistant fluids

| Fluid Type | Pressure, bar | | Max Speed r/min | Model type |
|---------------------------------|---------------|--------------|-------------------------------|-------------------|
| | Continuous | Intermittent | | |
| HFA 5/95% oil in emulsion | 103 | 138 | 50% of limits for Mineral Oil | All models |
| HFB 60/40 water in oil emulsion | 138 | 172 | As for Mineral Oil | All models |
| HFC water glycol | 103 | 138 | 50% of limits or Mineral Oil | All models |
| HFD phosphate ester | 207 | 241 | As for Mineral Oil | B010 |
| | 207 | 293 | | B030 |
| | 250 | 293 | | B045 to B400 inc. |
| | 210 | 250 | | B700 |

Performance Data Tables

| Motor type | Geometric displacement (cc/rcv) | Average actual running torque (Nm/bar) | Max. continuous speed (rev/min) | Max. continuous output (kW) | Max. continuous pressure. (bar) | Max. intermittent pressure (bar) |
|------------------------|------------------------------------|---|------------------------------------|--------------------------------|------------------------------------|-------------------------------------|
| B10 | 188 | 2.79 | 500 | 25 | 207 | 241 |
| B030 | 442 | 6.56 | 450 | 42 | 207 | 293 |
| B045 | 740 | 10,95 | 400 | 60 | 250 | 293 |
| B060 | 983 | 14.5 | 300 | 80 | 250 | 293 |
| B060 F2/FM2 | 983 | 14.5 | 200 | 75 | 250 | 293 |
| B080 | 1344 | 19.9 | 300 | 100 | 250 | 293 |
| B080 F2/FM2 | 1344 | 19.9 | 150 | 77 | 250 | 293 |
| B100 | 1639 | 24.3 | 250 | 110 | 250 | 293 |
| B100 F2/FM2 | 1639 | 24.3 | 125 | 80 | 250 | 293 |
| B125 | 2050 | 30.66 | 220 | 100 | 250 | 293 |
| B125 F2/FM2 | 2050 | 30.66 | 100 | 75 | 250 | 293 |
| B150 | 2470 | 36.95 | 220 | 115 | 250 | 293 |
| B150 F3/FM3/S03 | 2470 | 36.95 | 168 | 115 | 250 | 293 |
| B150 F2/FM2 | 2470 | 36.95 | 80 | 75 | 250 | 293 |
| B200 | 3080 | 46.07 | 175 | 130 | 250 | 293 |
| B200 F3/FM3/S03 | 3080 | 46.07 | 135 | 130 | 250 | 293 |
| B200 F2/FM2 | 3080 | 46.07 | 65 | 75 | 250 | 293 |
| B270 | 4310 | 63.79 | 125 | 140 | 250 | 293 |
| B325 | 5310 | 79.4 | 100 | 140 | 250 | 293 |
| B400 | 6800 | 101 | 120 | 190 | 250 | 293 |
| B700 | 11600 | 171.7 | 100 | 240 | 210 | 250 |

Model
StaffaPage
7.70Data Sheet
M-1001/03.00


Kawasaki
Hydraulic Products

Non-Standard Displacements

| Motor | Displacements cc/rev | | | | | | | | |
|----------|----------------------|------|------|------|------|-------|-----|-----|-----|
| | | | | | | | | | |
| HMB010 | 177 | 130 | 94 | 50 | | | | | |
| HMB030 | 492 | 477 | 455 | 330 | 320 | 300 | 278 | 251 | 213 |
| HMB045 | 800 | 700 | 634 | 570 | 500 | 440 | | | |
| HMB080 | 1250 | 1100 | 1000 | | | | | | |
| HMB100 | 1530 | 1500 | | | | | | | |
| HMB125 | 1800 | | | | | | | | |
| HMB150 | 1880 | 2130 | | | | | | | |
| HMB200 | 3630* | 2870 | | | | | | | |
| HMHDB200 | 3630* | 2785 | | | | | | | |
| HMB270 | 4588 | 4500 | 3688 | 3600 | | | | | |
| HMHDB270 | 4000 | | | | | | | | |
| HMB325 | 6100* | 5187 | | | | | | | |
| HMHDB400 | 6137 | 6468 | 5322 | 4340 | 4000 | 8000* | | | |
| HMB700 | 10600 | 9600 | 8850 | | | | | | |

Note:


* Reduced pressure and power rating.




Output Torque

These torque curves indicate the maximum output torque and power of a fully run-in motor for a range of pressures and speeds when operating with zero outlet pressure on Mineral Oil of 50 cSt (232 SUS) viscosity. High return line pressures will reduce torque for a given pressure differential. – x – x – Upper limit of continuous rating envelope.


B010

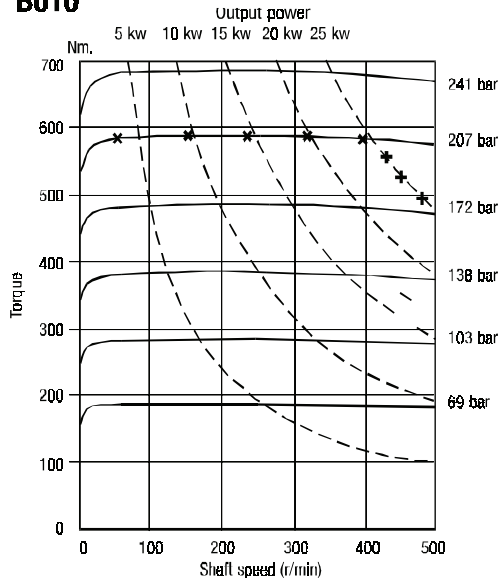


B030

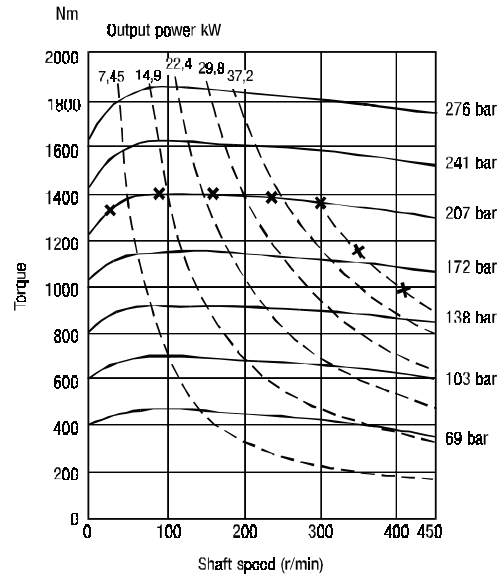

B045

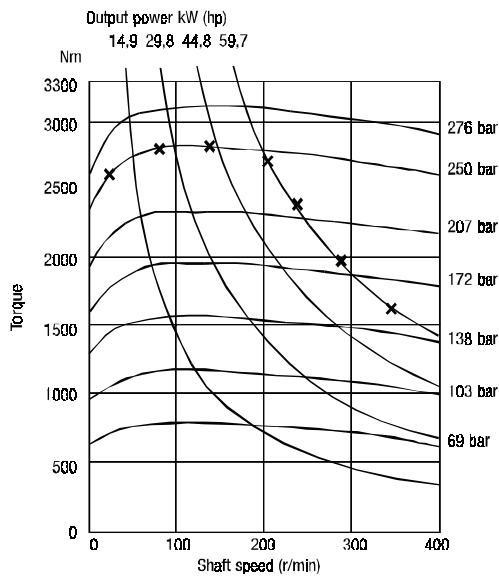

B060

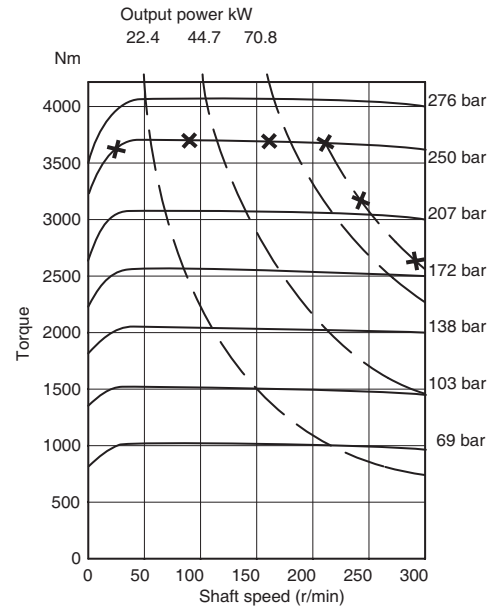


Model Staffa

Page 9.70


Data Sheet M-1001/03.00

Output Torque (continued)


B080

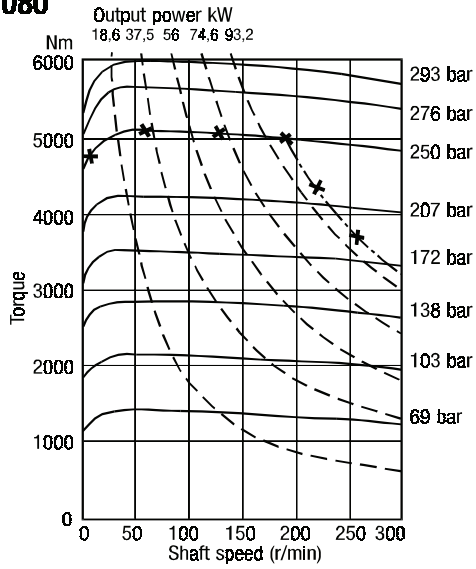


B100

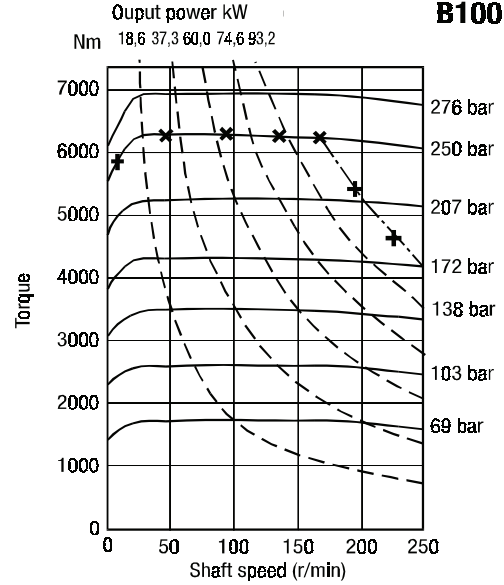

B125

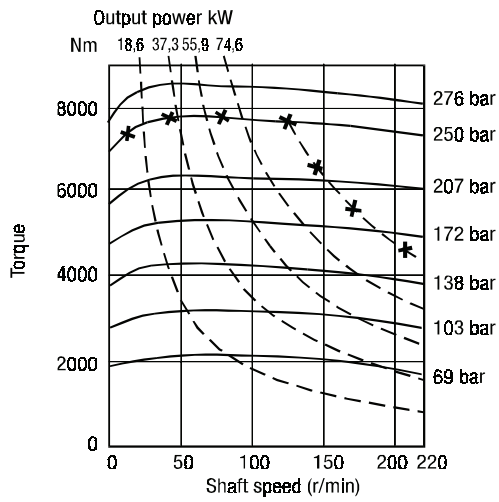


B150

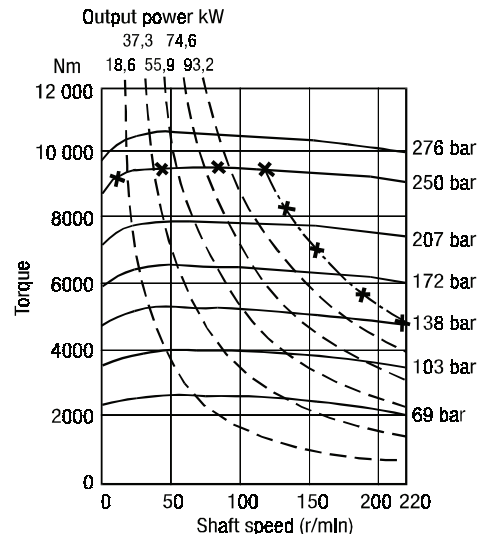


Output Torque (continued)


B200

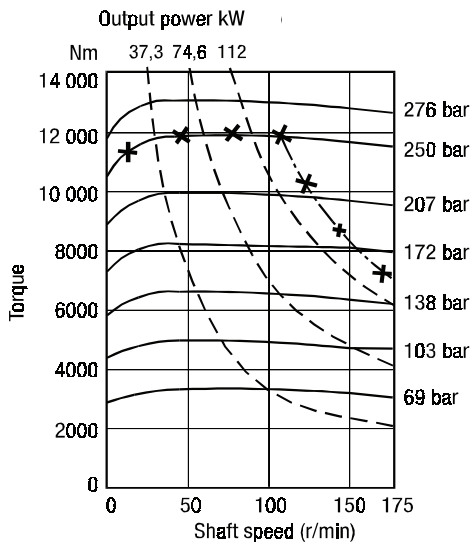


B270

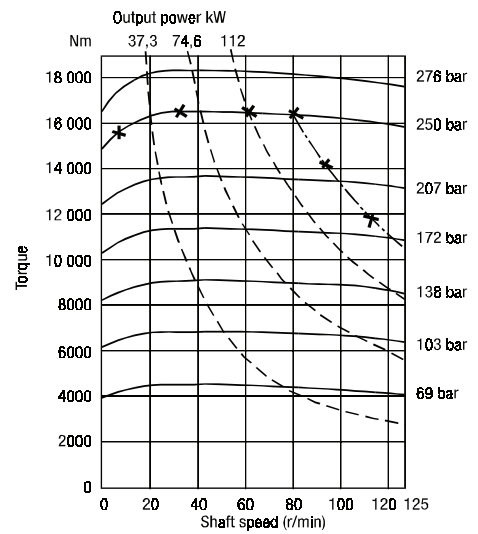

B325

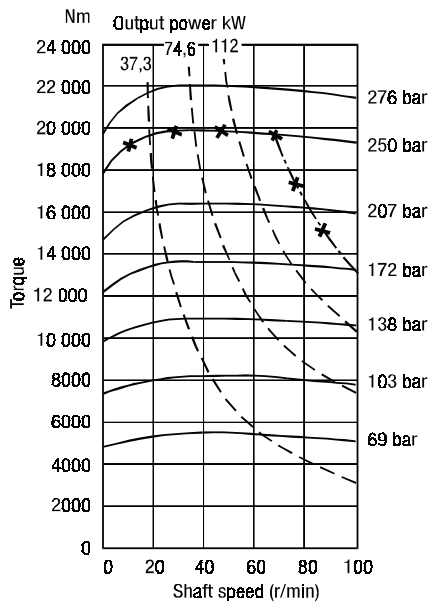

B400

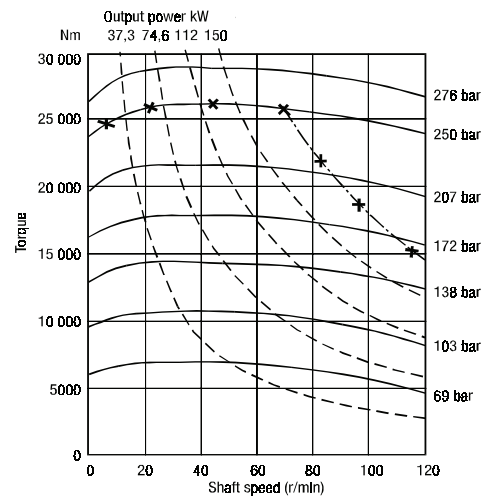


Model Staffa

Page 11.70

Data Sheet M-1001/03.00

Output Torque (continued)

B700

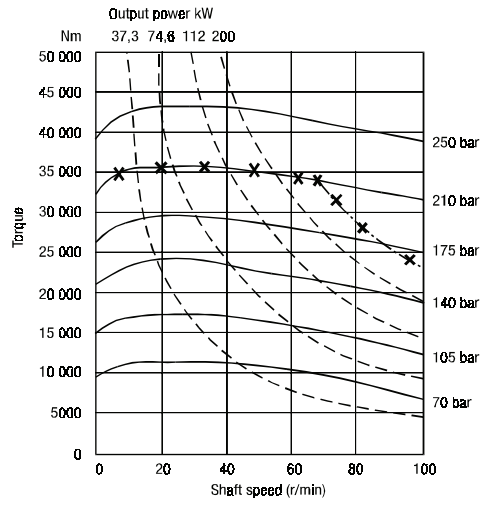


Model Staffa

Page 12.70

Data Sheet M-1001/03.00

Bearing Life Graphs
HMB 010 Shaft Types P and S

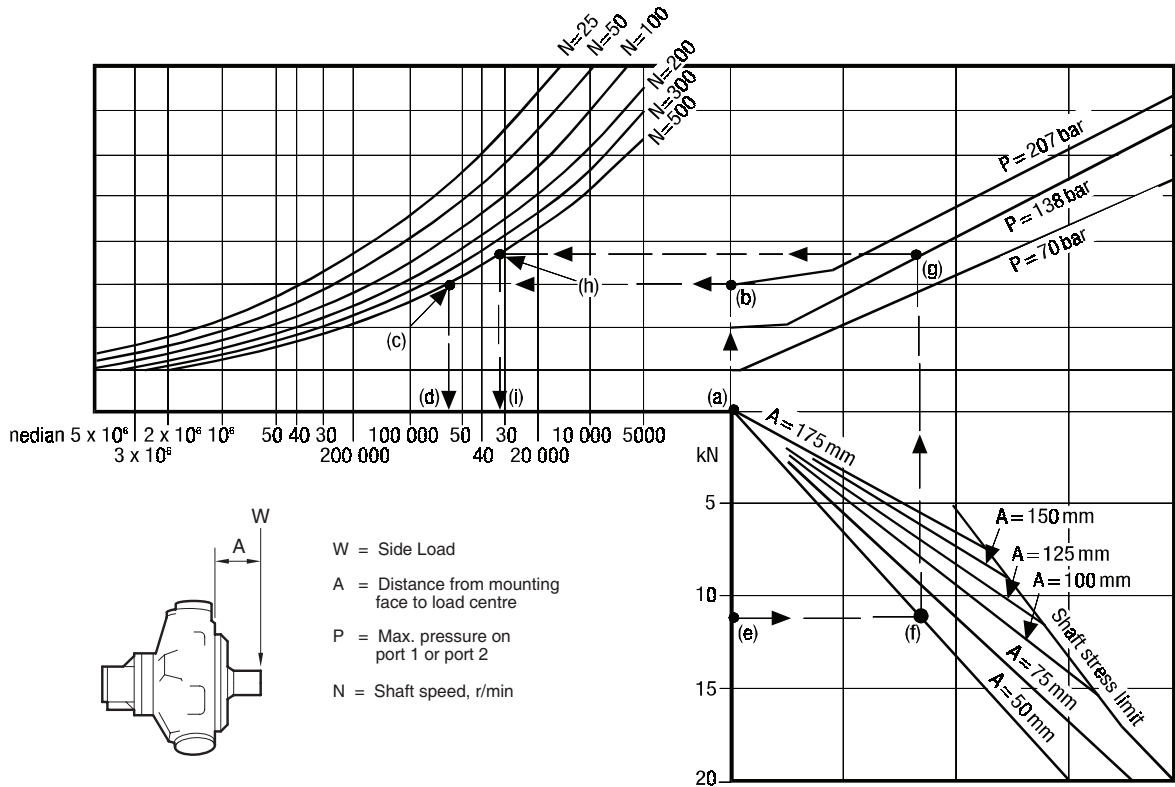

Example 1 (follow chain dotted line):

| | |
|-----------------------------------|-----------------|
| Side load (W) | (a) 0 |
| System pressure (P) | (b) 207 bar |
| Speed (N) | (c) 500 r/min. |
| Median bearing life | (d) 55,000 hrs. |
| L10 bearing rating = median x 0.2 | 11,000 hrs. |


Example 2 (follow chain dotted line):

| | |
|--|-----------------|
| Side load (W) | (e) 11 kN |
| Load offset (A) from motor mounting face | (f) 50 mm |
| System pressure (P) | (g) 136 bar |
| Speed (N) | (h) 500 r/min. |
| Median bearing life | (i) 31,000 hrs. |
| L10 bearing rating = median x 0.2 | 6,200 hrs |




| | | |
|--------------|------------|-------------------------|
| Model Staffa | Page 13.70 | Data Sheet M-1001/03.00 |
|--------------|------------|-------------------------|

Bearing Life Graphs (continued)
HMB030 Shaft Types P, S, and Z

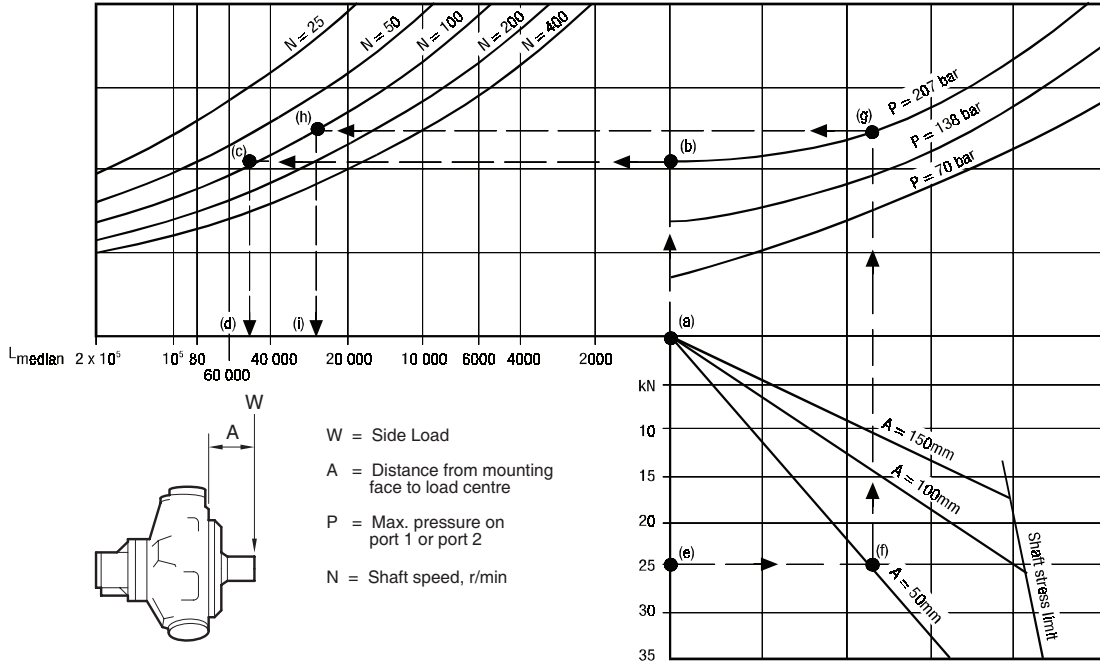


HMB045 Shaft Types P, S, and Z

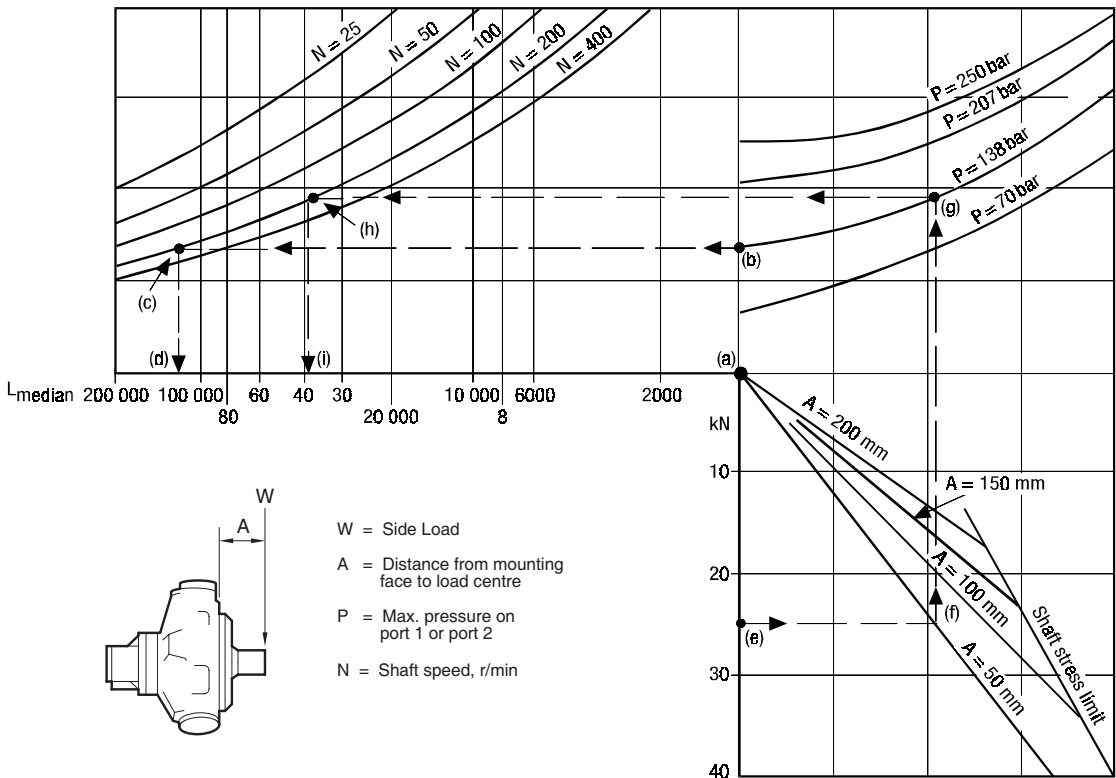


Bearing Life Graphs (continued)

HMB 060, HMB080, HMB100 Shaft Types P, S, Z, X

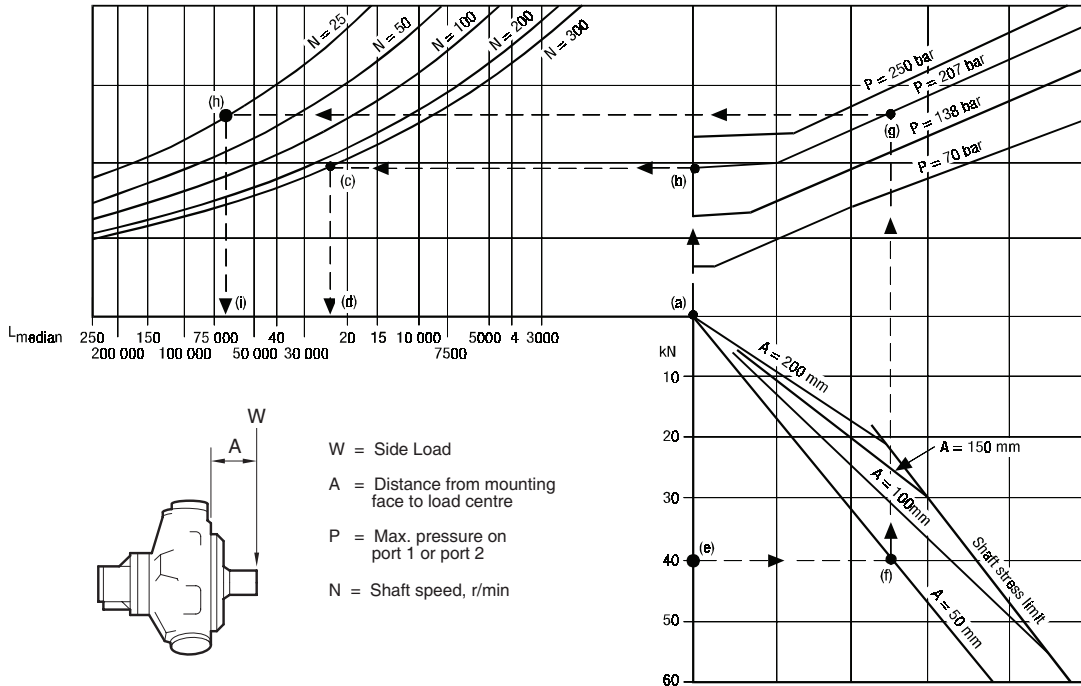


HMB125, HMB 150, HMB200 Shaft Types P1, S3, S4, Z3, T

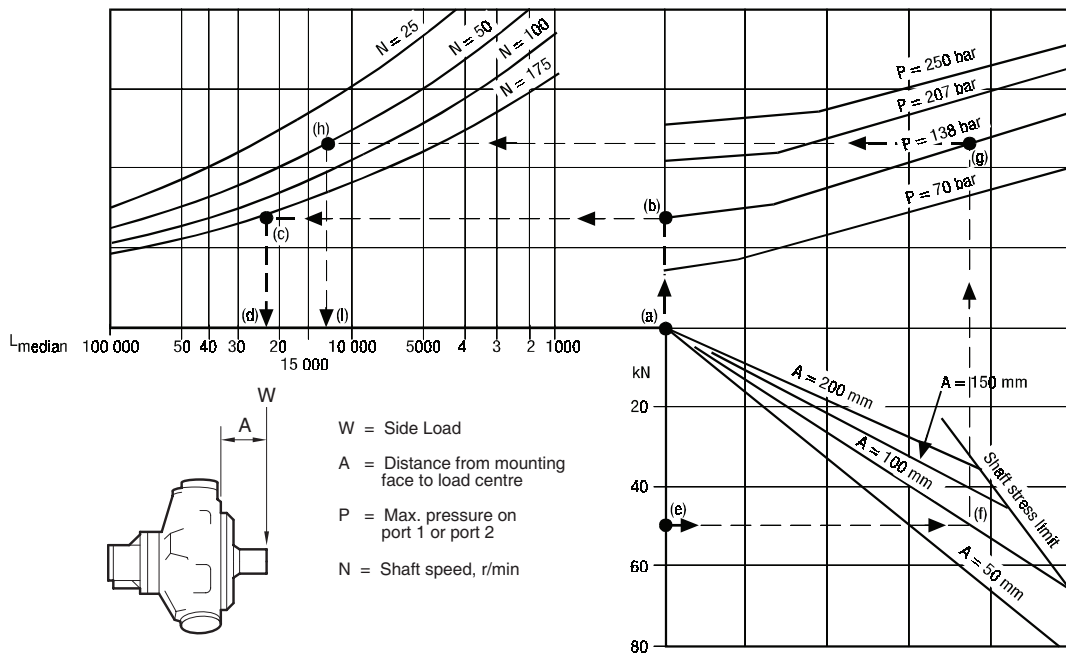


| | | |
|--------------|------------|-------------------------|
| Model Staffa | Page 15.70 | Data Sheet M-1001/03.00 |
|--------------|------------|-------------------------|

Bearing Life Graphs (continued)

HMHDB270, 325 Shaft Type P2, S5, Z and X

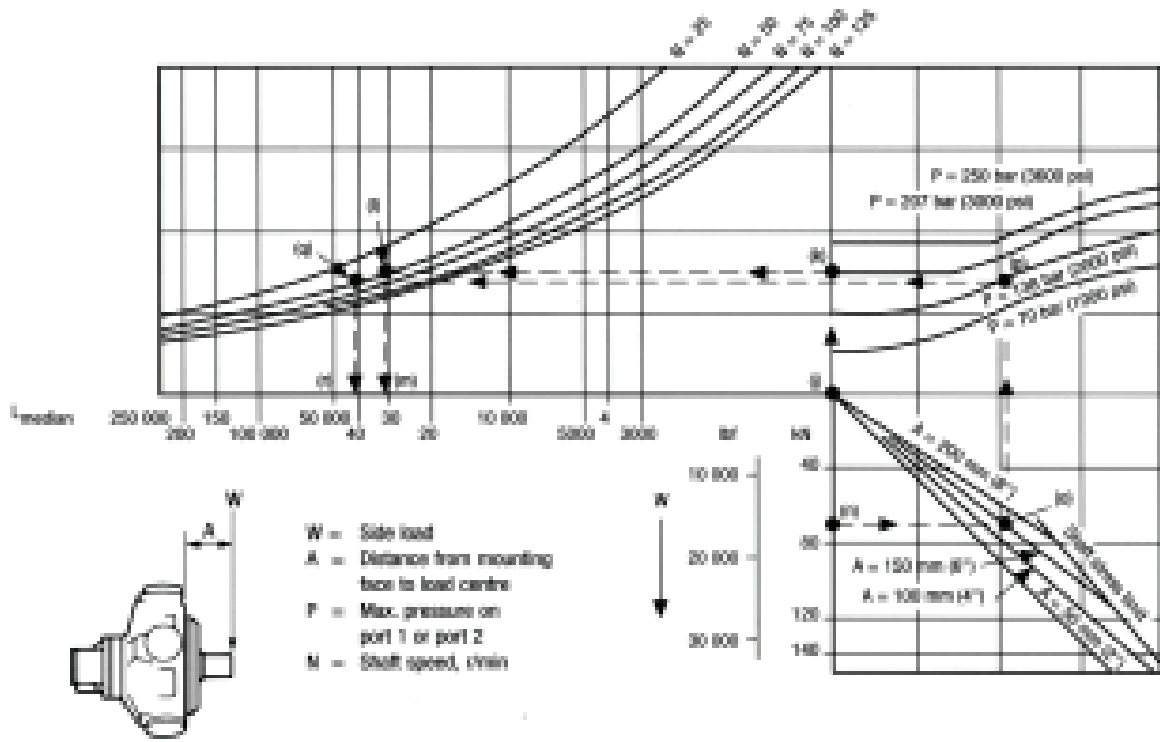

HMHDB400 Shaft Types P, S, Z, and X

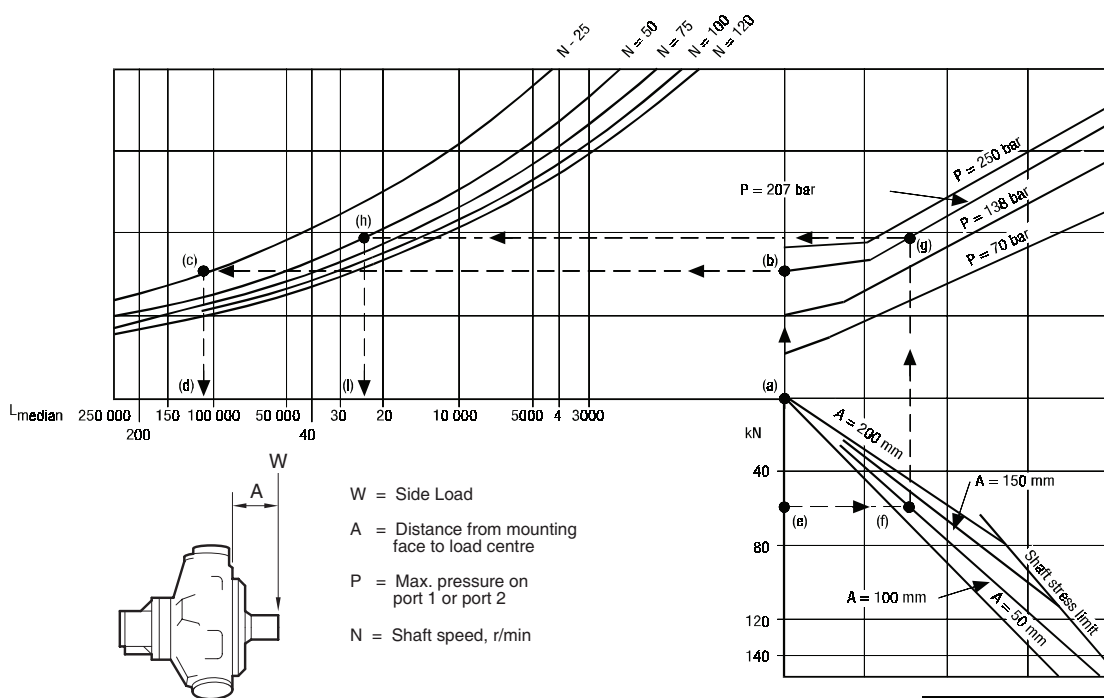



Model Staffa

Page 17.70

Data Sheet M-1001/03.00

Bearing Life Graphs (continued)


HMB700 Shaft Type P and Z

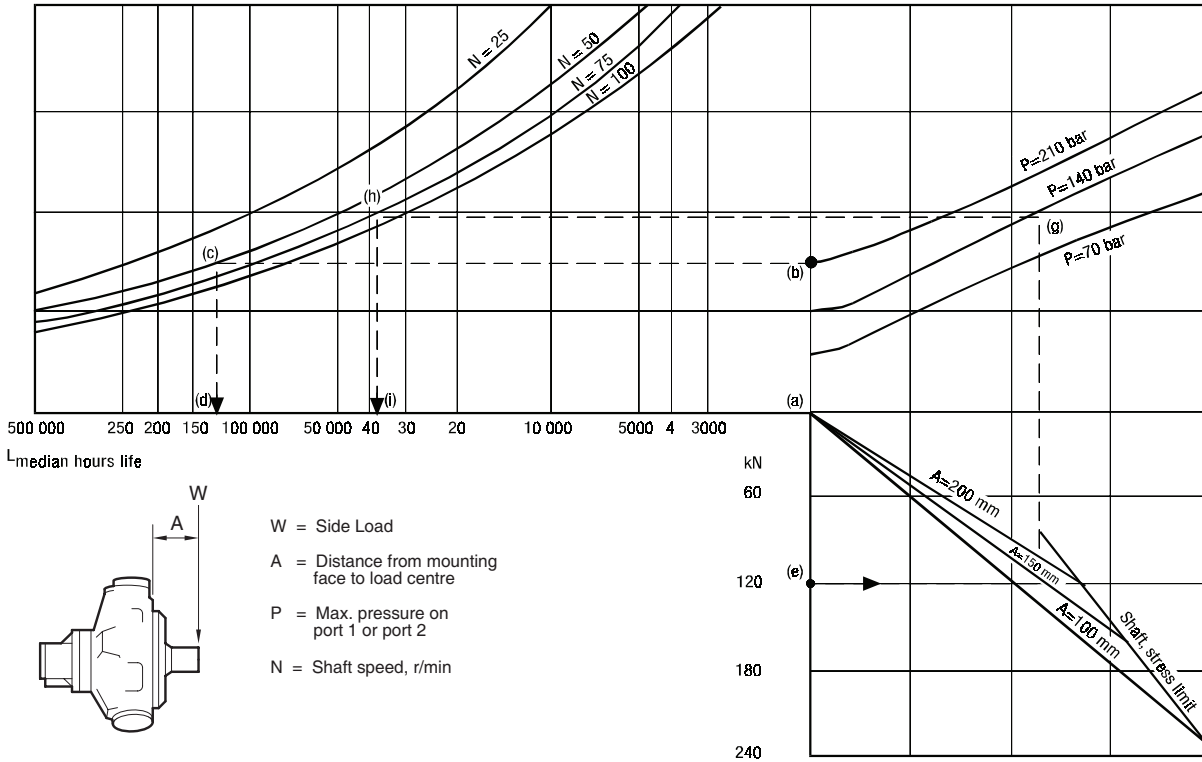

Volumetric Efficiency

These nomographs enable the average volumetric efficiency, crankcase (drain) leakage and “winch slip”/shaft creep speed to be estimated. The shaft creep occurs when the load attempts to rotate the motor against the closed ports as may occur, for example in winch applications.

B010

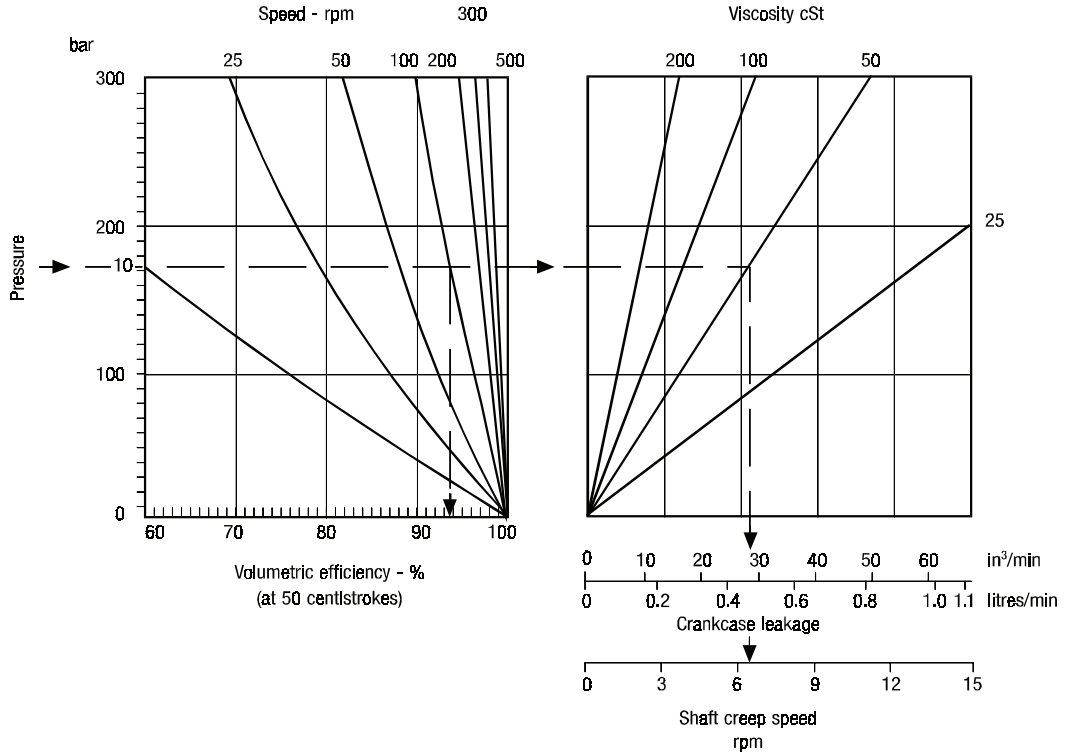

Example (follow chain dotted line):

Given:

- 1. Pressure175 bar
- 2. Speed 100 r/min
- 3. Viscosity50 cSt (232 SUS)

To obtain:


- 4. Volumetric efficiency94.2%
- 5. Crankcase leakage 0.451 l/min (27.4 in³/min)
- 6. Shaft creep speed6.4 r/min




| | | |
|--------------|------------|-------------------------|
| Model Staffa | Page 19.70 | Data Sheet M-1001/03.00 |
|--------------|------------|-------------------------|

Volumetric Efficiency (continued)

B030

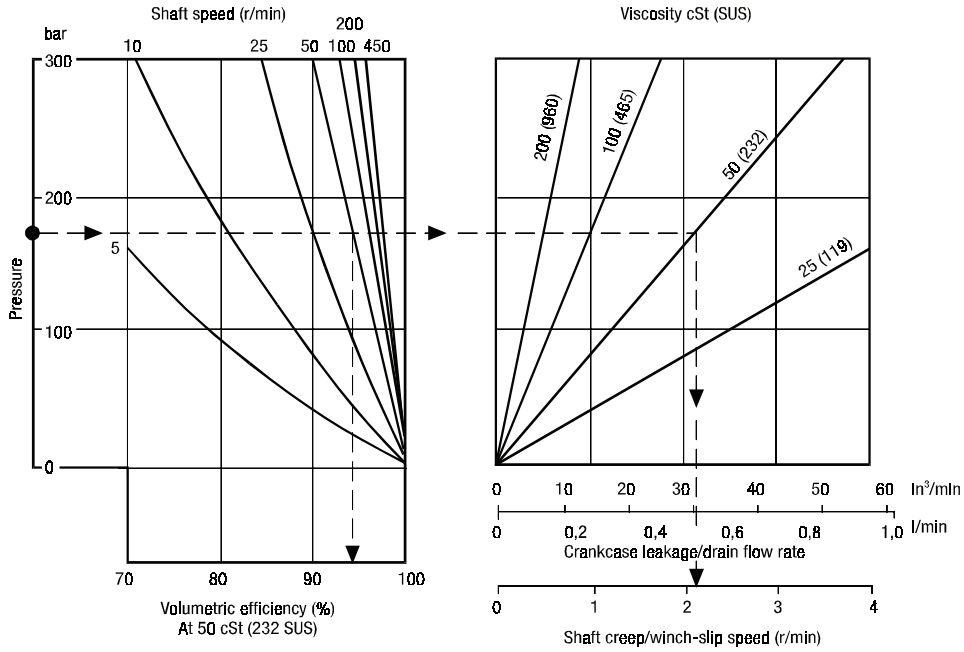


B045

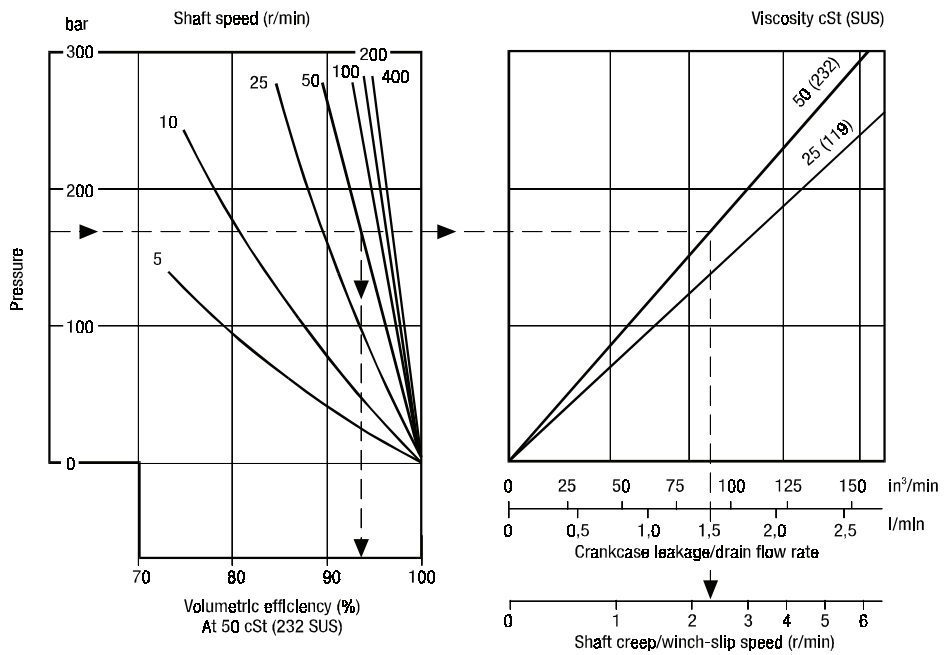


Volumetric Efficiency (continued)

B060

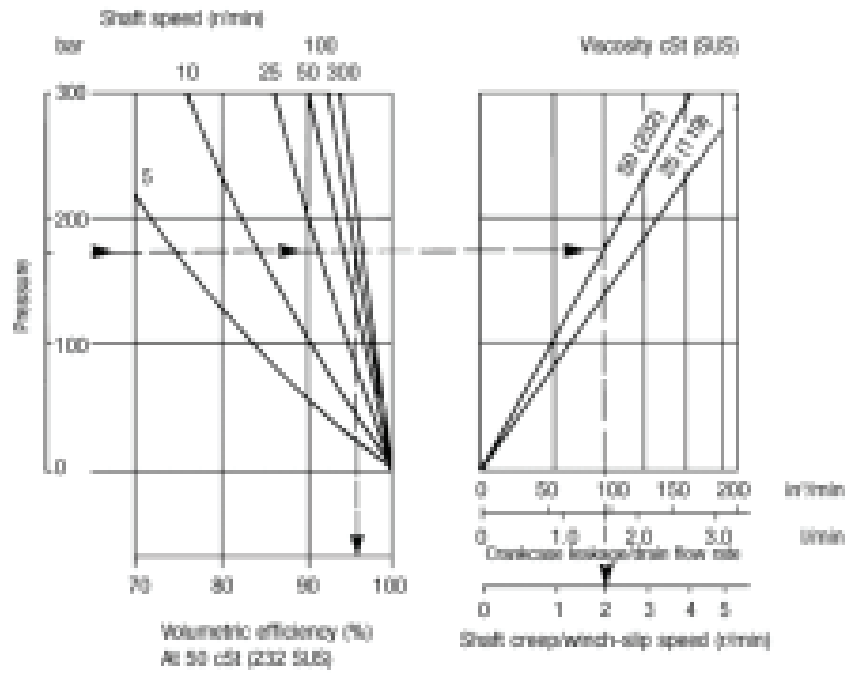

B080

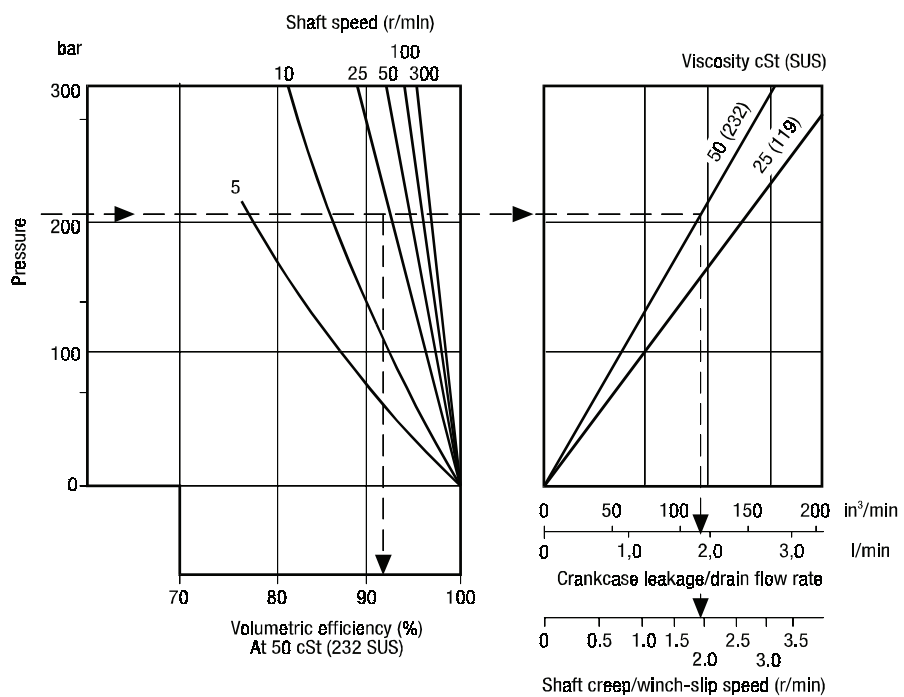


Model Staffa

Page 21.70


Data Sheet M-1001/03.00

Volumetric Efficiency (continued)

B100

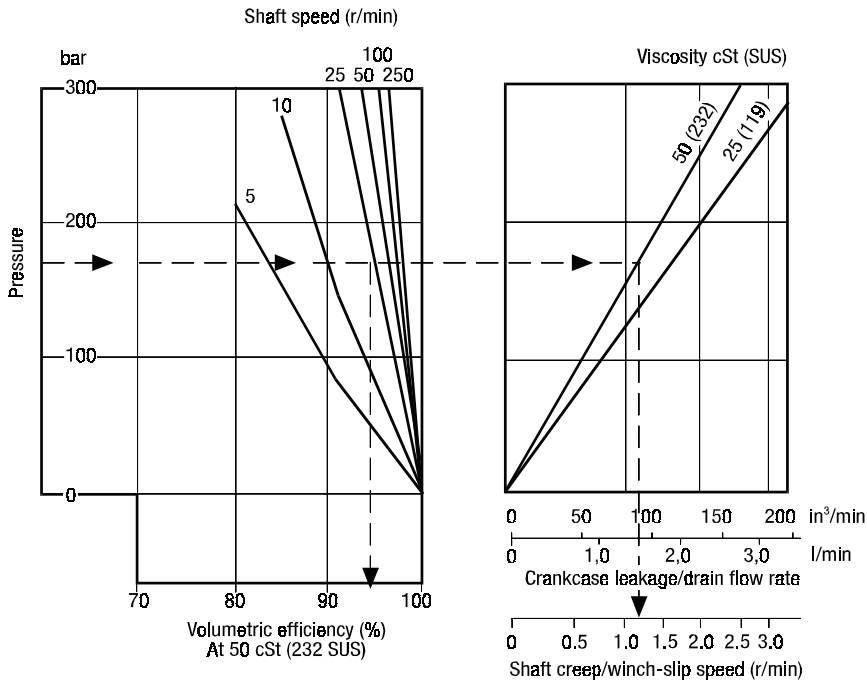


B125

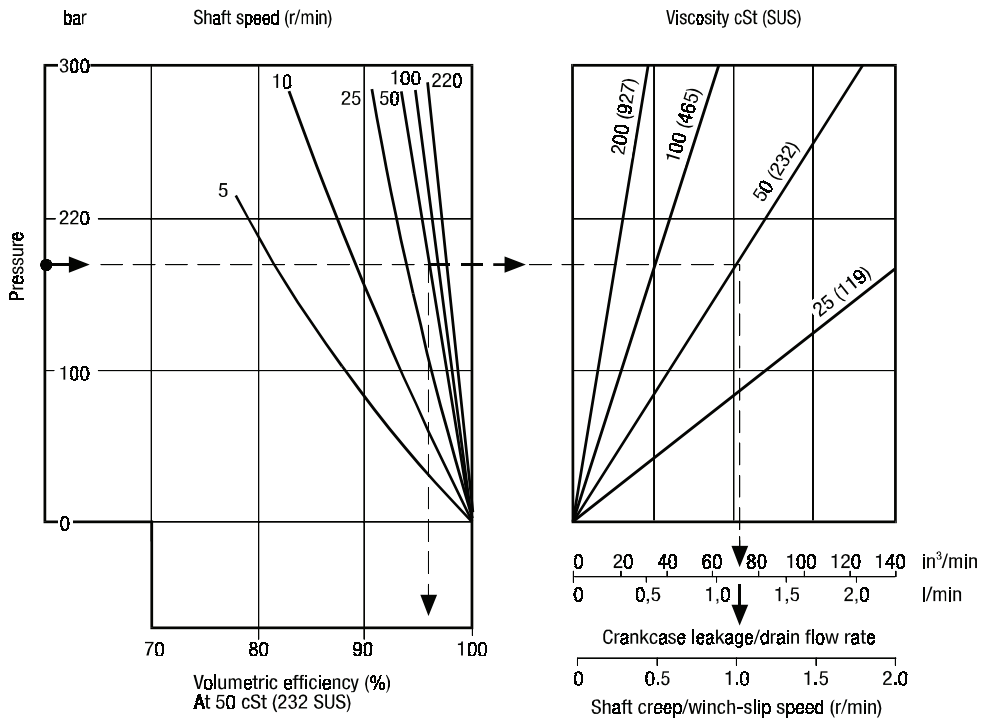


Volumetric Efficiency (continued)

B150

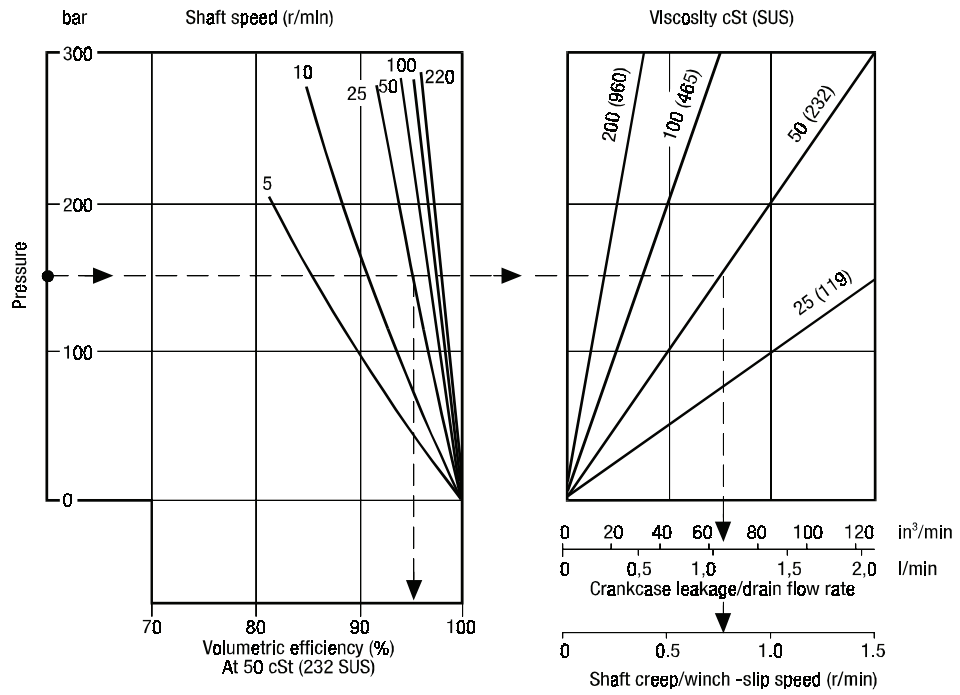

B200

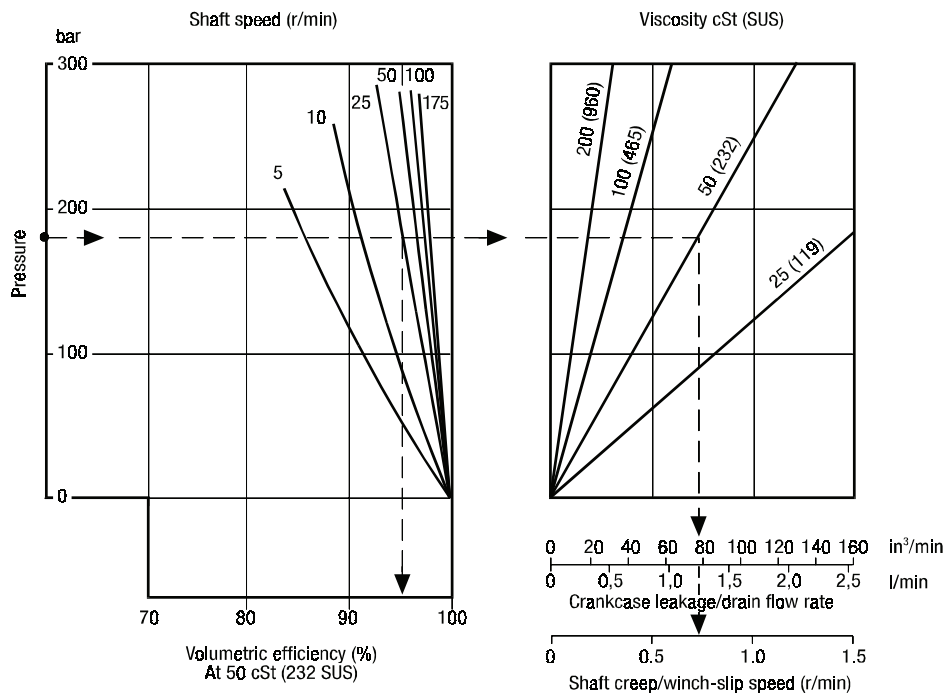


Model Staffa

Page 23.70


Data Sheet M-1001/03.00

Volumetric Efficiency (continued)

B270

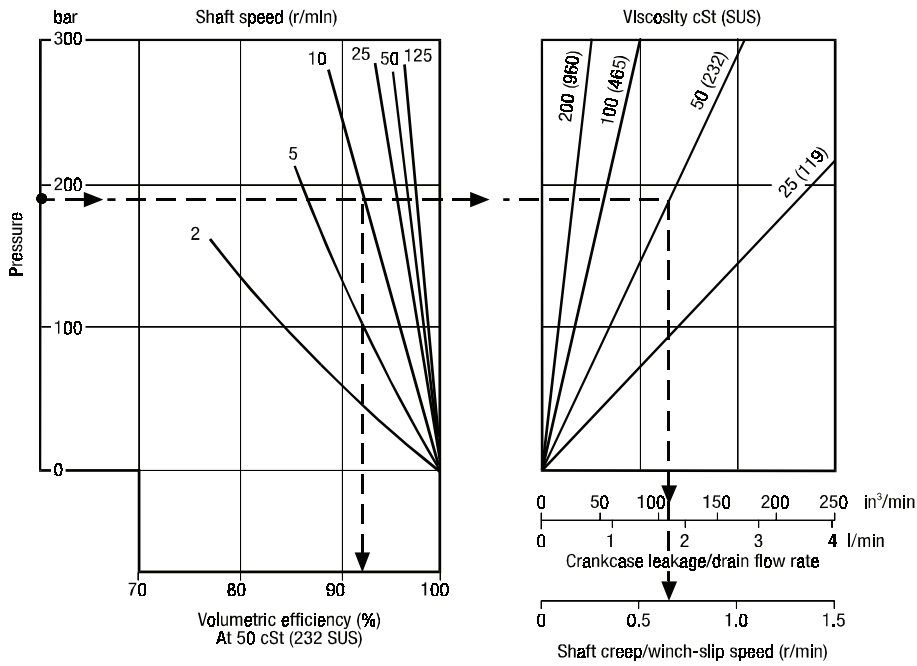


B325

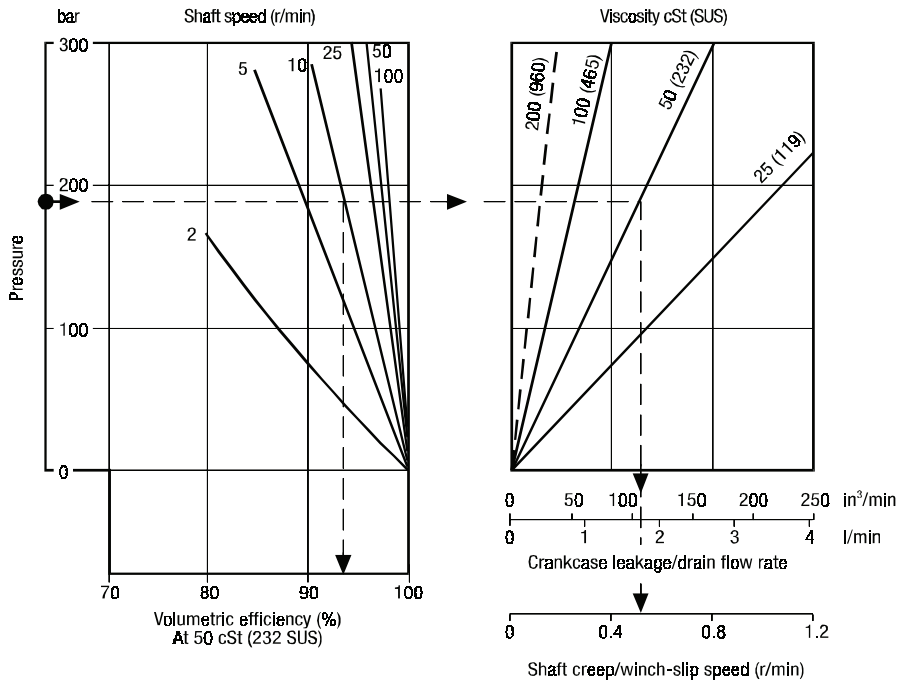


Volumetric Efficiency (continued)

B400

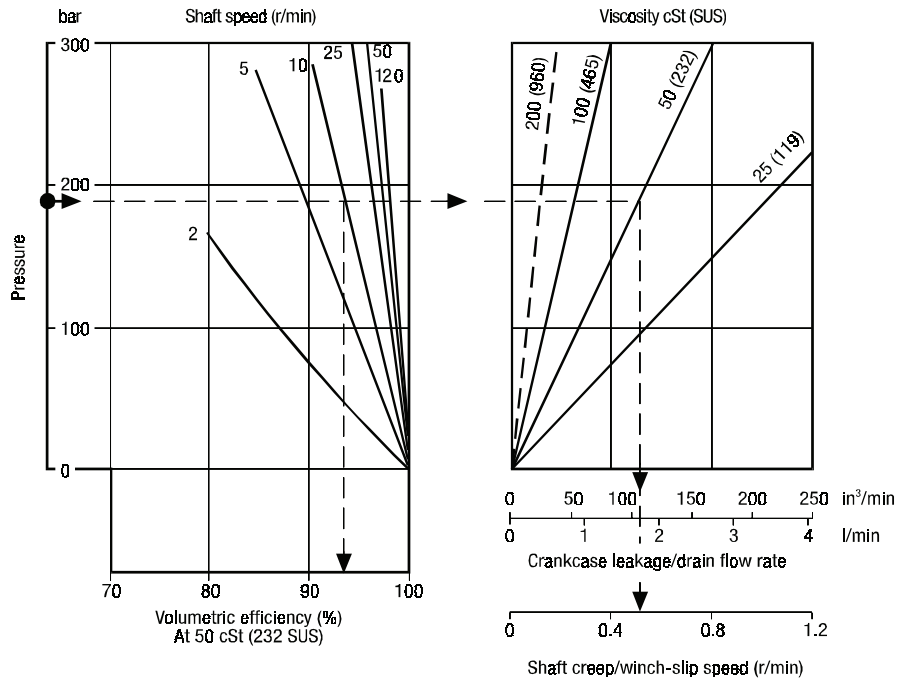

B700

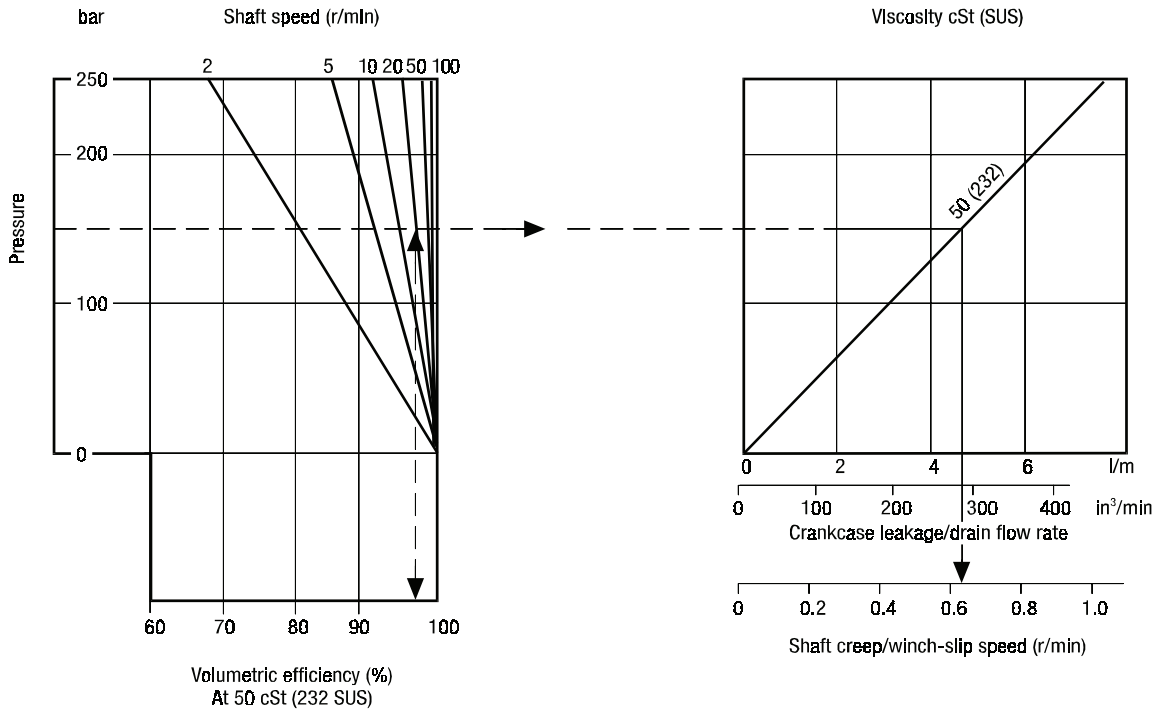

Model Staffa

Page 25.70

Data Sheet M-1001/03.00

Circuit and Application Notes**Starting Torque**

The starting torques shown on the graphs on pages 9 to 12 are average and will vary with system parameters.

Low Speed Operations

Minimum operating speeds are determined by the hydraulic system and load conditions (load inertia, drive elasticity, etc.) Recommended minimum speeds are shown below:

| Model Type | r/min |
|------------------------|-------|
| B010 | 20 |
| B030 | 5 |
| B045 | 6 |
| B06080/100/125/150/200 | 3 |
| B270/B325/HMB400 | 2 |
| B700 | 1 |

Note: Speed as low as 0.025 rpm can be accurately achieved using electronic control systems. For operation at speeds below these figures please contact Kawasaki Precision Machinery (UK) Ltd.

High Back Pressure

When both inlet and outlet ports are pressurised continuously, the lower port pressure must not exceed 70 bar at any time.

Note: High back pressure reduces the effective torque output of the motor.

Boost Pressure

When operating as a motor the outlet pressure should equal or exceed the crankcase pressure . If pumping occurs (i.e. overrunning loads) then a positive pressure , "P" ,is required at the motor ports .Calculate "P" (bar) from the operating formula

$$\text{Boost Formula } P = 1 + \frac{N^2 \times V^2}{K} + C$$

Where P is in Bar, N = motor speed (RPM), V = motor displacement (cc/rev.), C=Crankcase pressure (BAR) and K=a constant from the table below:

| MOTOR | PORTING | CONSTANT |
|--------------------|------------|----------------------|
| HMB010 | Standard | 8×10^8 |
| HMB030 | Standard | 3.7×10^9 |
| | SO3, F(M)3 | 7.5×10^9 |
| HMB045 | Standard | 1.3×10^{10} |
| | SO3, F(M)3 | 1.6×10^{10} |
| HMB060/080/100 | F(M)2 | 2.7×10^9 |
| | F(M)3, S03 | 1.8×10^{10} |
| HM(HD)B125/150/200 | F(M)2 | 4.2×10^9 |
| | F(M)3, S03 | 4.0×10^{10} |
| | F(M)4, S04 | 8.0×10^{10} |
| HM(HD)B270/325 | F(M)4, S04 | 7.2×10^{10} |
| HMHDB400 | Standard | 6.0×10^{10} |
| | S045 | 7.2×10^{10} |
| HMB700 | Standard | 1.3×10^{11} |



Circuit and Application Notes (continued)

The flow rate of oil needed for the make-up system can be estimated from the crankcase leakage figure (see Volumetric Efficiency graphs pages 19 to 29) Allowances should be made for other system losses and also for "fair wear and tear" during the life of the motor, pump and system components.

Cooling Flow

Operating within the continuous rating does not require any additional cooling.

For operating conditions above "continuous", up to the "intermittent" rating, additional cooling oil may be required.

This can be introduced through the spare crankcase drain holes, or in special cases through the valve spool end cap. Consult Kawasaki about such applications.

Motor Casing Pressure

With the standard shaft seal fitted, the motor casing pressure should not exceed 3.5 bar.

Notes:

1. The casing pressure at all times must not exceed either the motor inlet or outlet pressure.
2. High pressure shaft seals are available for casing pressures of:
 - 6 Bar for HMB700
 - 9 Bar for HMB 010
 - 10 Bar for all remaining frame sizes.
3. Check installation dimensions for maximum crankcase drain fitting depth.

Hydraulic Fluids

Dependent on motor (see Ordering Code.) suitable fluids include:

- (a) Antiwear hydraulic oils.
- (b) Phosphate ester (HFD fluids)
- (c) Water glycols (HFC fluids)
- (d) 60/40% water-in-oil emulsions (HFB fluids).
- (e) 5/95% oil-in-water emulsions (HFA fluids)

Reduce pressure and speed limits, see page 6.

Viscosity limits when using any fluid except oil-in-water (5/95) emulsions are;

| | |
|---------------|--------------------|
| Max. off load | 2000cSt (9270 SUS) |
| Max. on load | 150 cSt (695 SUS) |
| Optimum | 50 cSt (232 SUS) |
| Minimum | 25cSt (119 SUS) |



Model
Staffa

Page
27.70

Data Sheet
M-1001/03.00

Circuit and Application Notes (continued)**Mineral Oil recommendations**

The fluid should be a good hydraulic grade, non-detergent Mineral Oil. It should contain anti-oxidant, anti-foam and demulsifying additives. It should contain antiwear or EP additives. Automatic transmission fluids and motor oils are not recommended.

Temperature limits

| | |
|-----------------------------------|-------------------|
| Ambient min. | -30°C (-22°F) |
| Ambient max. | + 70°C (158°F) |
| Max. operating temperature range. | |
| Mineral Oil | Water- containing |
| Min -20°C (-4°F) | +10°C (50°F) |
| Max. + 80°C (175°F) | +54°C (130°F) |

Note: To obtain optimum services life from both fluid and hydraulic systems components, a fluid operating temperature of 40°C is recommended.

Filtration

Full flow filtration (open circuit), or full boost flow filtration (close circuit) to ensure system cleanliness to ISO4406/1986 code 18/14 or cleaner.

Noise levels

The airborne noise level is less than 66.7 dB(A) DIN (&) dB (A) NFPA) through the “continuous” operating envelope. Where noise is a critical factor, installation resonances can be reduced by isolating the motor by elastomeric means from the structure and the return line installation. Potential return line resonances originating from liquid borne noise can be further attenuated by providing a return line back pressure of 2 to 5 bar.

Polar Moment of Inertia & Mass:

| Model Type | Polar moment of Inertia (kg.m ²) (Typical data) | Mass (kg) (Approx. all models) |
|----------------------------|---|-----------------------------------|
| HMB010 | 0.0076 | 40 |
| HMB030 | 0.015 | 73 |
| HMB045 | 0.047 | 120 |
| HMB060 | 0.055 | 144 |
| HMB080 | 0.060 | 144 |
| HMB100 | 0.076 | 144 |
| HMB125 | 0.22 | 217 |
| HMB150 | 0.25 | 265 |
| HMB200 | 0.27 | 265 |
| HMB270 | 0.91 | 420 |
| HMB325 | 0.95 | 429 |
| HMHDB400 (With 4" valve) | 0.54 | 481 |
| HMHDB400 (With 4.5" valve) | 0.54 | 510 |
| HMB700 | 2.38 | 1050 |



Crankcase Drain**Motor axis horizontal.**


The crankcase drain must be taken from a position above the horizontal centre line of the motor to ensure lubrication of the shaft bearing

Axis vertical, shaft down.

Use either drain position. The drain line should be run above the level of the uppermost bearing. If there is a risk of syphoning then a syphon breaker should be fitted.

Axis vertical, shaft up.

An additional G $\frac{1}{4}$ " (BSPF) drain port is provided when "V" (shaft vertically upwards) designator is given after the shaft type (see Ordering Code). This additional drain should be connected into the main motor casing drain line downstream of a 0.35 bar check valve to ensure lubrication of the upper bearing, see diagram.



Installation Data

GENERAL**Spigot:**

The motor should be located by the mounting spigot on a flat, robust surface using correctly sized bolts. The diametrical clearance between the motor spigot and the mounting must not exceed 0.15mm. If the application incurs shock loading, frequent reversing or high speed running, then high tensile bolts should be used, including one fitted bolt.

Bolt Torque:

The recommended torque wrench setting for bolts are as follows:

| | |
|--|---------------|
| M12 | 97 +/- 7Nm |
| M14 | 160 +/- 21Nm |
| M18 | 312 +/- 14Nm |
| M20 | 407 +/- 14Nm |
| M24 | 690 +/- 27Nm |
| $\frac{1}{2}$" UNF | 97 +/- 7Nm |
| $\frac{5}{8}$" | 265 +/- 14 Nm |
| $\frac{3}{4}$" bolts | 393 +/- 14 Nm |
| 1" | 810 +/- 27Nm |


Shaft Coupling:

Where the motor is solidly coupled to a shaft having independent bearings the shaft must be aligned to within 0.13mm TIR


Model
StaffaPage
29.70Data Sheet
M-1001/03.00

Installation Drawings HMB010 Motor

(See additional views for shaft types)

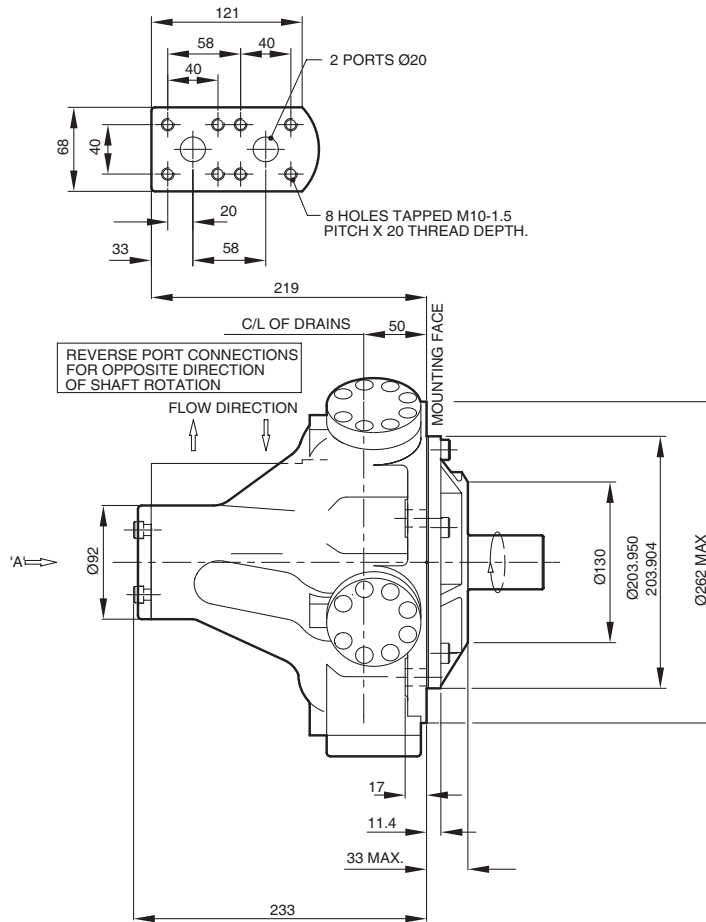

3/8-BSP DRAIN (CHOICE OF 3 POSITIONS)
(2 NORMALLY PLUGGED)
NOTE:
ENSURE ON INSTALLATION DRAIN IS
TAKEN FROM ABOVE MOTOR \odot
DO NOT EXCEED 12 DEPTH OF
COUPLING INTO DRAIN PORT

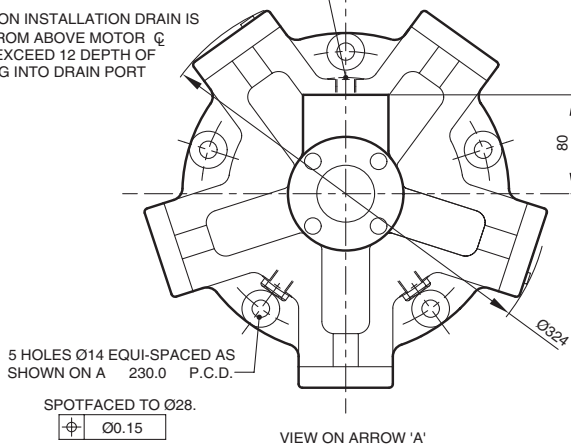


Model
Staffa

Page
30.70

Data Sheet
M-1001/03.00

Shaft Specification HMB010


SHAFT TYPE 'S'
13 SPLINES TO BS 3550-

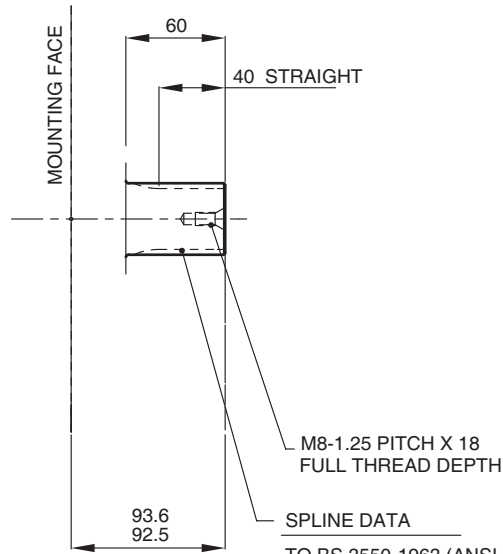

| | |
|--|---------------|
| TO BS 3550-1963 (ANSI B92.1, 1970 CLASS 5) | |
| FLAT ROOT SIDE FIT, CLASS 1 | |
| PRESSURE ANGLE | 30° |
| NUMBER OF TEETH | 13 |
| PITCH | 8/16 |
| MAJOR DIAMETER | 43.71/43.59 |
| FORM DIAMETER | 38.136 |
| MINOR DIAMETER | 37.36/36.91 |
| PIN DIAMETER | 6.096 |
| DIAMETER OVER PINS | 50.104/50.152 |

SHAFT TYPE 'P'
CYLINDRICAL SHAFT WITH KEY

KEY (SUPPLIED):
10.030/10.015 WIDE
8.000/7.964 THICK

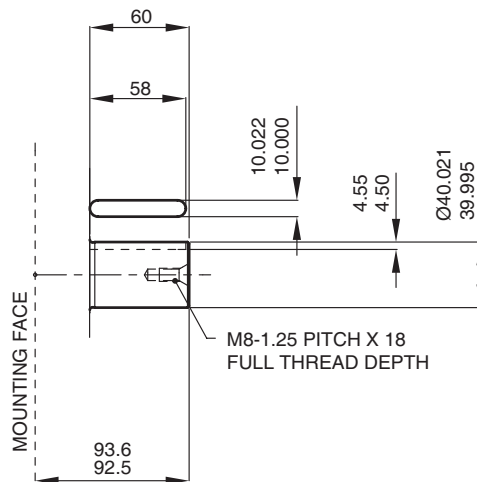

Model
Staffa



Page
31.70

Data Sheet
M-1001/03.00

Installation Drawings

HMB030 motor with rear entry ports (Mono block)

See additional views for side entry model and for shaft types

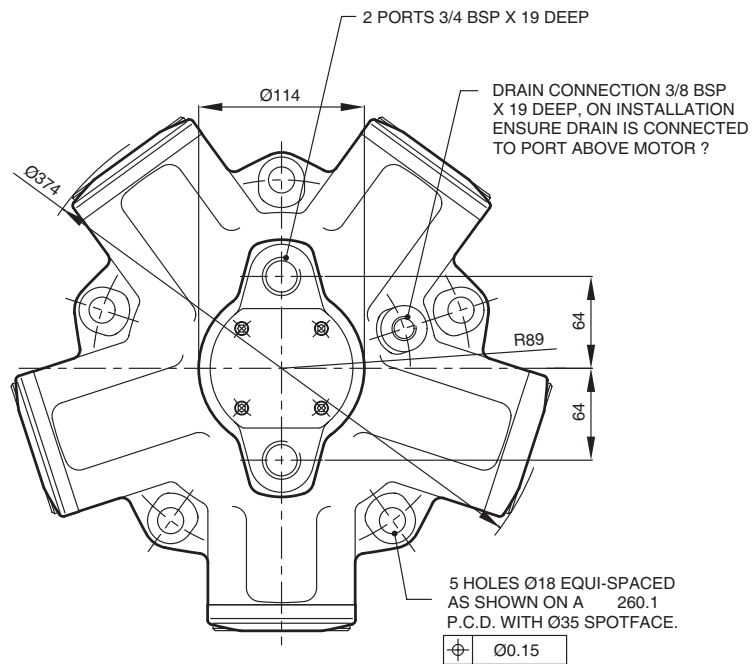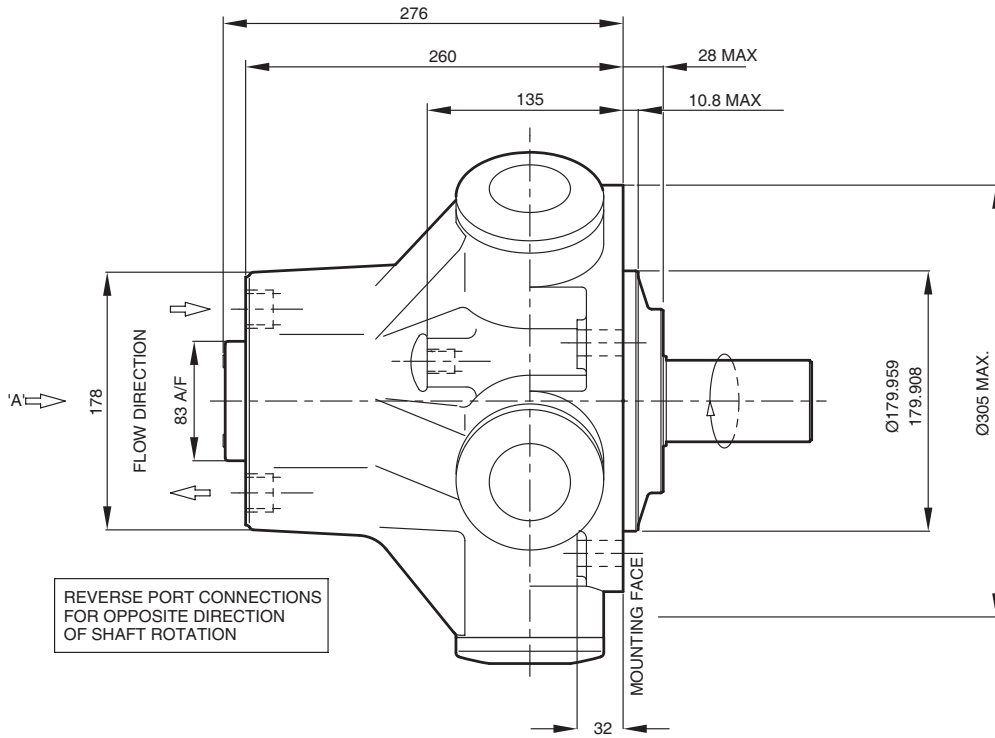

VIEW ON ARROW 'A'



Model
Staffa


Page
32.70

Data Sheet
M-1001/03.00

HMB030 Motor

HMB030 motor with side entry ports (Mono block)

See view of rear entry motor for additional shaft types.

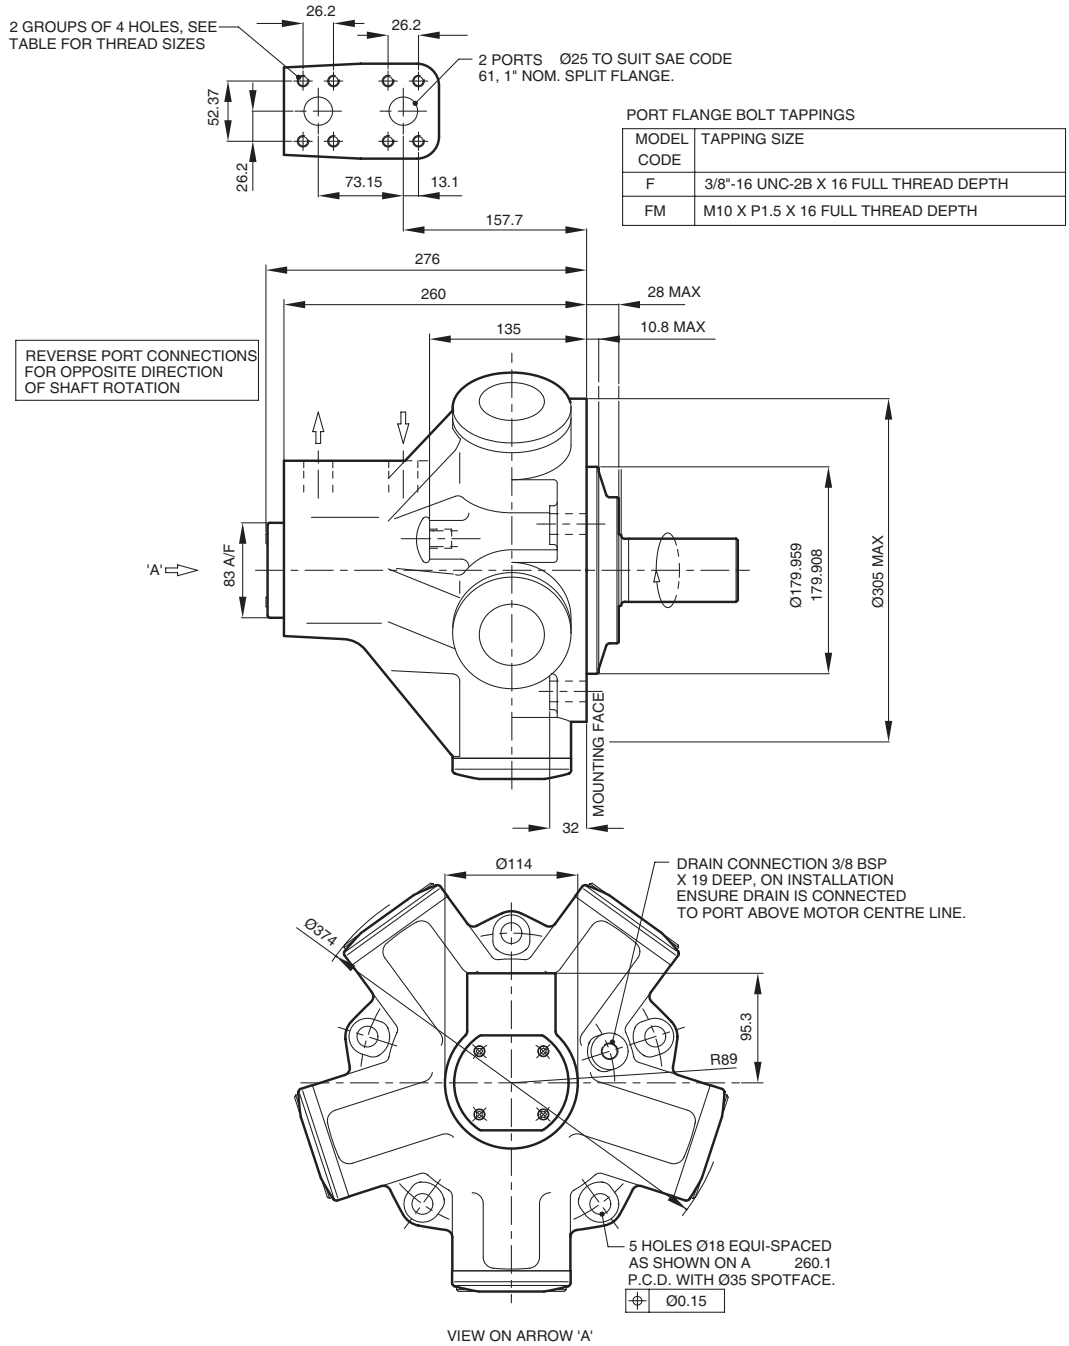

Model Staffa

Page 33.70


Data Sheet M-1001/03.00



Installation Drawing
HMB030 with F3/FM3 Main Port Connections


PORT FLANGE BOLT TAPPINGS

| MODEL CODE | TAPPING SIZE | GAUGE CONNECTIONS |
|------------|--|----------------------------|
| F3 | 7/16"-14 UNC-2B X 27 FULL THREAD DEPTH | 19/16"-18 UNF-2B, SAE J475 |
| FM3 | M12 X P1.75 X 27 FULL THREAD DEPTH | G1/4" (BSPF) |

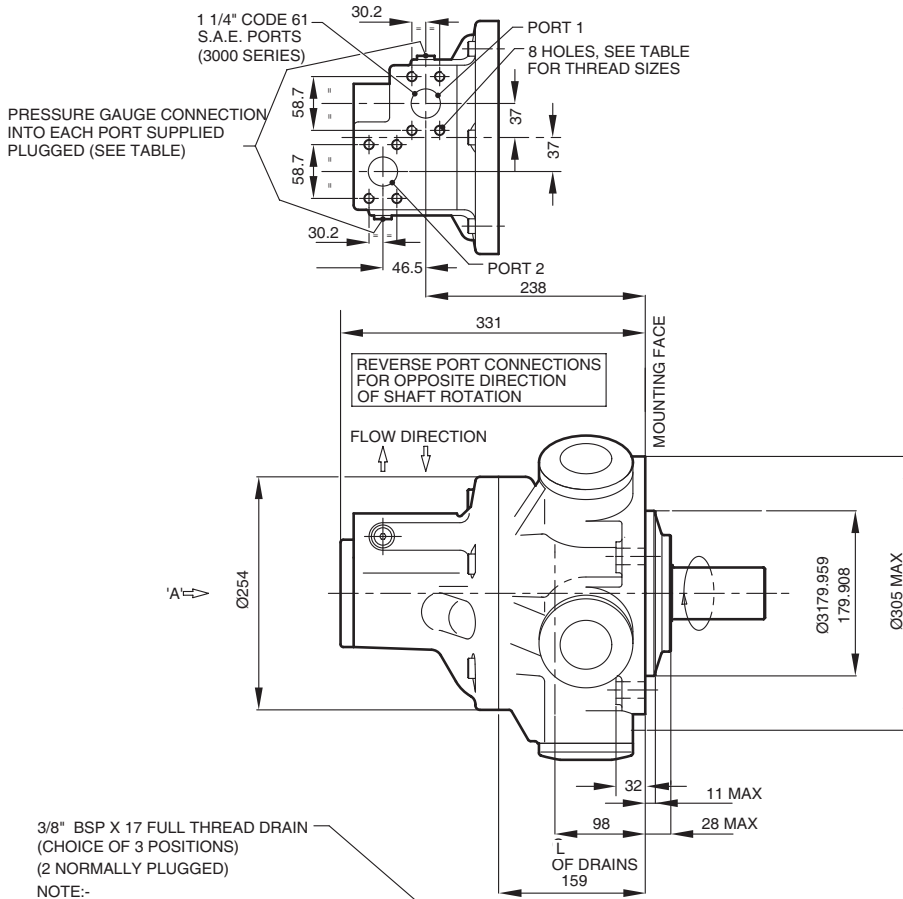

3/8" BSP X 17 FULL THREAD DRAIN (CHOICE OF 3 POSITIONS) (2 NORMALLY PLUGGED)

NOTE:- ENSURE ON INSTALLATION DRAIN IS TAKEN FROM ABOVE MOTOR CENTRE LINE.

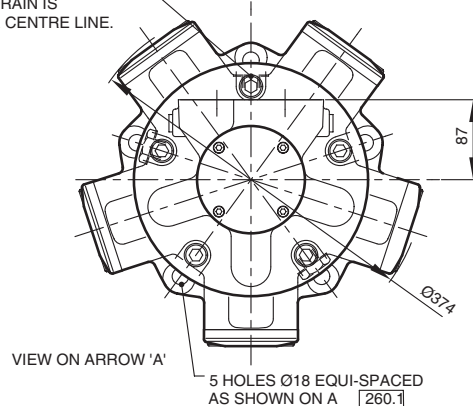

P.C.D. SPOTFACED Ø35
 ±0.15



Model Staffa

Page 34.70

Data Sheet M-1001/03.00

HMB30 Shaft Specification

Shaft Type "P" Parallel keyed shaft


Shaft Type "S" Involute spline, 17 teeth to BS3550

Shaft Type "Z" Involute spline, 17 teeth to DIN 5480

SHAFT TYPE 'S'
17 SPLINES TO BS 3550-1963

SHAFT TYPE 'Z'
17 SPLINES TO DIN 5480

FOR SHAFT TYPE 'Z'
DIN 5480, W55 X 3 X 17 X 7h

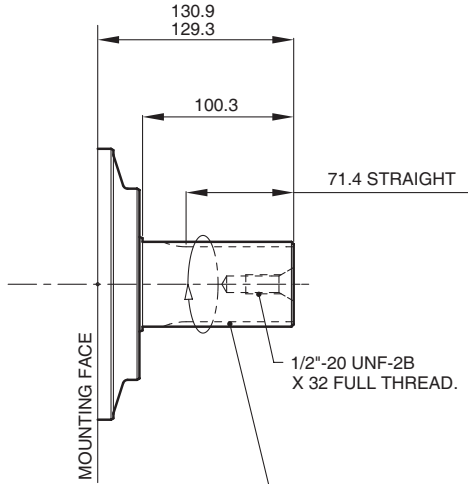


SPLINE DATA

FOR SHAFT TYPE 'S'
TO BS 3550-1963 (ANSI B92.1, 1970 CLASS 5)
FLAT ROOT SIDE FIT, CLASS 1

| | |
|--------------------|---------------|
| PRESSURE ANGLE | 30° |
| NUMBER OF TEETH | 17 |
| PITCH | 8/16 |
| MAJOR DIAMETER | 56.41/56.28 |
| FORM DIAMETER | 50.703 |
| MINOR DIAMETER | 50.07/49.60 |
| PIN DIAMETER | 6.096 |
| DIAMETER OVER PINS | 62.985/62.931 |

**SHAFT TYPE 'P'
CYLINDRICAL SHAFT WITH KEY**

KEY (SUPPLIED):
14.046/14.028 WIDE
9.037/8.961 THICK

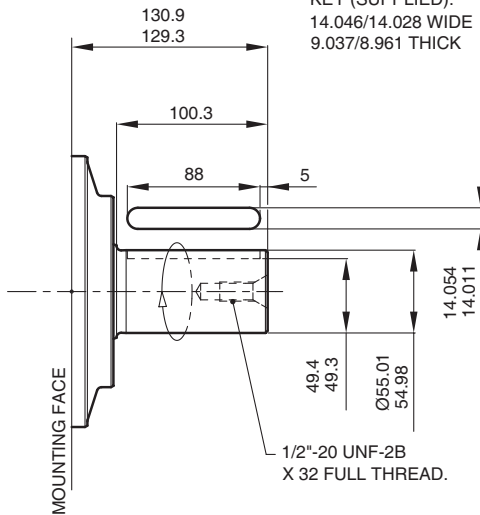


| | | |
|-----------------|---------------|----------------------------|
| Model Staffa | Page 35.70 | Data Sheet M-1001/03.00 |
|-----------------|---------------|----------------------------|


Installation Drawings

HMB045--3* Motor with rear entry ports**
HMB045--D-3* Motor with dual entry ports**

SEE VIEWS FOR ADDITIONAL SHAFT TYPES

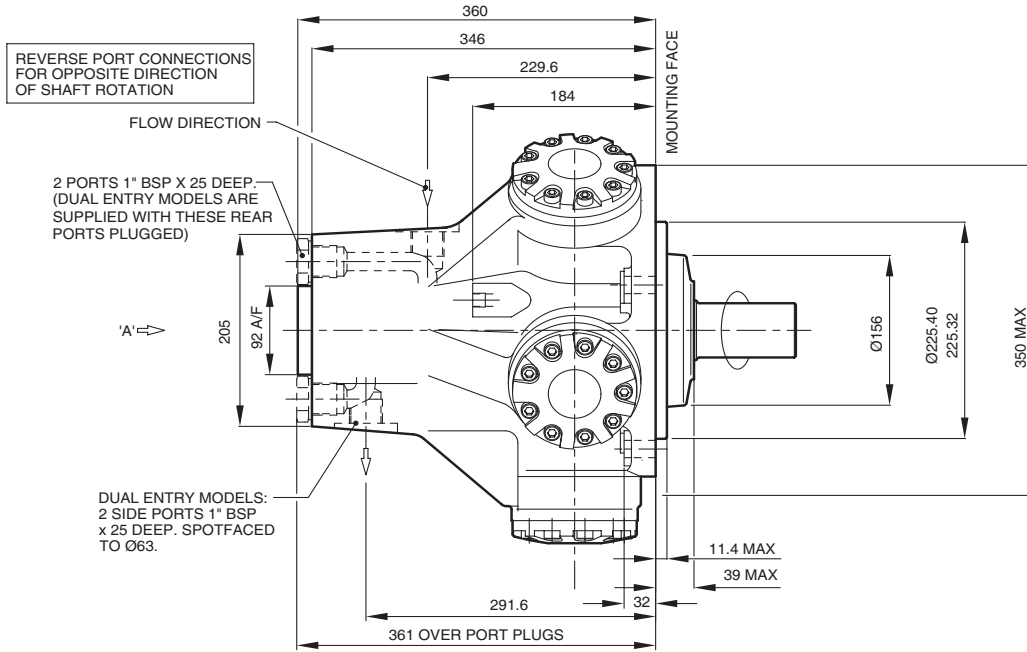

DRAIN CONNECTION 3/8 BSP x 19 DEEP SPOTFACED TO Ø28. CHOICE OF TWO POSITIONS. ONE NORMALLY PLUGGED. ON INSTALLATION ENSURE DRAIN IS CONNECTED TO PORT ABOVE MOTOR C/L

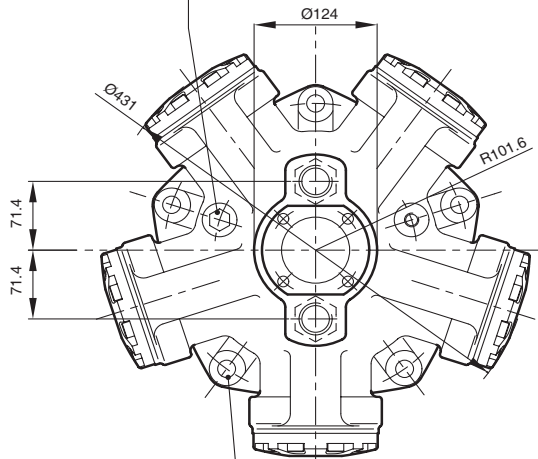

VIEW ON ARROW 'A'



Model
Staffa

Page
36.70


Data Sheet
M-1001/03.00

Installation Drawing

HMB045-FM3 Motor

PORT FLANGE BOLT TAPPINGS

| MODEL CODE | TAPPING SIZE | GAUGE CONNECTIONS |
|------------|--|---------------------------|
| F3 | 7/16"-14 UNC-2B X 27 FULL THREAD DEPTH | 9/16"-18 UNF-2B, SAE J475 |
| FM3 | M12 X P1.75 X 27 FULL THREAD DEPTH | G1/4 (BSPF) |

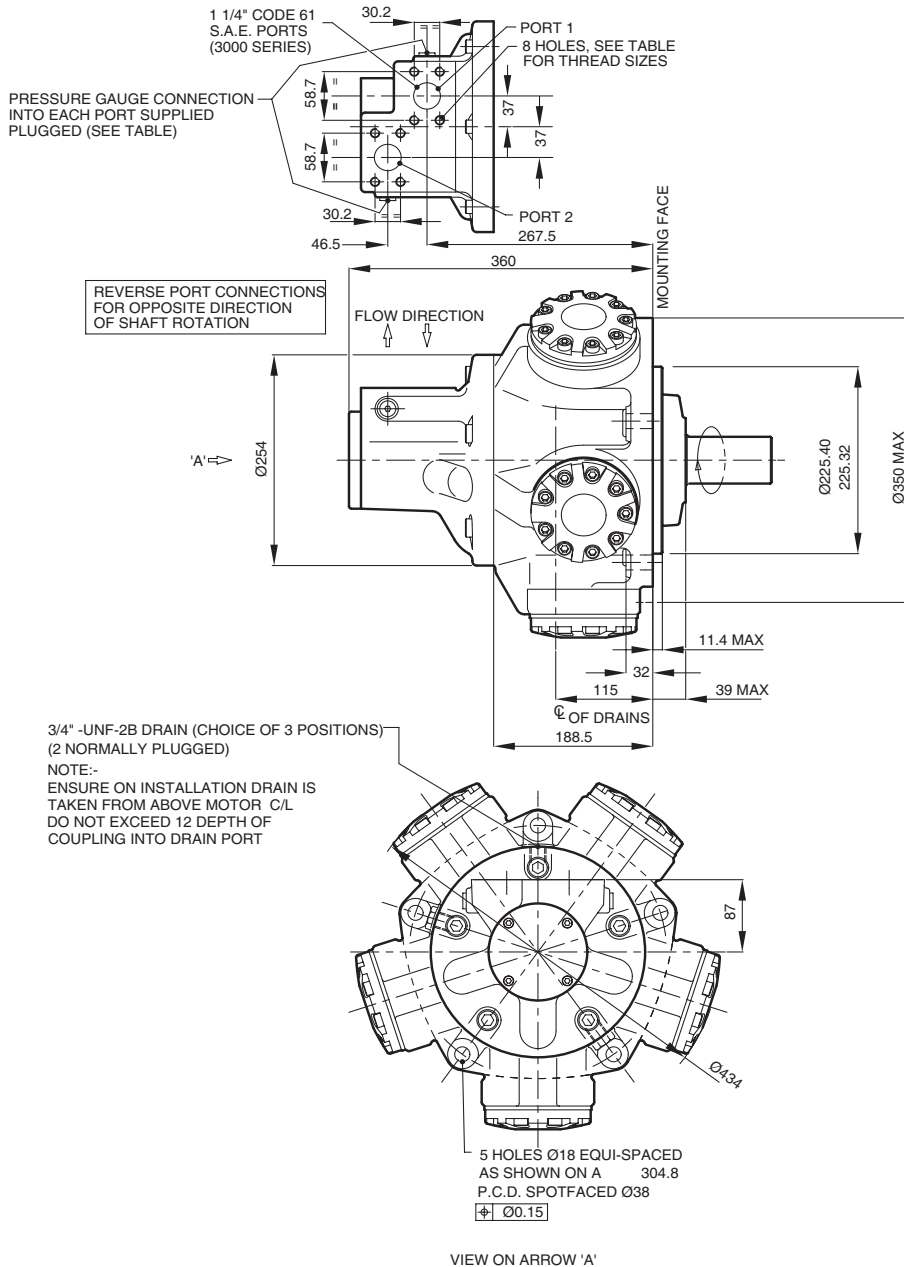

Model
Staffa

Page
37.70

Data Sheet
M-1001/03.00



B045 Shaft Specification

Shaft type "P", Parallel keyed shaft


Shaft type "S", Involute spline, 17 teeth to BS3550

Shaft type "Z", Involute spline to DIN 5480

Shaft type "Q", Internal Involute spline, 21 teeth to BS 3550


B045 SHAFT VARIATIONS

SHAFT TYPE 'P'
CYLINDRICAL SHAFT WITH KEY

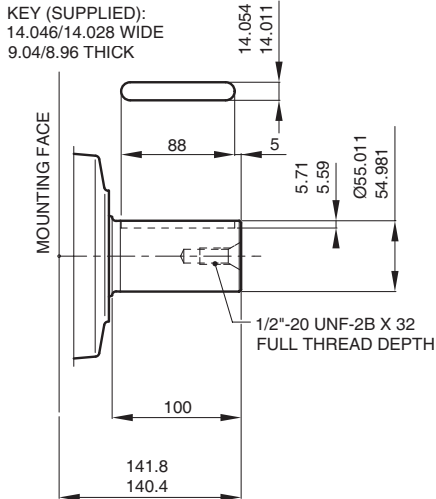

SHAFT TYPES 'S'
17 SPLINES TO BS 3550-1963


SHAFT TYPES 'Z'
17 SPLINES TO DIN 5480

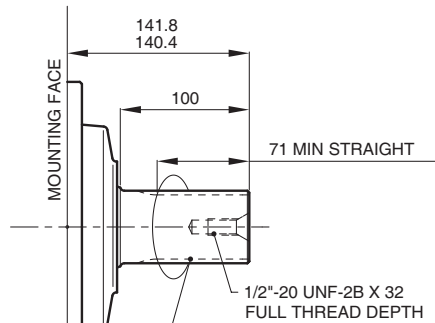

SPLINE DATA

FOR SHAFT TYPE 'S'
TO BS 3550-1963 & ANSI B92.1,1970
FLAT ROOT SIDE FIT, CLASS 1
PRESSURE ANGLE 30°
NUMBER OF TEETH 17
PITCH 8/16
MAJOR DIAMETER 56.41/56.28
FORM DIAMETER 50.703
MINOR DIAMETER 50.07/49.60
PIN DIAMETER 6.096
DIAMETER OVER PINS 62.985/62.931

SHAFT TYPE 'Q'
FEMALE SHAFT WITH 21 SPLINES TO BS 3550

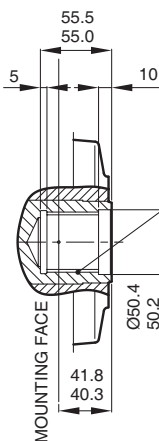

SPLINE DATA


INTERNAL SPLINE TO BS 3550-1963
FLAT ROOT SIDE FIT
PRESSURE ANGLE 30°
NUMBER OF TEETH 21
PITCH 12/24
MAJOR DIAMETER 46.566/46.896
FORM DIAMETER 46.144
MINOR DIAMETER 42.334/42.461
PIN DIAMETER 3.658
PIN FLATTED TO 3.556
DIMENSION BETWEEN PINS 39.169/39.103

FOR SHAFT TYPE 'Z'
DIN 5480, W55 X 3 X 17 X 7h



HMB030/HMB045 Valve Housings

**3" VALVE HOUSING WITH 6-BOLT FLANGE, 'S03'
SUPPLIED WITH 2 'O' RING SEALS**

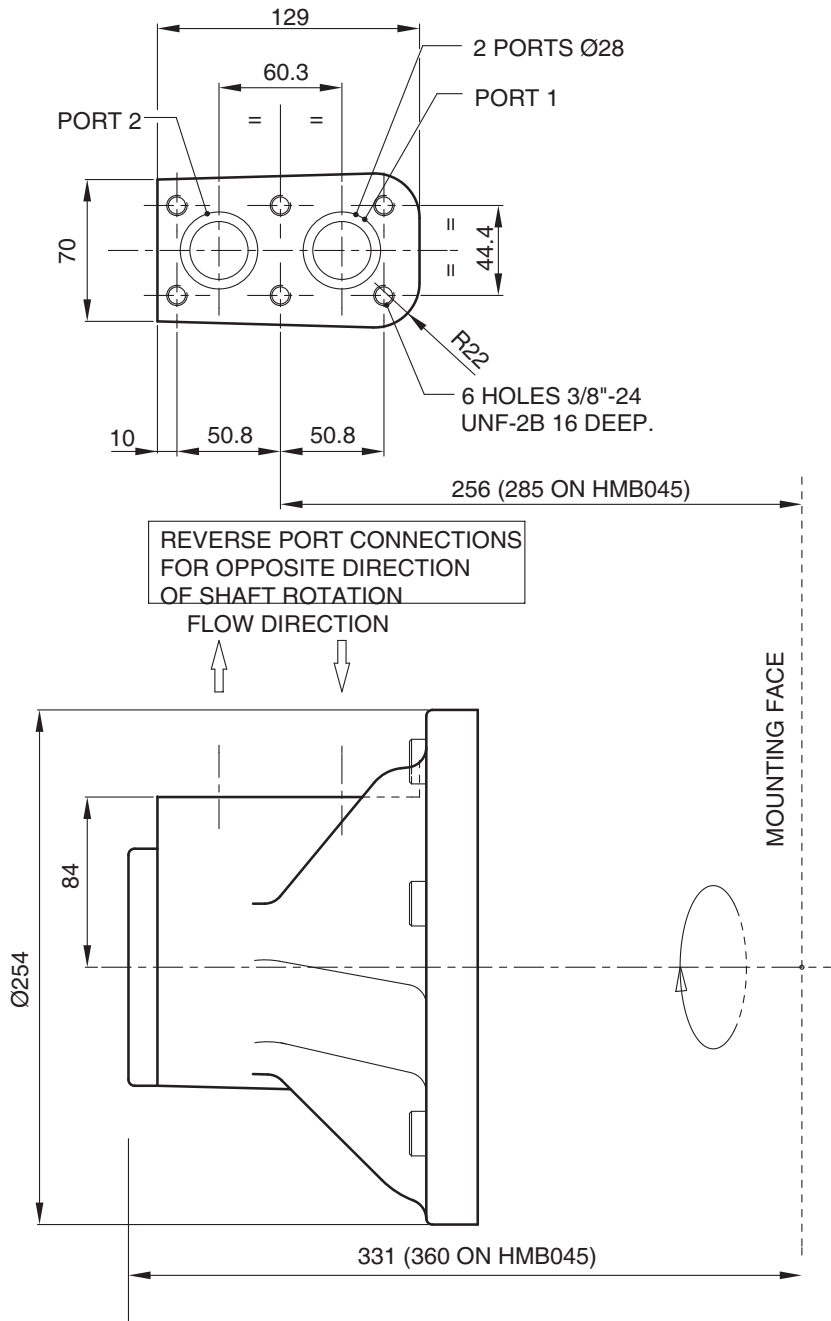

Model
Staffa


Page
39.70

Data Sheet
M-1001/03.00



HMB030/HMB045 Valve Housings (continued)


1" SAE 4-BOLT FLANGE, 'F2'/'FM2'

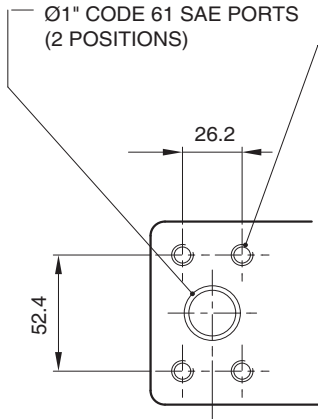

4 HOLES (2 POSITIONS) SEE TABLE FOR BOLT TAPPINGS

PORT FLANGE BOLT TAPPINGS

| MODEL CODE | TAPPING SIZE |
|------------|---------------------------------------|
| F2 | 3/8"-16 UNC-2B X 22 FULL THREAD DEPTH |
| FM2 | M10 X P1.5 X 22 FULL THREAD DEPTH |

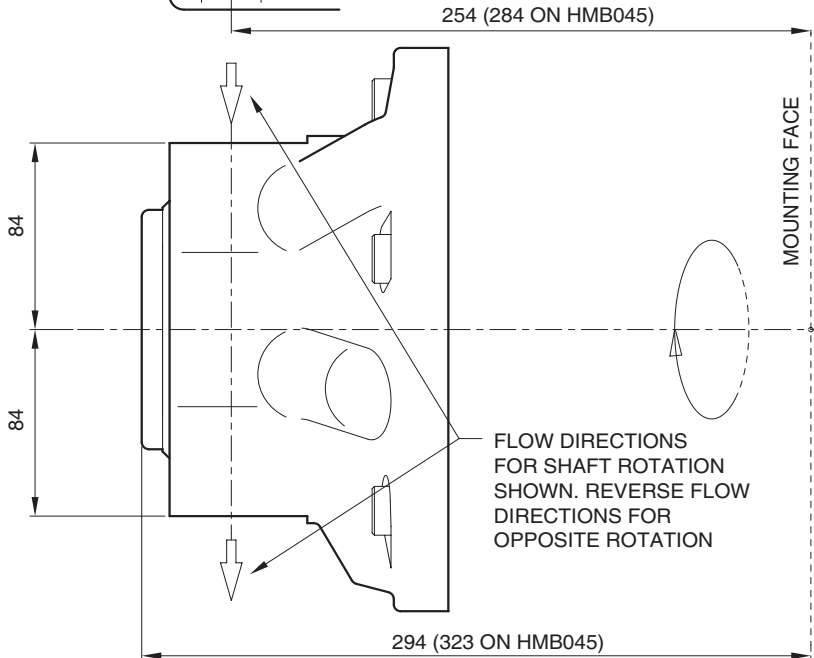


Installation Drawings

HMB060/80 motors with type "F3"/"FM3" (1 1/4" SAE) port connection

See additional views for shaft types and for types "S03" and "S04" port connection.
 See drawing of dual-mount model for details of types "F2" and FM2" port connection.

PORT FLANGE BOLT TAPPINGS

| MODEL CODE | TAPPING SIZE | GAUGE CONNECTIONS |
|------------|--|---------------------------|
| F3 | 7/16"-14 UNC-2B X 27 FULL THREAD DEPTH | 9/16"-18 UNF-2B, SAE J475 |
| FM3 | M12 X P1.75 X 27 FULL THREAD DEPTH | G1/4" (BSPF) |

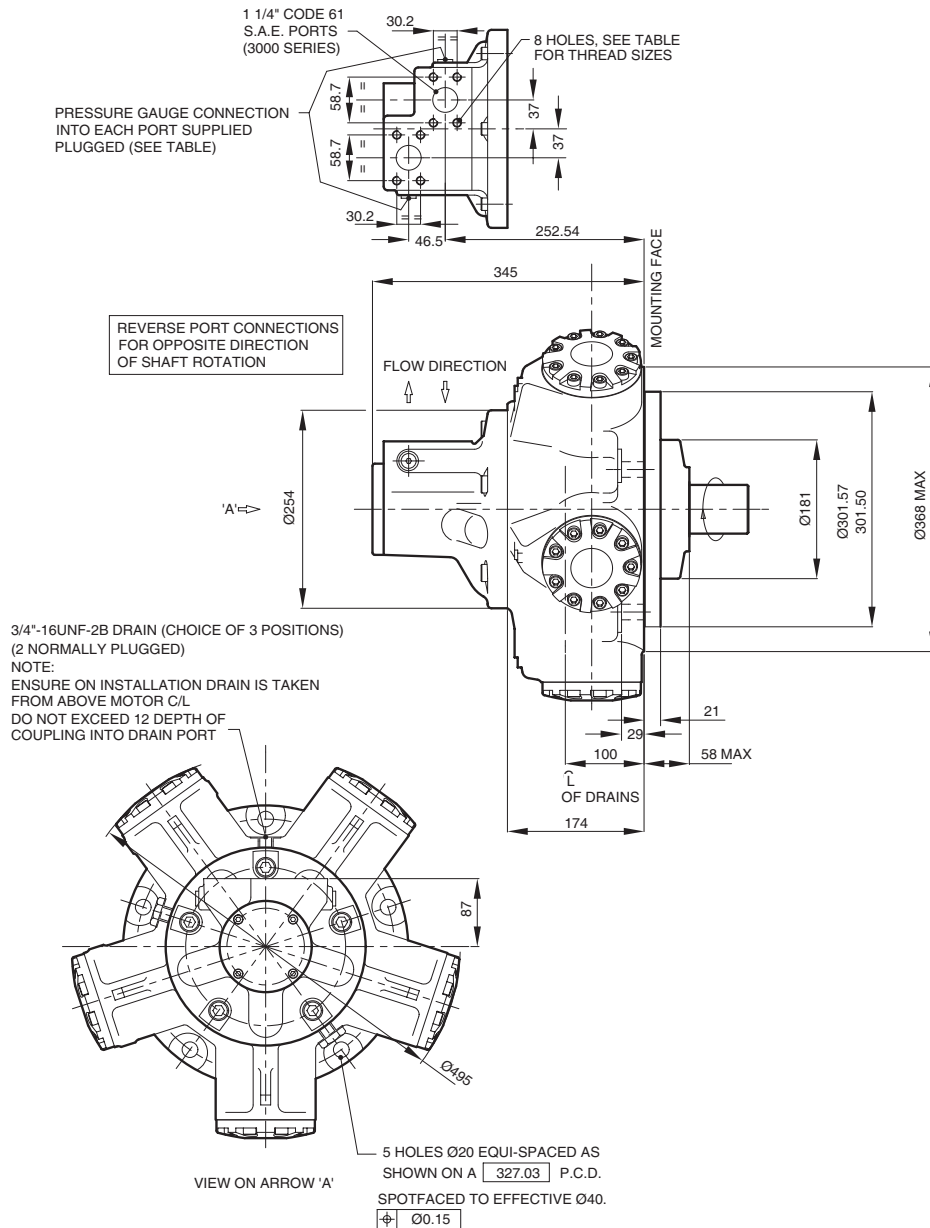

Model
Staffa


Page
41.70

Data Sheet
M-1001/03.00




HMB060/080/100 Shaft Specification


SHAFT TYPES 'P' & 'HP'
CYLINDRICAL SHAFT WITH KEY

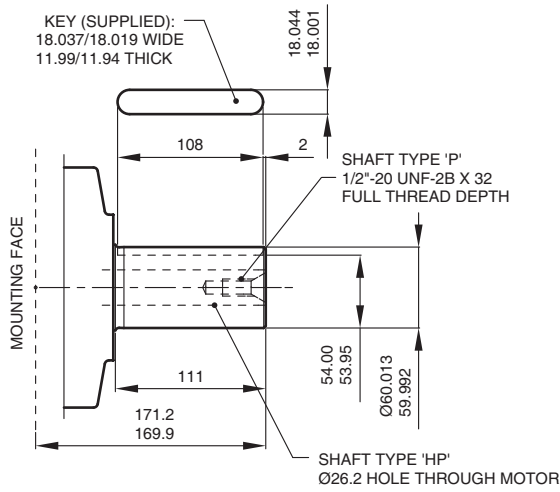

SHAFT TYPE 'X'
SHORT TAPER WITH KEY

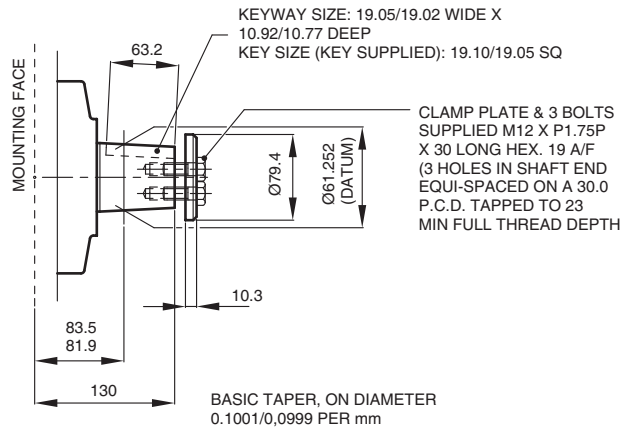


SHAFT TYPE 'T'
LONG TAPER WITH KEY

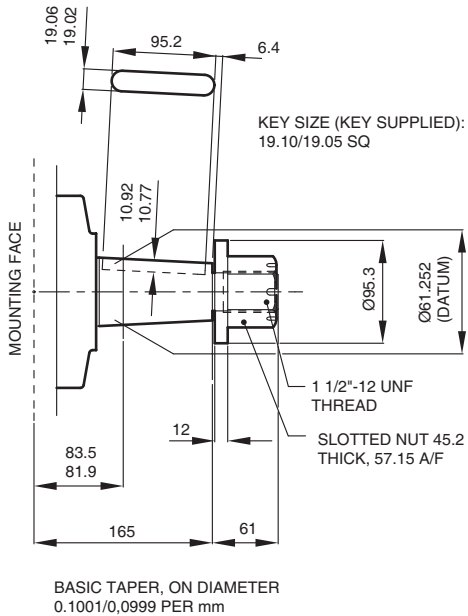

HMB060/080/100 Shaft Specification (continued)

SHAFT TYPES 'S' & 'HS'
14 SPLINES TO BS 3550-1963

SHAFT TYPES 'Z' & 'HZ'
22 SPLINES TO DIN 5480

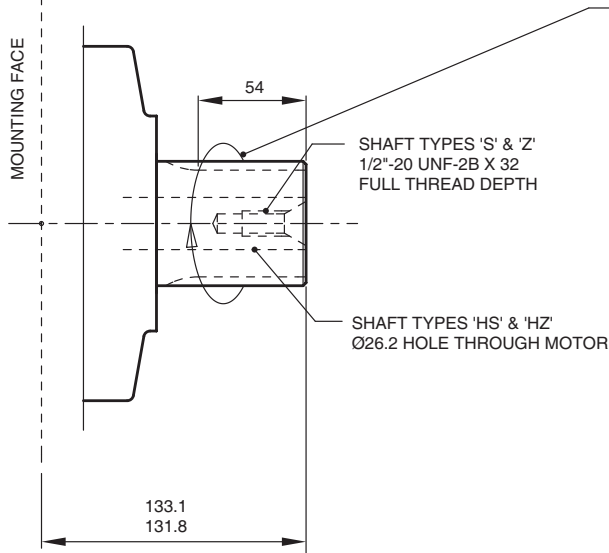


SPLINE DATA

FOR SHAFT TYPES 'S' & 'HS'
TO BS 3550/ANSI B92.1 1970 CLASS 5
FLAT ROOT SIDE FIT, CLASS 1
PRESSURE ANGLE 30°
NUMBER OF TEETH 14
PITCH 6/12
MAJOR DIAMETER 62.553/62.425
FORM DIAMETER 55.052
MINOR DIAMETER 54.084/53.525
PIN DIAMETER 8.128
DIAMETER OVER PINS 71.593/71.544

FOR SHAFT TYPES 'Z' & 'HZ'
DIN 5480 W70 X 3 X 30 X 22 X 7h

SHAFT TYPE 'Q' & 'HQ'
FEMALE SHAFT WITH 24 SPLINES TO BS 3550

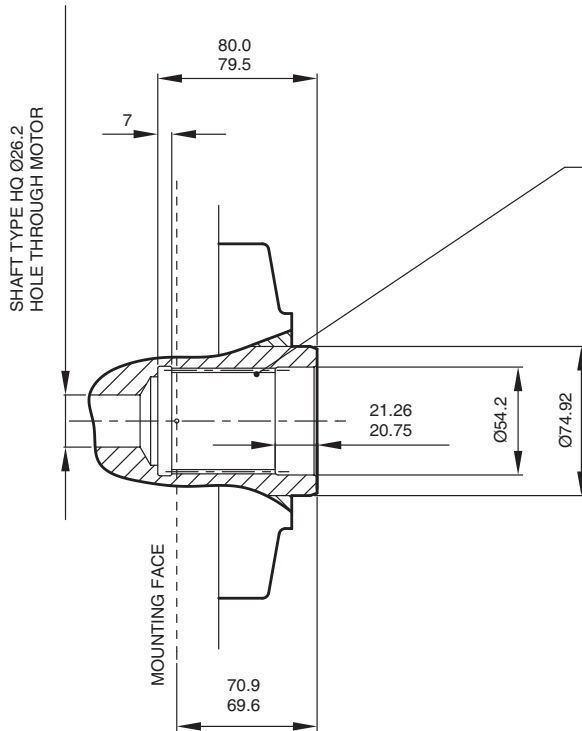

SPLINE DATA

TO BS 3550
FLAT ROOT SIDE FIT, MODIFIED
PRESSURE ANGLE 30°
NUMBER OF TEETH 24
PITCH 12/24
MAJOR DIAMETER 53.246/52.916
MINOR DIAMETER 48.811/48.684
PIN DIAMETER 3.658
PIN FLATTED TO 3.560
DIAMETER BETWEEN PINS 45.626/45.550



Model
Staffa

Page
43.70


Data Sheet
M-1001/03.00

Installation Drawings
HMB125 Motor with type "F3"/FM3 (1 1/4" SAE) Port Connection

SEE VIEWS FOR SHAFT TYPES & 'F2','FM2','S03','S04','F4' & 'FM4' PORT CONNECTION.

PORT FLANGE BOLT TAPPINGS

| MODEL CODE | TAPPING SIZE | GAUGE CONNECTIONS |
|------------|--|---------------------------|
| F3 | 7/16"-14 UNC-2B X 27 FULL THREAD DEPTH | 9/16"-18 UNF-2B, SAE J475 |
| FM3 | M12 X P1.75 X 27 FULL THREAD DEPTH | G1/4" (BSPF) |

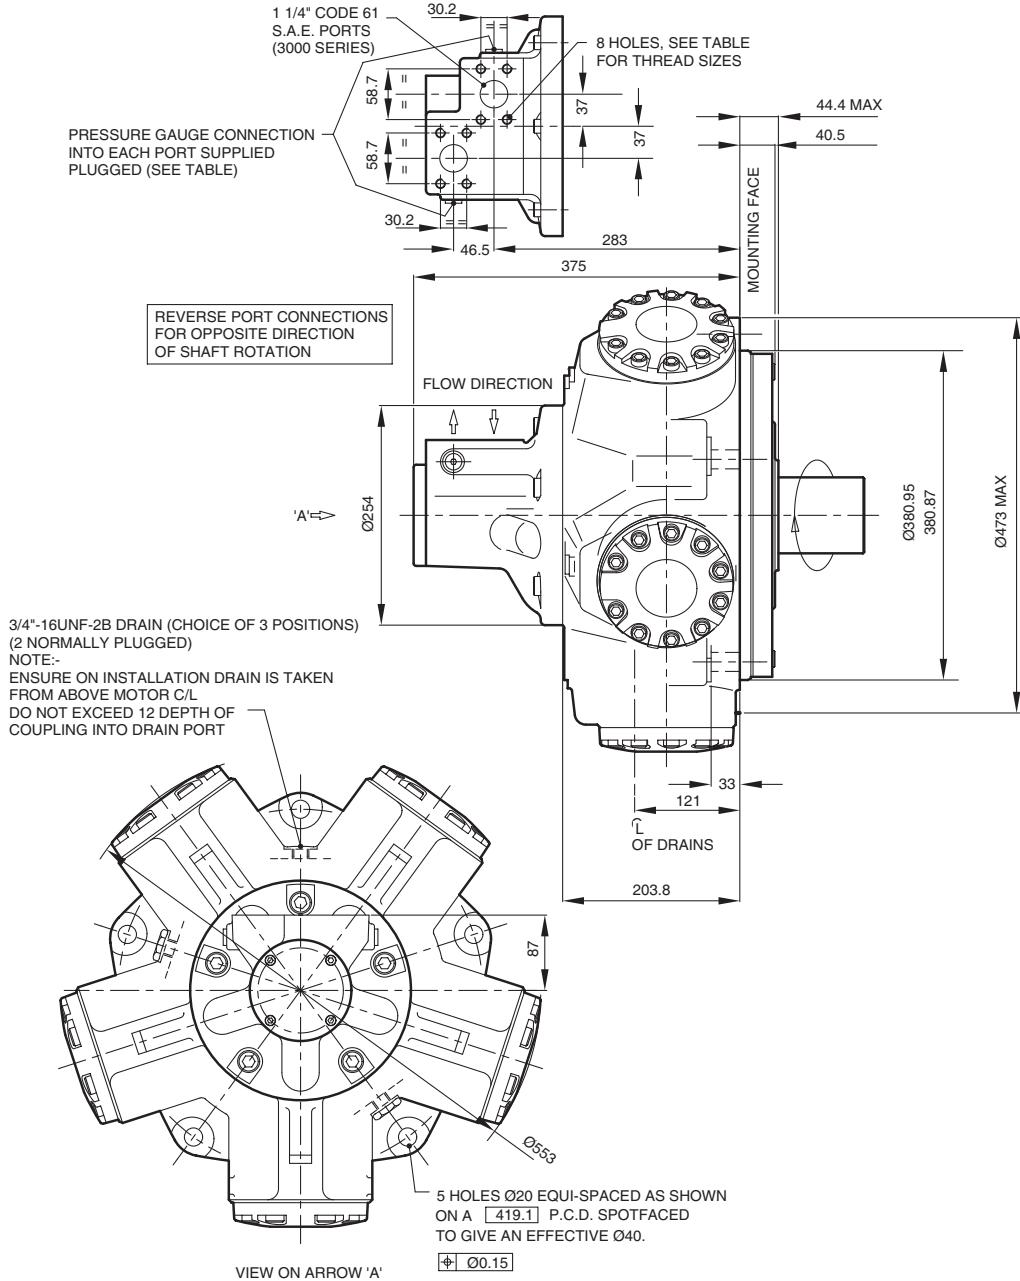

Model
Staffa

Page
44.70


Data Sheet
M-1001/03.00

Installation Drawings
HDB125 Motor with type "F3"/FM3 (1 1/4" SAE) Port Connection

SEE VIEWS FOR SHAFT TYPES & 'F2', 'FM2', 'S03', 'S04', 'F4' & 'FM4' PORT CONNECTION.

PORT FLANGE BOLT TAPPINGS

| MODEL CODE | TAPPING SIZE | GAUGE CONNECTIONS |
|------------|--|---------------------------|
| F3 | 7/16"-14 UNC-2B X 27 FULL THREAD DEPTH | 9/16"-18 UNF-2B, SAE J475 |
| FM3 | M12 X P1.75 X 27 FULL THREAD DEPTH | G1/4" (BSPF) |

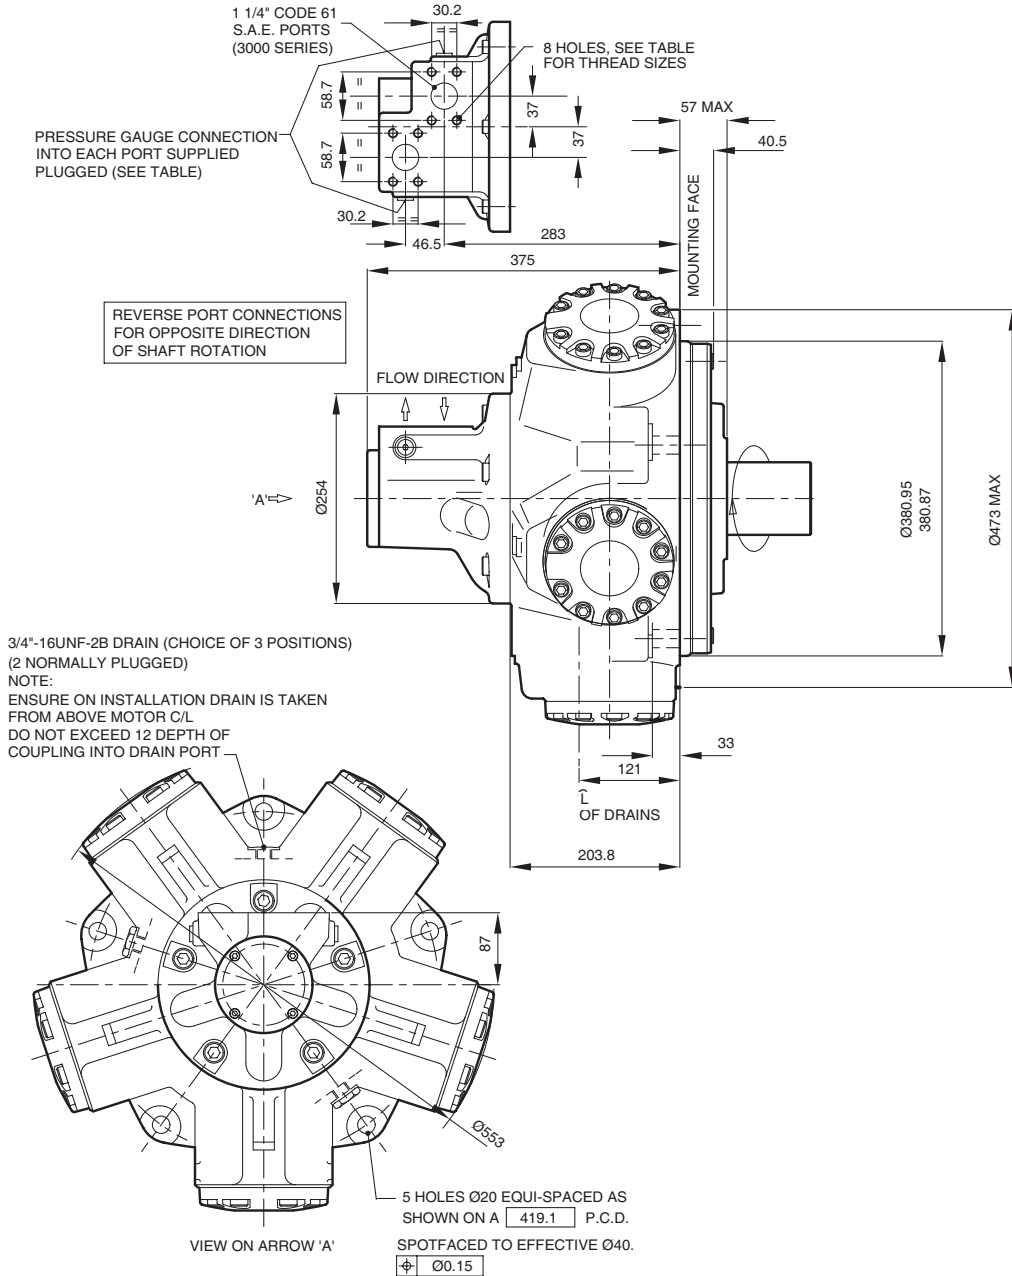


Model
Staffa

Page
45.70

Data Sheet
M-1001/03.00



Motor HMB125 Shaft Specification

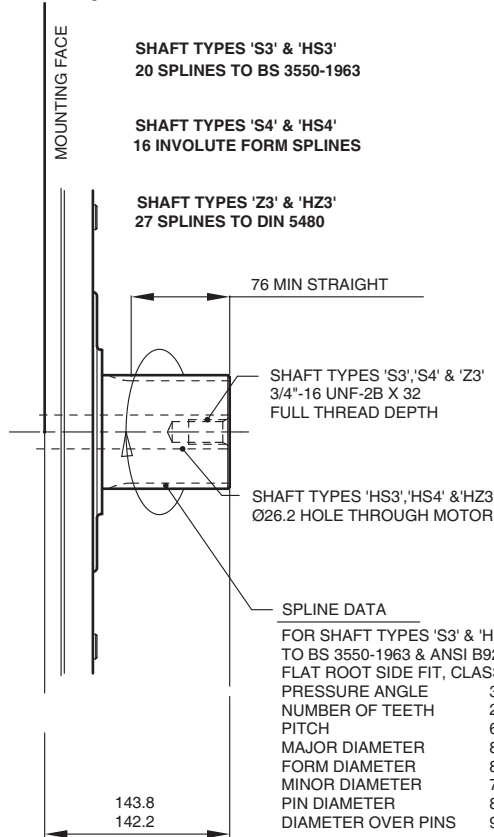

SPLINE DATA


FOR SHAFT TYPES 'S3' & 'HS3'
TO BS 3550-1963 & ANSI B92.1, 1970
FLAT ROOT SIDE FIT, CLASS 1
PRESSURE ANGLE 30°
NUMBER OF TEETH 20
PITCH 6/12
MAJOR DIAMETER 87.953/87.825
FORM DIAMETER 80.264
MINOR DIAMETER 79.485/78.925
PIN DIAMETER 8.128
DIAMETER OVER PINS 97.084/97.030

SPLINE DATA

FOR SHAFT TYPES 'S4' & 'HS4'
INVOLUTE GEAR TOOTH FORM
PRESSURE ANGLE 20°
NUMBER OF TEETH 16
PITCH 5/10
MAJOR DIAMETER 86.360/86.233
FORM DIAMETER 76.124
MINOR DIAMETER 74.93/72.39
PIN DIAMETER 8.636
DIAMETER OVER PINS 92.710/92.581

FOR SHAFT TYPES 'Z3' & 'HZ3'
DIN 5480 W85 X 3 X 27 X 7H


**SHAFT TYPE 'T'
LONG TAPER WITH KEY**

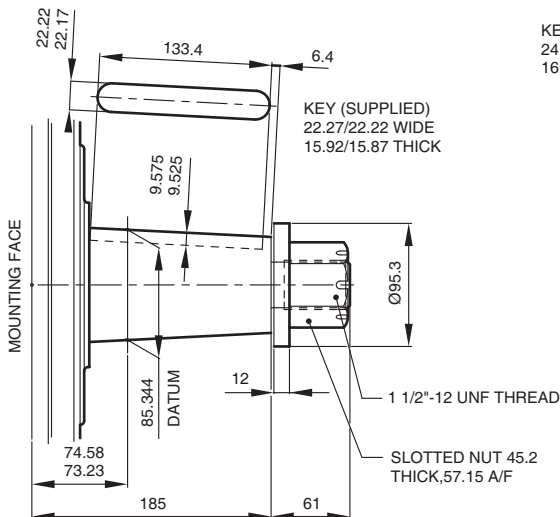

BASIC TAPER, ON DIAMETER
0.1001/0.0999 PER mm


**SHAFT TYPES 'P1' & 'HP1'
CYLINDRICAL SHAFT WITH KEY**

KEY (SUPPLIED)
24.066/24.000 WIDE
16.05/16.00 THICK

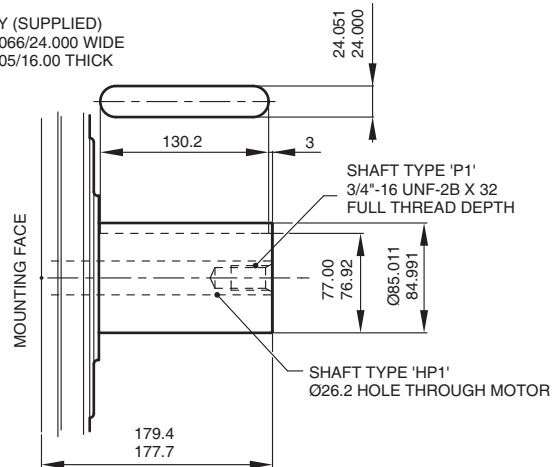


Motor HDB125 Shaft Specification

SHAFT TYPES 'S5' & 'HS5'
23 SPLINES TO BS 3550-1963

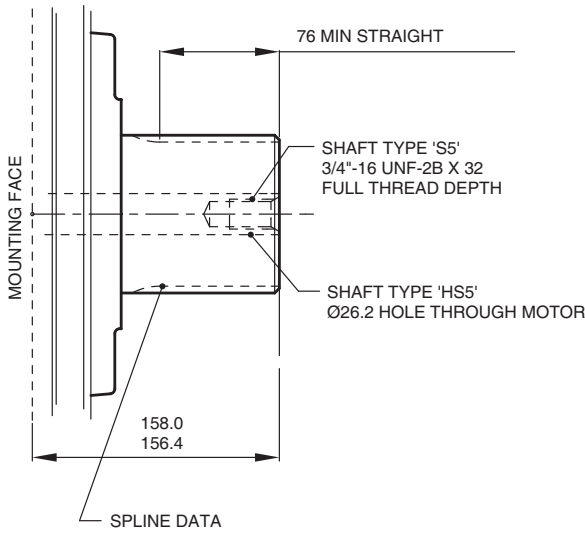


| | |
|-----------------------------------|-----------------|
| FOR SHAFT TYPES 'S5' & 'HS5' | |
| TO BS 3550-1963 & ASA, B5.15-1960 | |
| FLAT ROOT SIDE FIT, CLASS 1 | |
| PRESSURE ANGLE | 30° |
| NUMBER OF TEETH | 23 |
| PITCH | 6/12 |
| MAJOR DIAMETER | 100.652/100.526 |
| FORM DIAMETER | 92.939 |
| MINOR DIAMETER | 92.184/91.626 |
| PIN DIAMETER | 8.128 |
| DIAMETER OVER PINS | 109.573/109.517 |

SHAFT TYPES 'S3' & 'HS3'
20 SPLINES TO BS 3550-1963

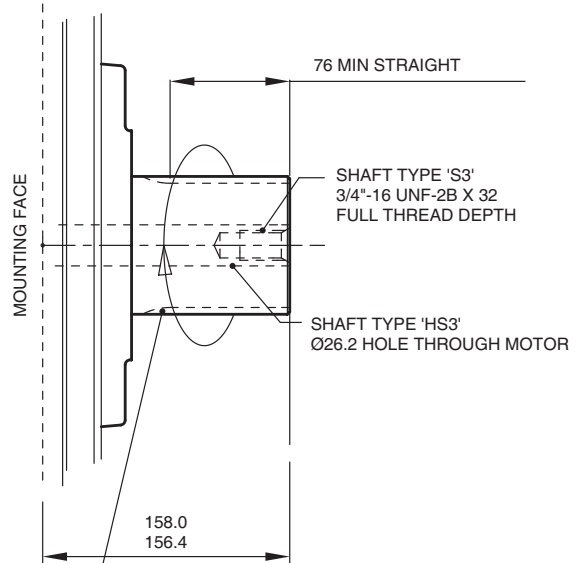


| | |
|-----------------------------------|---------------|
| FOR SHAFT TYPES 'S3' & 'HS3' | |
| TO BS 3550-1963 & ASA, B5.15-1960 | |
| FLAT ROOT SIDE FIT, CLASS 1 | |
| PRESSURE ANGLE | 30° |
| NUMBER OF TEETH | 20 |
| PITCH | 6/12 |
| MAJOR DIAMETER | 87.953/87.825 |
| FORM DIAMETER | 80.264 |
| MINOR DIAMETER | 79.485/78.925 |
| PIN DIAMETER | 8.128 |
| DIAMETER OVER PINS | 97.084/97.030 |

SHAFT TYPES 'Z5' & 'HZ5'
24 SPLINES TO DIN 5480

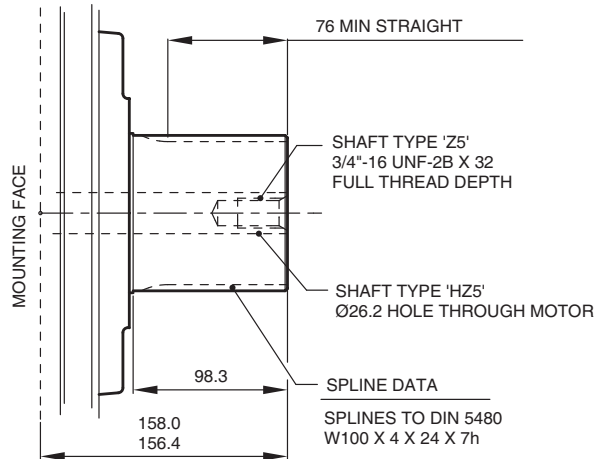


Motor HDB125 Shaft Specification (continued)

**SHAFT TYPES 'P1' & 'HP1'
CYLINDRICAL SHAFT WITH KEY**

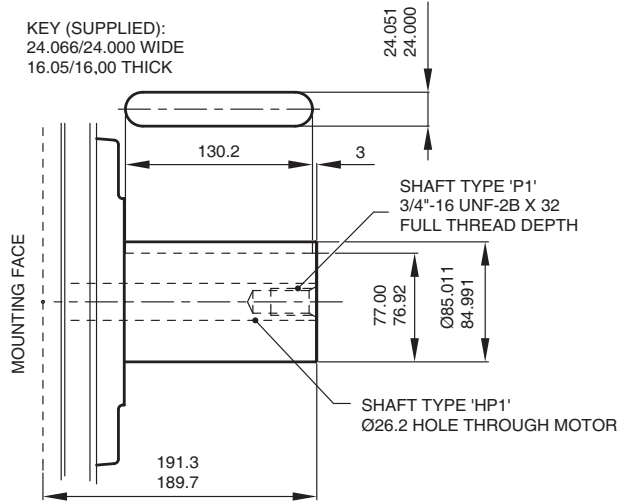


**SHAFT TYPE 'Q' & 'HQ'
FEMALE SHAFT WITH 34 SPLINES TO BS 3550**

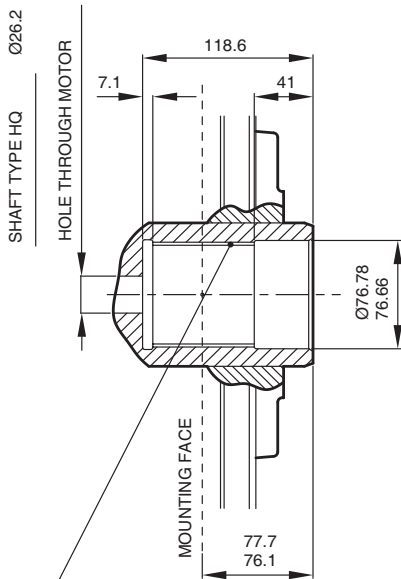

SPLINE DATA


| | |
|----------------------------------|---------------|
| TO BS 3550-1963 & ASA,B5.15-1960 | |
| FLAT ROOT SIDE FIT, | 30° |
| PRESSURE ANGLE | |
| NUMBER OF TEETH | 34 |
| PITCH | 12/24 |
| MAJOR DIAMETER | 74.414/74.084 |
| MINOR DIAMETER | 69.977/69.850 |
| PIN DIAMETER | 3.658 |
| PIN FLATTED TO | 3.556 |
| DIAMETER BETWEEN PINS | 66.815/66.744 |

**SHAFT TYPES 'P2' & 'HP2'
CYLINDRICAL SHAFT WITH KEY**

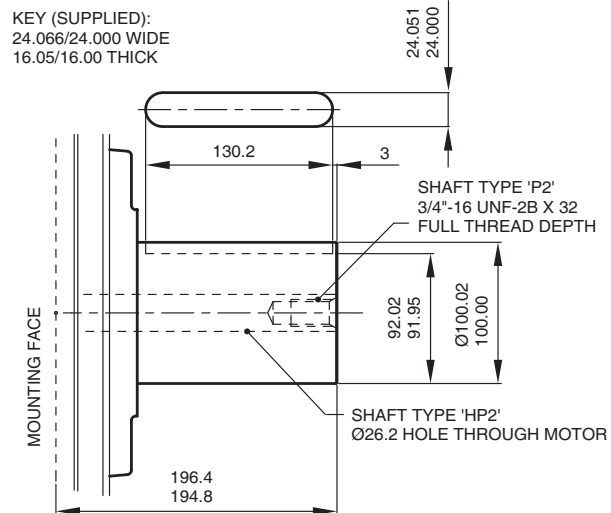


Motor HDB125 Shaft Specification (continued)

**SHAFT TYPE 'X' & 'HX'
SHORT TAPER WITH KEY**

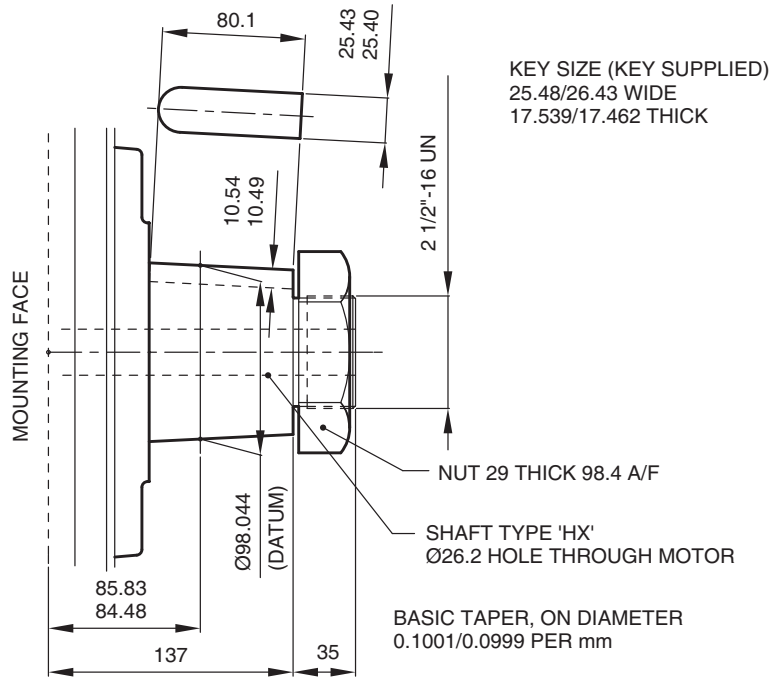

**SHAFT TYPE 'T'
LONG TAPER WITH KEY**

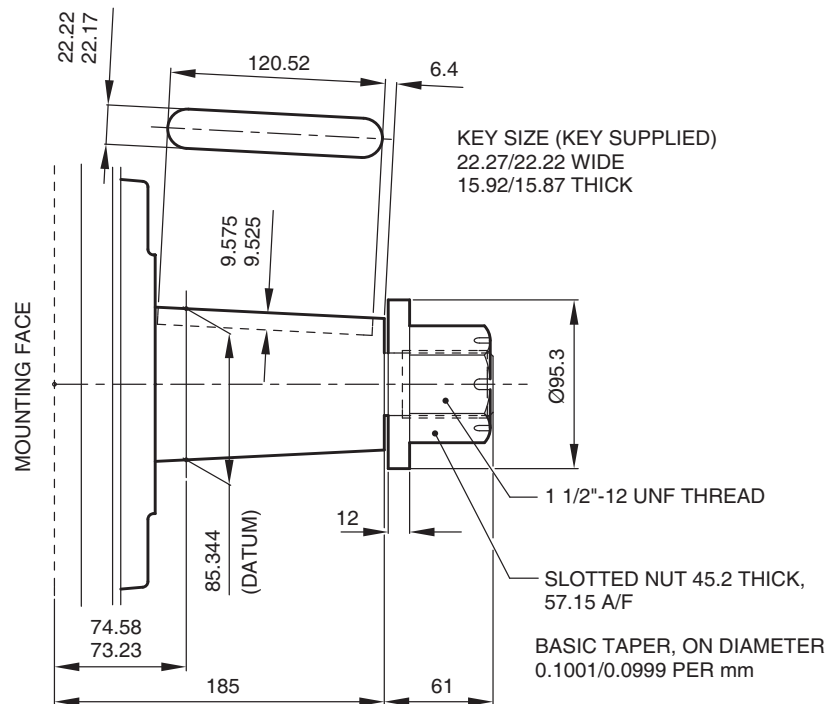


Model
Staffa

Page
49.70


Data Sheet
M-1001/03.00

Motor HMB125/HDB125 Valve Housings

**3" VALVE HOUSING WITH 6-BOLT FLANGE, 'S03'
SUPPLIED WITH 2 'O' RING SEALS**

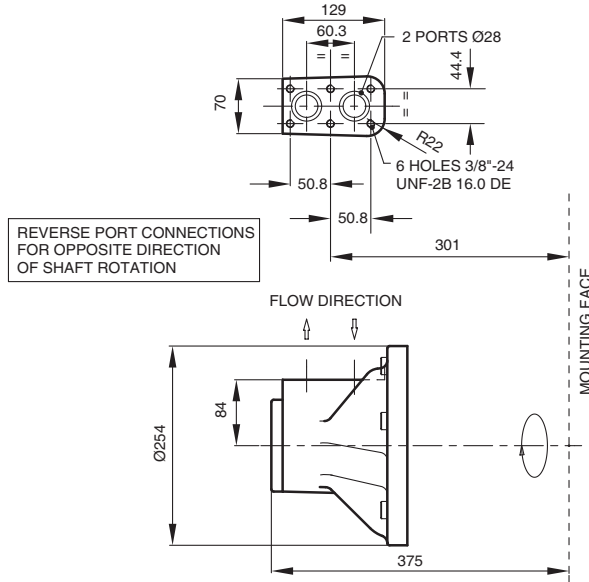

**4" VALVE HOUSING WITH 1 1/2" SAE 4-BOLT FLANGES, 'F4'/FM4'
IN MODEL CODE POSITION 4**

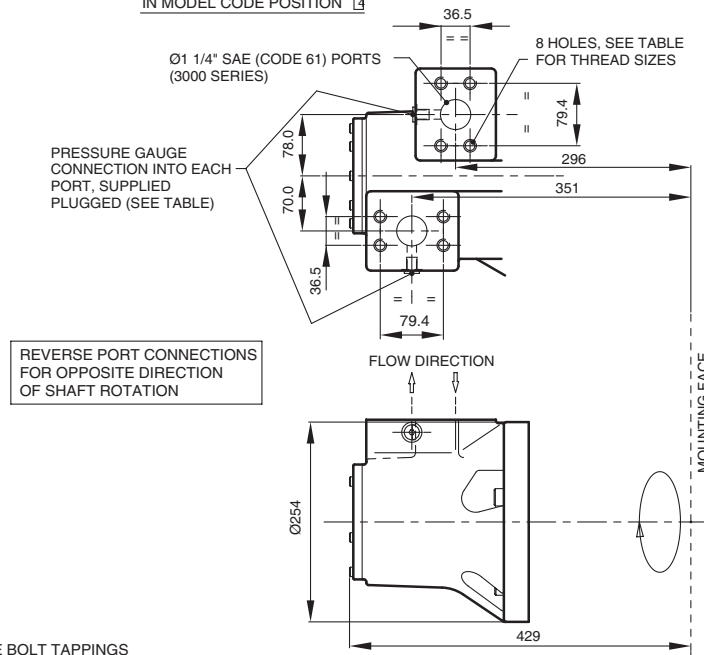


PORT FLANGE BOLT TAPPINGS

| MODEL CODE | TAPPING SIZE | GAUGE CONNECTIONS |
|------------|---------------------------------------|---------------------------|
| F4 | 5/8"-11 UNC-2B X 35 FULL THREAD DEPTH | 9/16"-18 UNF-2B, SAE J475 |
| FM4 | M16 X P2 X 35 FULL THREAD DEPTH | G1/4" (BSPF) |




Motor HMB125/HDB125 Valve Housings (continued)

**4" VALVE HOUSING WITH 6-BOLT FLANGE, 'S04'
SUPPLIED WITH 2 'O' RING SEALS**

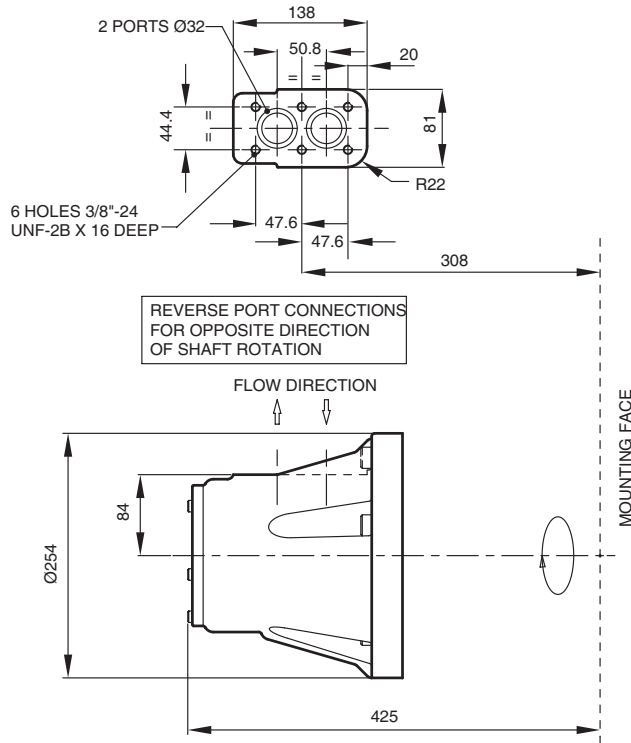

2 1/4" VALVE HOUSING WITH 1" SAE 4-BOLT FLANGES, F2'/FM2'

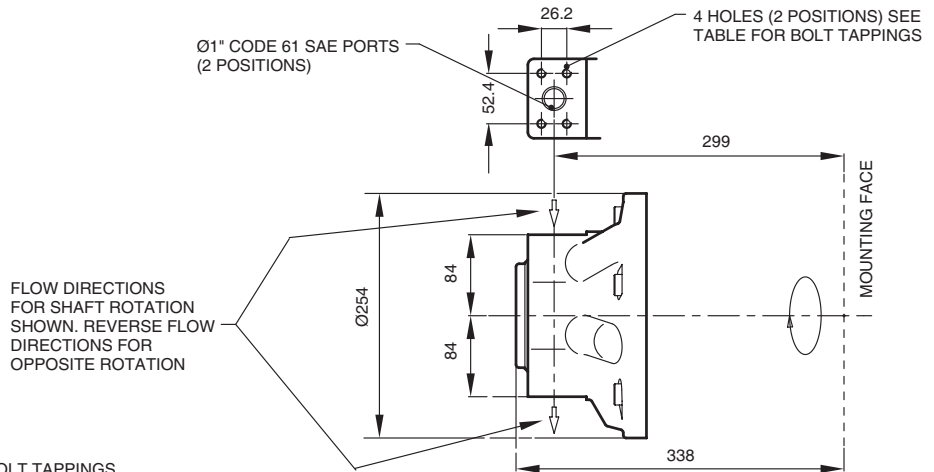

PORT FLANGE BOLT TAPPINGS

| MODEL CODE | TAPPING SIZE |
|------------|---------------------------------------|
| F2 | 3/8"-16 UNC-2B X 22 FULL THREAD DEPTH |
| FM2 | M10 X P1.5 X 22 FULL THREAD DEPTH |




Installation Drawings

HMB150/200 Motors with type "F4"/"FM4" (1 1/2" SAE) port connection


See additional views for shaft types and for types "S04", "F3", "FM3" and "S03" port connection

PORT FLANGE BOLT TAPPINGS

| MODEL CODE | TAPPING SIZE | GAUGE CONNECTIONS |
|------------|---------------------------------------|---------------------------|
| F4 | 5/8"-11 UNC-2B X 35 FULL THREAD DEPTH | 9/16"-18 UNF-2B, SAE J475 |
| FM4 | M16 X P2.0 X 35 FULL THREAD DEPTH | G1/4" (BSPF) |

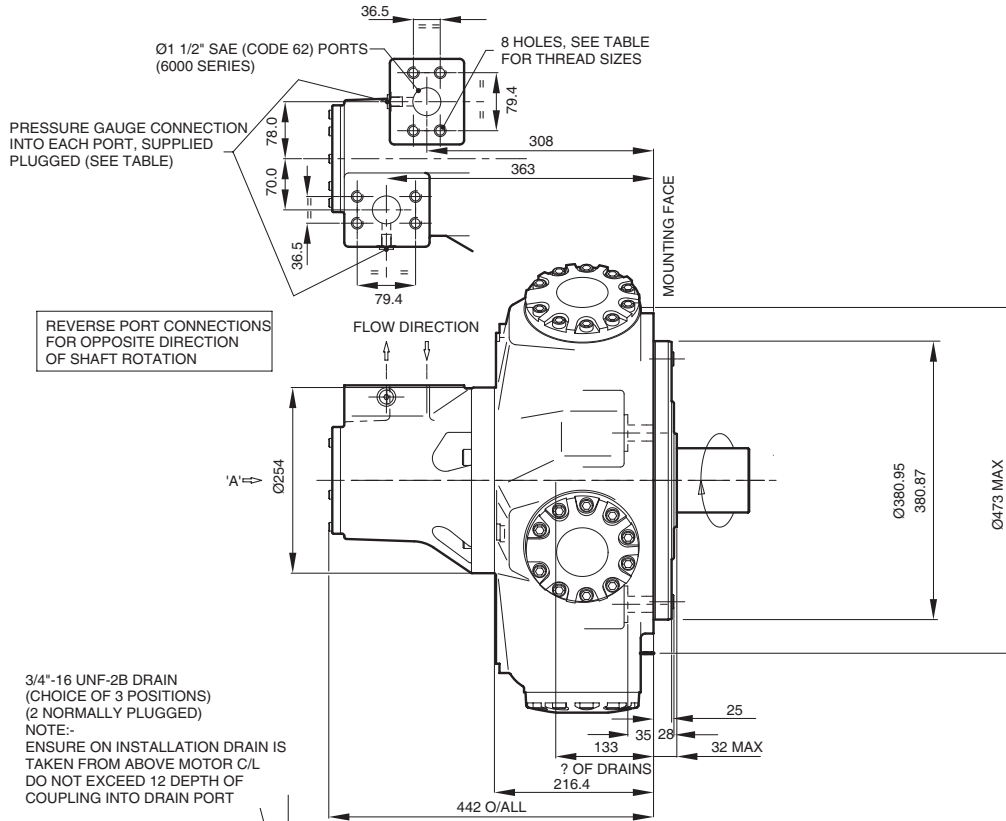

3/4"-16 UNF-2B DRAIN (CHOICE OF 3 POSITIONS) (2 NORMALLY PLUGGED)
NOTE: ENSURE ON INSTALLATION DRAIN IS TAKEN FROM ABOVE MOTOR C/L DO NOT EXCEED 12 DEPTH OF COUPLING INTO DRAIN PORT

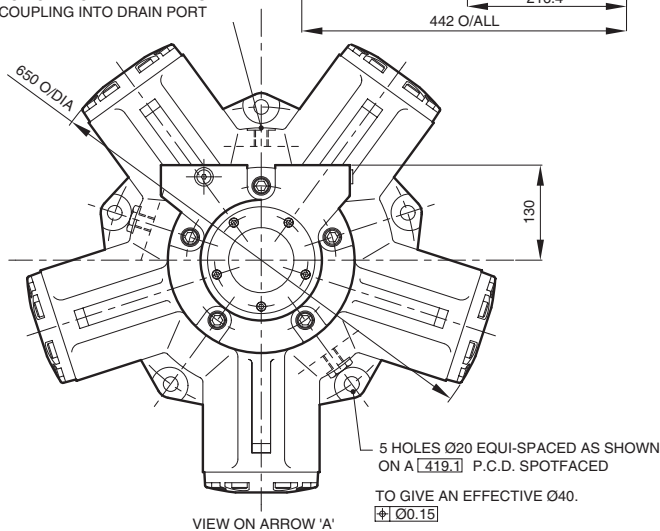

VIEW ON ARROW 'A'




Installation Drawings

HMHDB 150/200 Motors with type "F4"/...(1 1/2" SAE) Port Connection

SEE VIEWS FOR SHAFT TYPES & 'F2','FM2','F3','FM3','S03' & 'S04' PORT CONNECTION.

PORT FLANGE BOLT TAPPINGS

| MODEL CODE | TAPPING SIZE | GAUGE CONNECTIONS |
|------------|---------------------------------------|---------------------------|
| F4 | 5/8"-11 UNC-2B X 35 FULL THREAD DEPTH | 9/16"-18 UNF-2B, SAE J475 |
| FM4 | M16 X P2.0 X 35 FULL THREAD DEPTH | G1/4" (BSPF) |

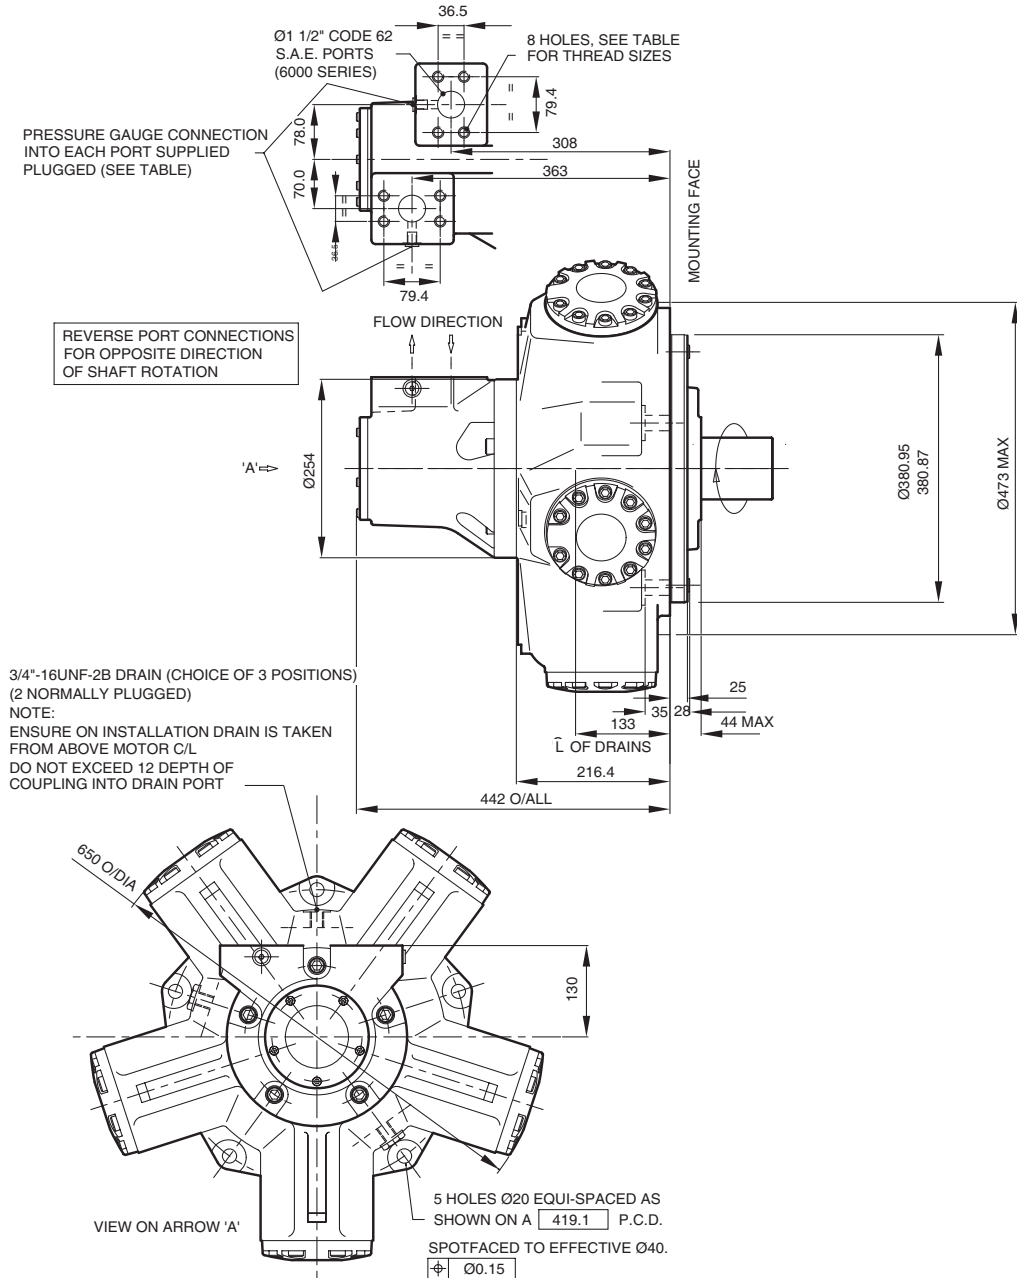


Model
Staffa

Page
53.70

Data Sheet
M-1001/03.00

HMB150 Shaft Specification

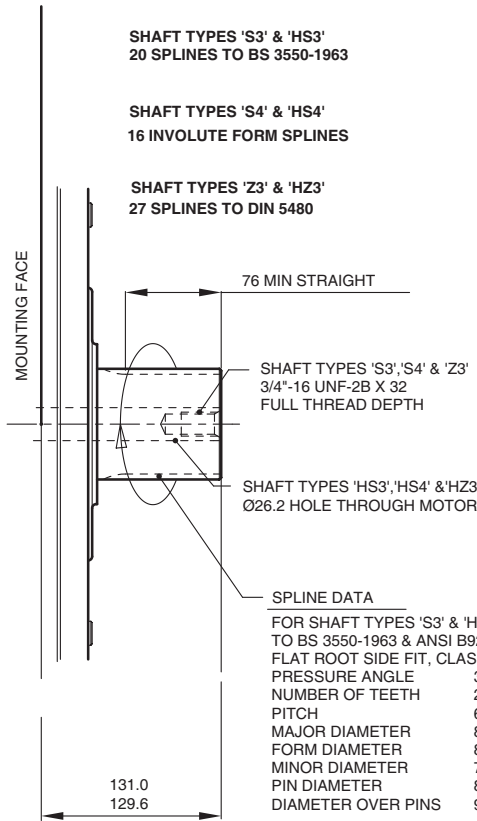

SHAFT TYPES 'S3' & 'HS3'
20 SPLINES TO BS 3550-1963

SHAFT TYPES 'S4' & 'HS4'
16 INVOLUTE FORM SPLINES

SHAFT TYPES 'Z3' & 'HZ3'
27 SPLINES TO DIN 5480

76 MIN STRAIGHT

SHAFT TYPES 'S3','S4' & 'Z3'
3/4"-16 UNF-2B X 32
FULL THREAD DEPTH

SHAFT TYPES 'HS3','HS4' & 'HZ3'
Ø26.2 HOLE THROUGH MOTOR

SPLINE DATA


FOR SHAFT TYPES 'S3' & 'HS3'
TO BS 3550-1963 & ANSI B92.1, 1970
FLAT ROOT SIDE FIT, CLASS 1
PRESSURE ANGLE 30°
NUMBER OF TEETH 20
PITCH 6/12
MAJOR DIAMETER 87.953/87.825
FORM DIAMETER 80.264
MINOR DIAMETER 79.485/78.925
PIN DIAMETER 8.128
DIAMETER OVER PINS 97.084/97.030

SPLINE DATA


FOR SHAFT TYPES 'S4' & 'HS4'
INVOLUTE GEAR TOOTH FORM
PRESSURE ANGLE 20°
NUMBER OF TEETH 16
PITCH 5/10
MAJOR DIAMETER 86.360/86.233
FORM DIAMETER 76.124
MINOR DIAMETER 74.93/72.39
PIN DIAMETER 8.636
DIAMETER OVER PINS 92.710/92.581

FOR SHAFT TYPES 'Z3' & 'HZ3'
DIN 5480 W85 X 3 X 27 X 7H

**SHAFT TYPE 'T'
LONG TAPER WITH KEY**

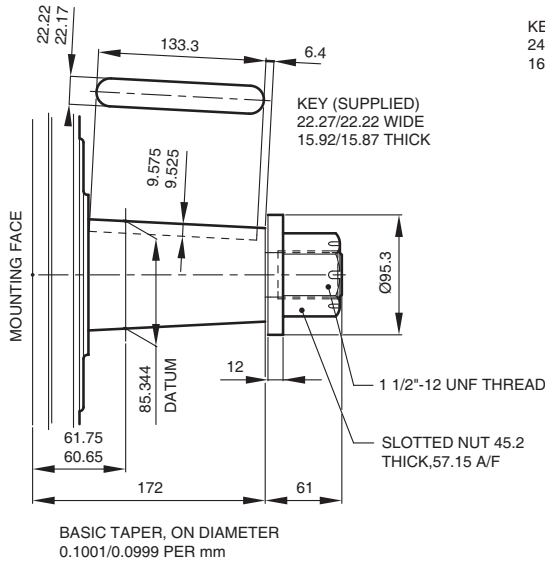

**SHAFT TYPES 'P1' & 'HP1'
CYLINDRICAL SHAFT WITH KEY**

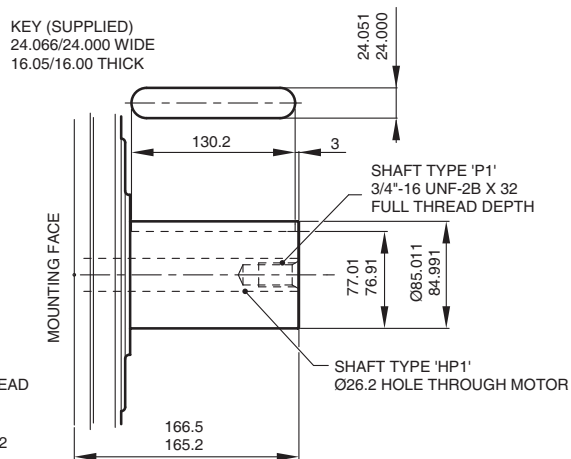


KEY (SUPPLIED)
24.066/24.000 WIDE
16.05/16.00 THICK




HDB 150/200 Shaft Specifications

SHAFT TYPES 'S5' & 'HS5'
23 SPLINES TO BS 3550-1963

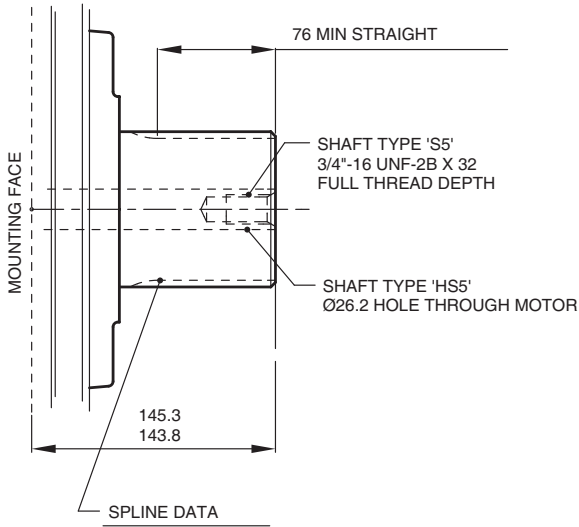


| | |
|-----------------------------------|-----------------|
| FOR SHAFT TYPES 'S5' & 'HS5' | |
| TO BS 3550-1963 & ASA, B5.15-1960 | |
| FLAT ROOT SIDE FIT, CLASS 1 | |
| PRESSURE ANGLE | 30° |
| NUMBER OF TEETH | 23 |
| PITCH | 6/12 |
| MAJOR DIAMETER | 100.652/100.526 |
| FORM DIAMETER | 92.939 |
| MINOR DIAMETER | 92.184/91.626 |
| PIN DIAMETER | 8.128 |
| DIAMETER OVER PINS | 109.573/109.517 |

SHAFT TYPES 'S3' & 'HS3'
20 SPLINES TO BS 3550-1963

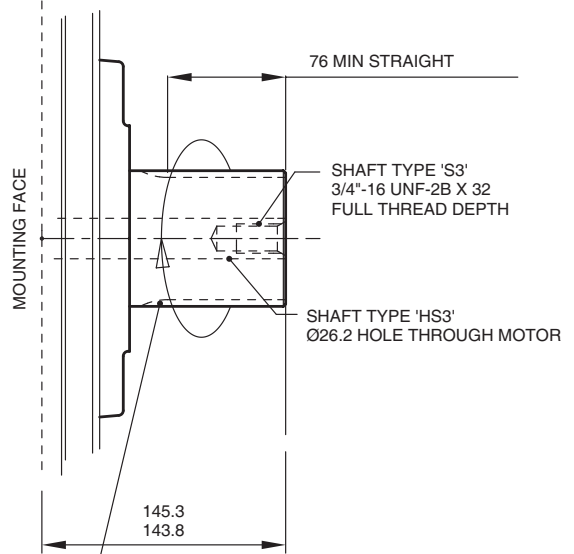

| | |
|-----------------------------------|---------------|
| FOR SHAFT TYPES 'S3' & 'HS3' | |
| TO BS 3550-1963 & ASA, B5.15-1960 | |
| FLAT ROOT SIDE FIT, CLASS 1 | |
| PRESSURE ANGLE | 30° |
| NUMBER OF TEETH | 20 |
| PITCH | 6/12 |
| MAJOR DIAMETER | 87.953/87.825 |
| FORM DIAMETER | 80.264 |
| MINOR DIAMETER | 79.485/78.925 |
| PIN DIAMETER | 8.128 |
| DIAMETER OVER PINS | 97.084/97.030 |

SHAFT TYPES 'Z5' & 'HZ5'
24 SPLINES TO DIN 5480

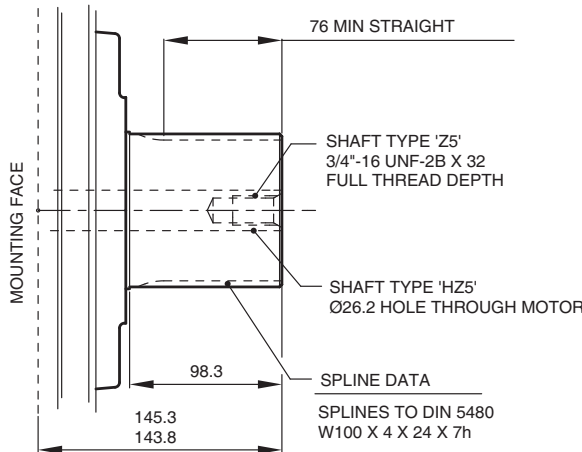


SPLINES TO DIN 5480
W100 X 4 X 24 X 7h



HDB 150/200 Shaft Specifications (continued)

SHAFT TYPE 'Q' & 'HQ'
FEMALE SHAFT WITH 34 SPLINES TO BS 3550

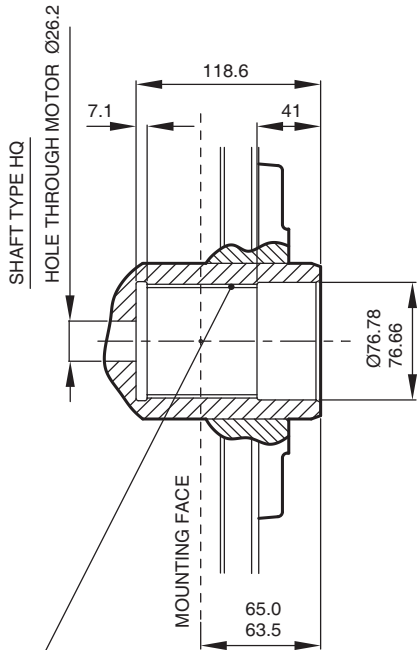


SPLINE DATA

| | |
|-----------------------------------|---------------|
| TO BS 3550-1963 & ASA, B5.15-1960 | |
| FLAT ROOT SIDE FIT, | |
| PRESSURE ANGLE | 30° |
| NUMBER OF TEETH | 34 |
| PITCH | 12/24 |
| MAJOR DIAMETER | 74.414/74.084 |
| MINOR DIAMETER | 69.977/69.850 |
| PIN DIAMETER | 3.658 |
| PIN FLATTED TO | 3.556 |
| DIAMETER BETWEEN PINS | 66.815/66.744 |


SHAFT TYPES 'P2' & 'HP2'
CYLINDRICAL SHAFT WITH KEY

KEY (SUPPLIED):
 24.066/24.000 WIDE
 16.05/16.00 THICK

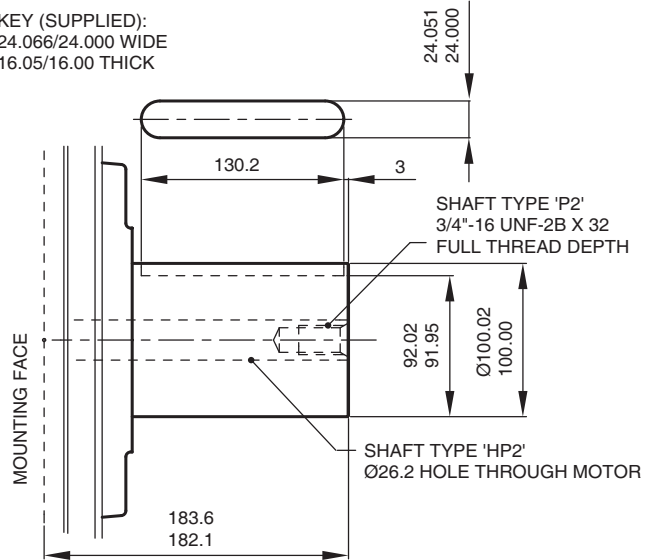

HDB 150/200 Shaft Specifications (continued)

**SHAFT TYPE 'X' & 'HX'
SHORT TAPER WITH KEY**

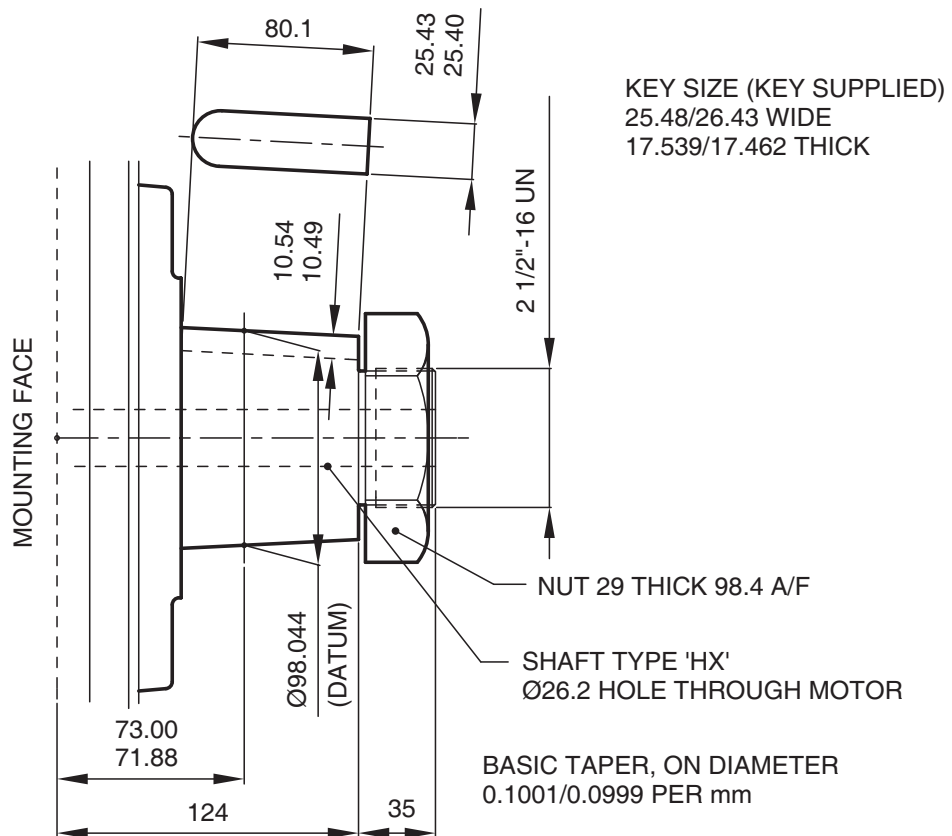

Model
Staffa


Page
57.70

Data Sheet
M-1001/03.00




HMB150/200 Valve Housings
3" Valve Housing with 6-Bolt Flange, "S03"

3" VALVE HOUSING WITH 6-BOLT FLANGE, 'S03'
 SUPPLIED WITH 2 'O' RING SEALS

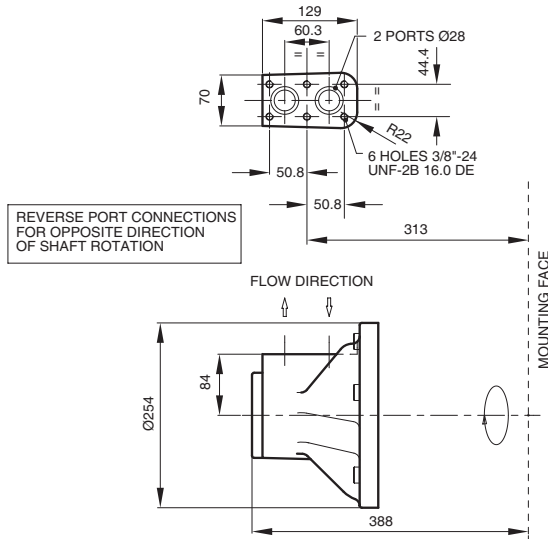

3" VALVE HOUSING WITH 1 1/4" SAE 4-BOLT FLANGES, 'F3'/FM3'
 IN MODEL CODE POSITION []

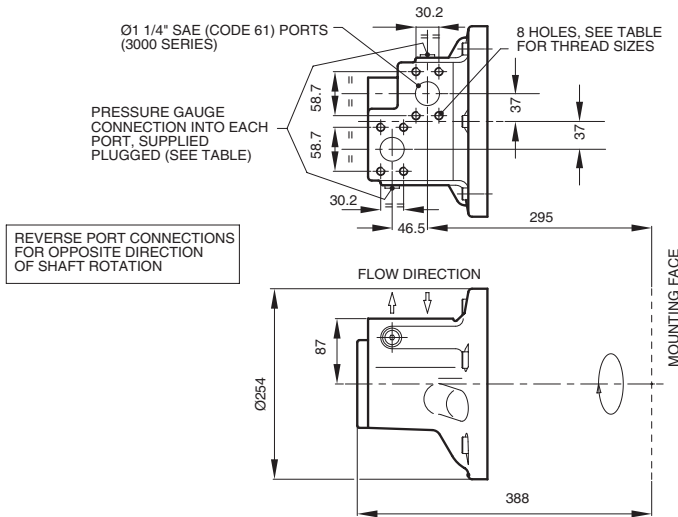

PORT FLANGE BOLT TAPPINGS


| MODEL CODE | TAPPING SIZE | GAUGE CONNECTIONS |
|------------|--|---------------------------|
| F3 | 7/16"-14 UNC-2B X 27 FULL THREAD DEPTH | 9/16"-18 UNF-2B, SAE J475 |
| FM3 | M12 X R1.75 X 27 FULL THREAD DEPTH | G1/4" (BSPF) |




HMB150/HMB200 Valve Housings (continued)

4" Valve Housing with 6-Bolt Flange, "S04"

4" VALVE HOUSING WITH 6-BOLT FLANGE, 'S04'
 SUPPLIED WITH 2 'O' RING SEALS

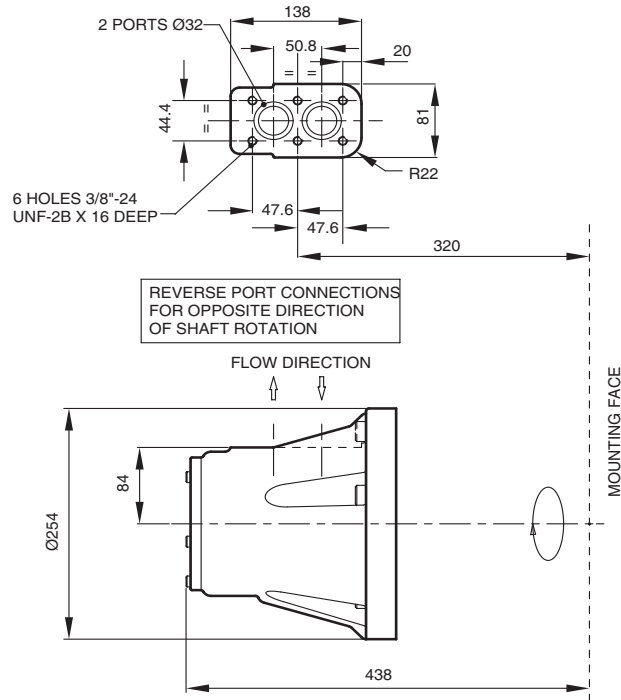

2 1/4" Valve Housing with 1" SAE 4-Bolt Flanges, F2/'FM2'

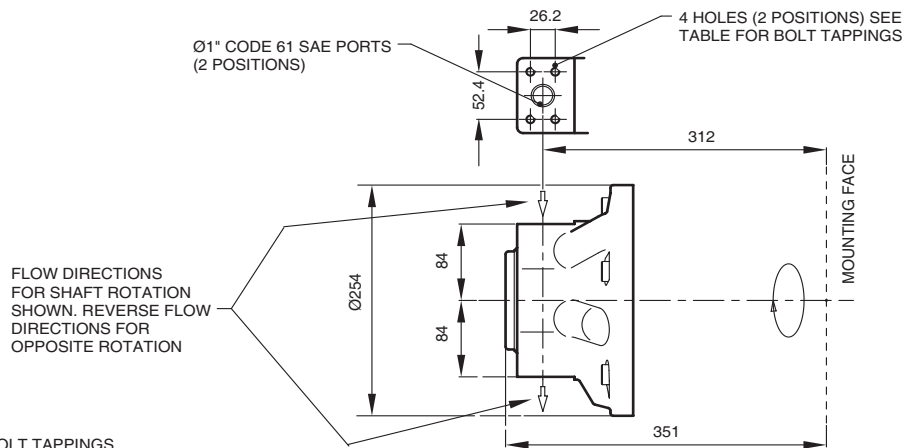

PORT FLANGE BOLT TAPPINGS



| MODEL CODE | TAPPING SIZE |
|------------|---------------------------------------|
| F2 | 3/8"-16 UNC-2B X 22 FULL THREAD DEPTH |
| FM2 | M10 X P1.5 X 22 FULL THREAD DEPTH |



Installation Drawings


HMB270 Motor with Type F4/FM4 (1 1/2 SAE) Port Connection (HMHDB270 Dimensions in brackets)

SEE ADDITIONAL VIEWS FOR SHAFT TYPES & 'SO4' PORT CONNECTION.

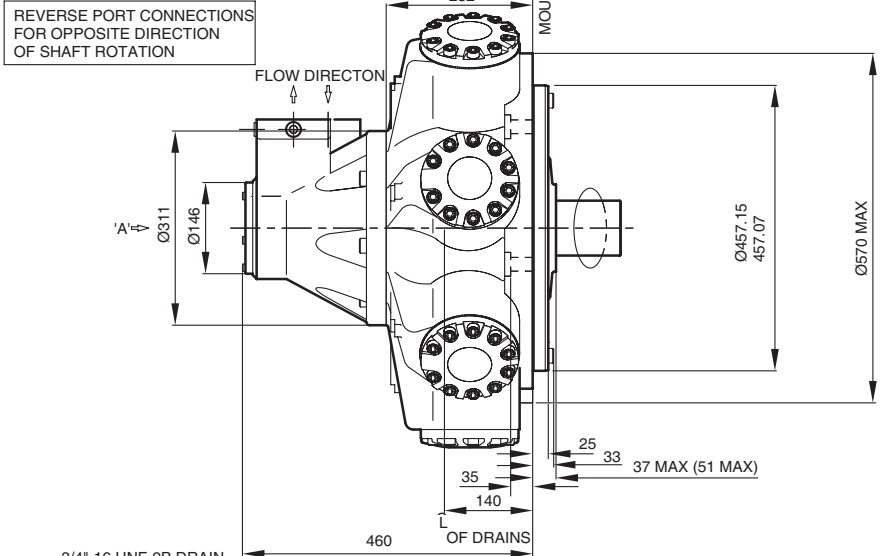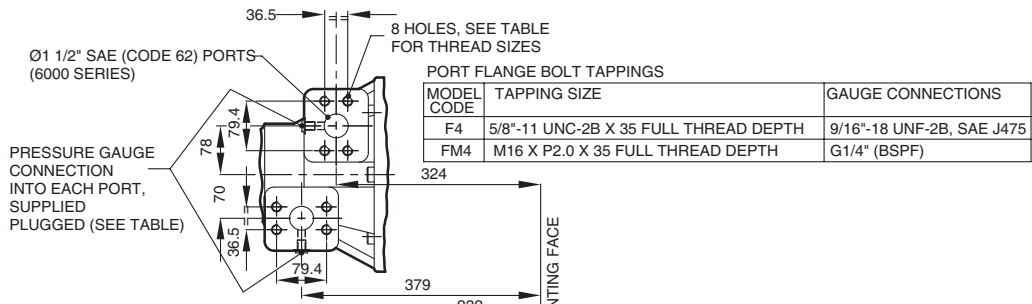

3/4"-16 UNF-2B DRAIN (CHOICE OF 3 POSITIONS)

NOTE:- ENSURE ON INSTALLATION DRAIN IS TAKEN FROM ABOVE MOTOR C/L DO NOT EXCEED 12 DEPTH OF COUPLING INTO DRAIN PORT

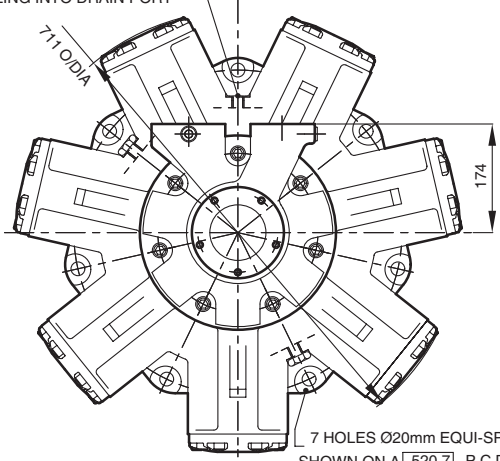

VIEW ON ARROW 'A' SPOTFACED TO GIVE EFFECTIVE Ø40 $\phi \pm 0.13$



Model Staffa




Page 60.70

Data Sheet M-1001/03.00

Installation Drawings

HMDB 325 Motor with Type F4/FM4 (1 1/2" SAE) Port Connection HM325 (Dimensions in Brackets)

SEE ADDITIONAL VIEWS FOR SHAFT TYPES & 'SO4' PORT CONNECTION.

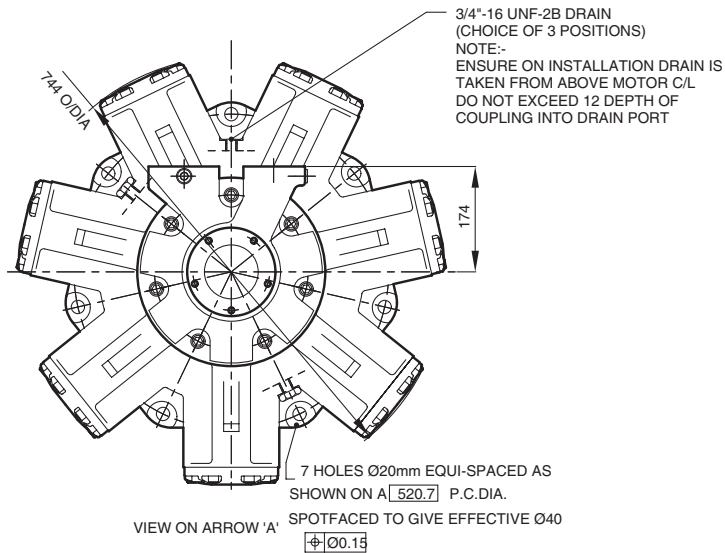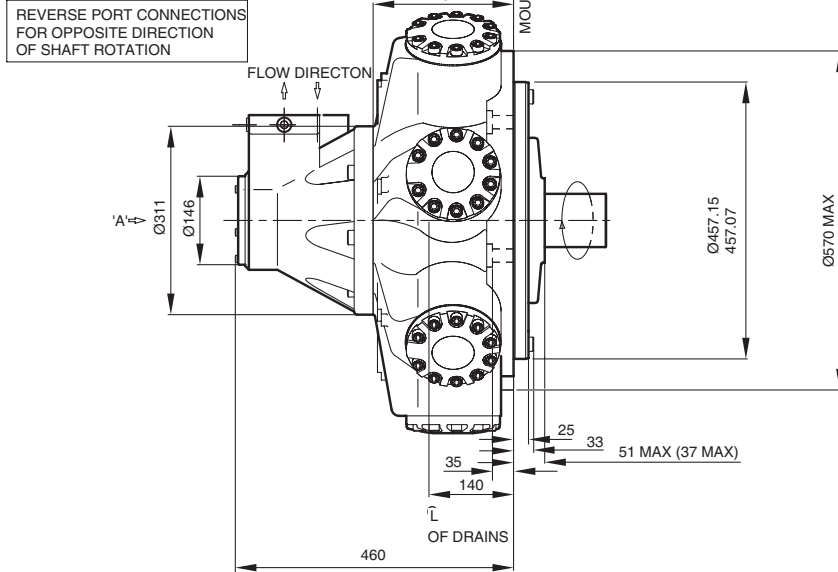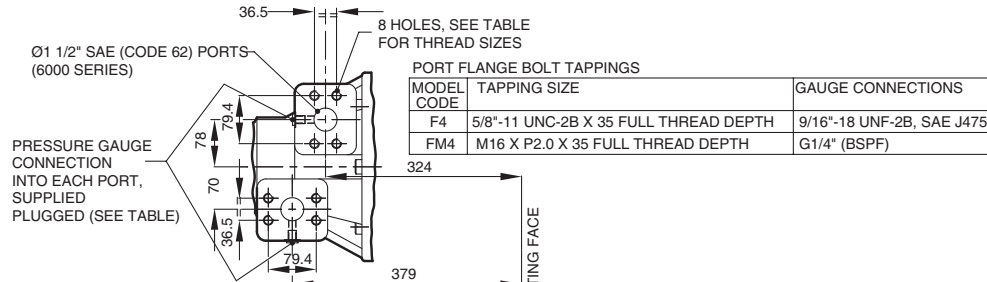

Model Staffa

Page 61.70


Data Sheet M-1001/03.00



HMB270/325 Shaft Specification

SHAFT TYPES 'S3' & 'HS3'
20 SPLINES TO BS 3550-1963

SHAFT TYPES 'Z' & 'HZ'
24 SPLINES TO DIN 5480

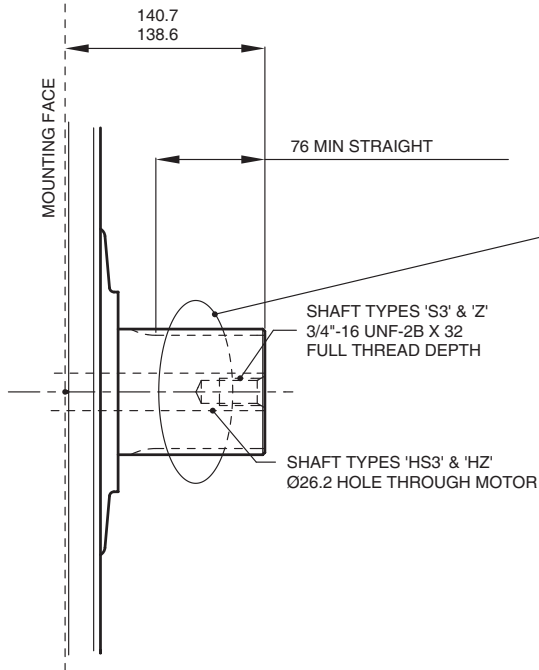


SPLINE DATA

FOR SHAFT TYPES 'S3' & 'HS3'
TO BS 3550-1963 (ANSI B92.1,1970 CLASS 5)
FLAT ROOT SIDE FIT, CLASS 1
PRESSURE ANGLE 30 °
NUMBER OF TEETH 20
PITCH 6/12
MAJOR DIAMETER 87.953/87.825
FORM DIAMETER 80.264
MINOR DIAMETER 79.485/78.925
PIN DIAMETER 8.128
DIAMETER OVER PINS 97.084/97.030

FOR SHAFT TYPES 'Z' & 'HZ'
DIN 5480, W100 X 4 X 24 X 7h

SHAFT TYPE 'Q' & 'HQ'
FEMALE SHAFT WITH 34 SPLINES TO BS 3550

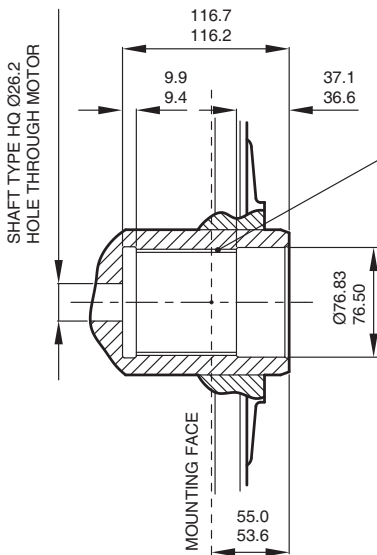

SPLINE DATA


TO BS 3550-1963
FLAT ROOT SIDE FIT
PRESSURE ANGLE 30 °
NUMBER OF TEETH 34
PITCH 12/24
MAJOR DIAMETER 74.414/74.084
MINOR DIAMETER 69.977/69.850
PIN DIAMETER 3.658
PIN FLATTED TO 3.556
DIMENSION BETWEEN PINS 66.815/66.744



HMB270/325 Shaft Specification (continued)


SHAFT TYPES 'P1' & 'HP1'
CYLINDRICAL SHAFT WITH KEY

KEY (SUPPLIED):
24.066/24.000 WIDE
16.05/166.00 THICK

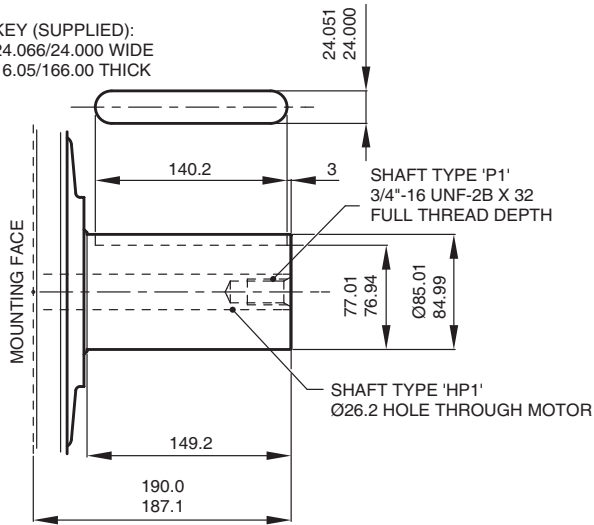

SHAFT TYPE 'T'
LONG TAPER WITH KEY


KEY (SUPPLIED):
25.45/25.40 WIDE
17.539/17.463 THICK

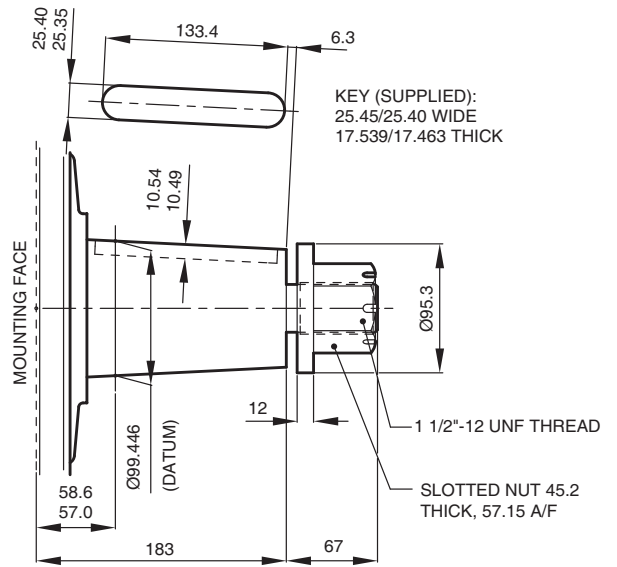

BASIC TAPER, ON DIAMETER
0.1001/0.0999 PER mm

SHAFT TYPE 'X'
SHORT TAPER WITH 2 KEYS

KEY SIZE (2 KEYS SUPPLIED):
25.48/25.43 WIDE
17.539/17.462 THICK

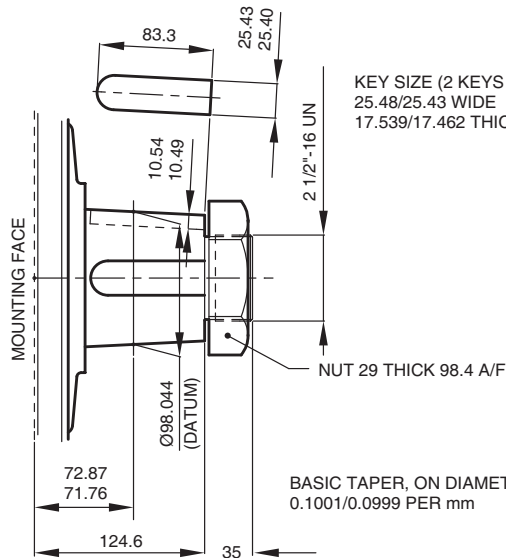

BASIC TAPER, ON DIAMETER
0.1001/0.0999 PER mm




Model
Staffa

Page
63.70


Data Sheet
M-1001/03.00

HMHDB270/325 Shaft Specification


SHAFT TYPES 'Z' & 'HZ'
24 SPLINES TO DIN 5480

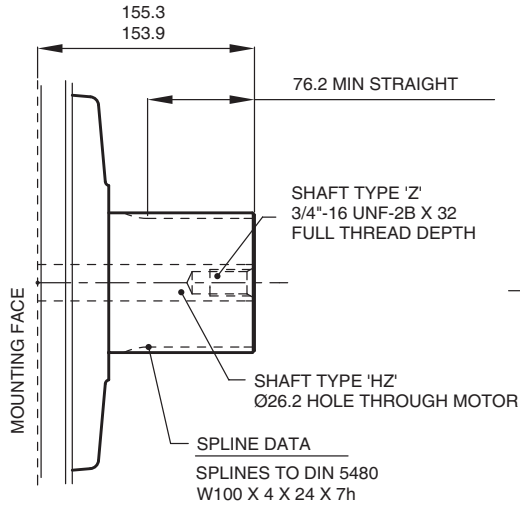


SHAFT TYPES 'S5' & 'HS5'
23 SPLINES TO BS 3550-1963

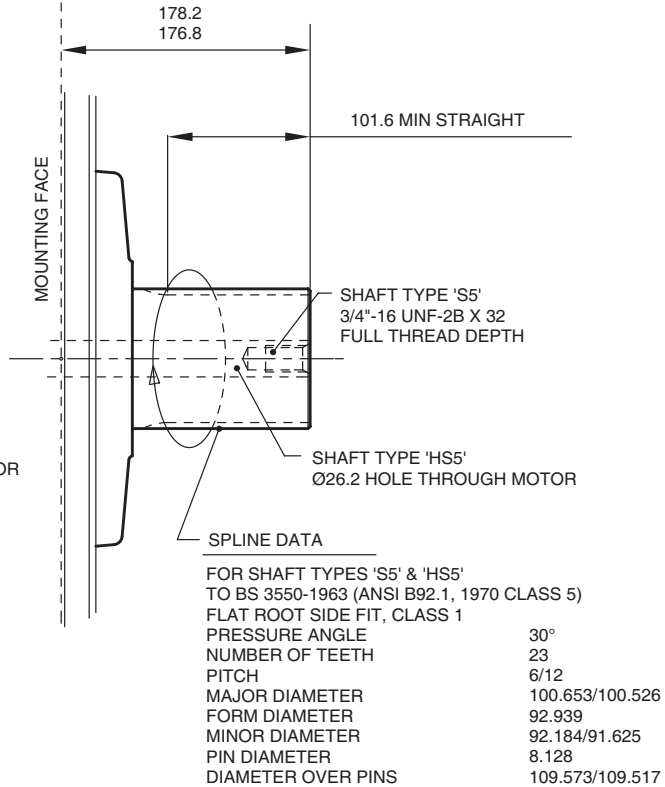

SHAFT TYPE 'X'
SHORT TAPER WITH 2 KEYS

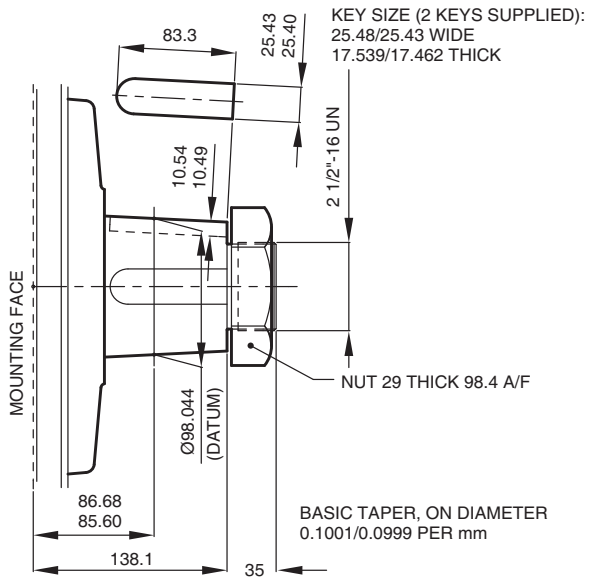


SHAFT TYPES 'P2' & 'HP2'
CYLINDRICAL SHAFT WITH KEY

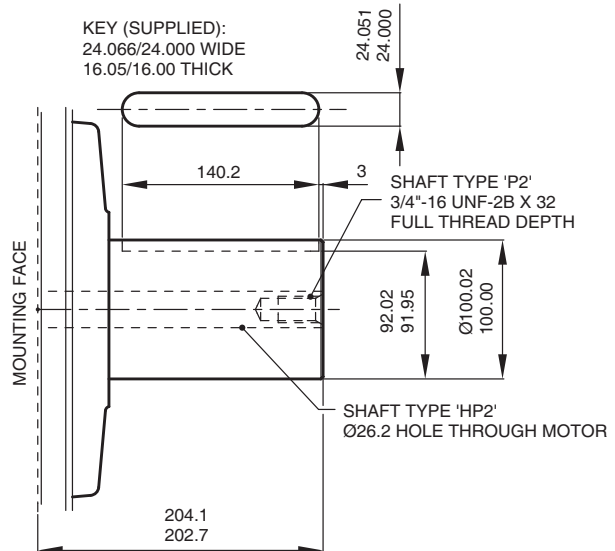

HMHDB270/325 Valve Housings
4" Valve Housing with 6-Bolt Flange, "S04"

SUPPLIED WITH 2 'O' RING SEALS

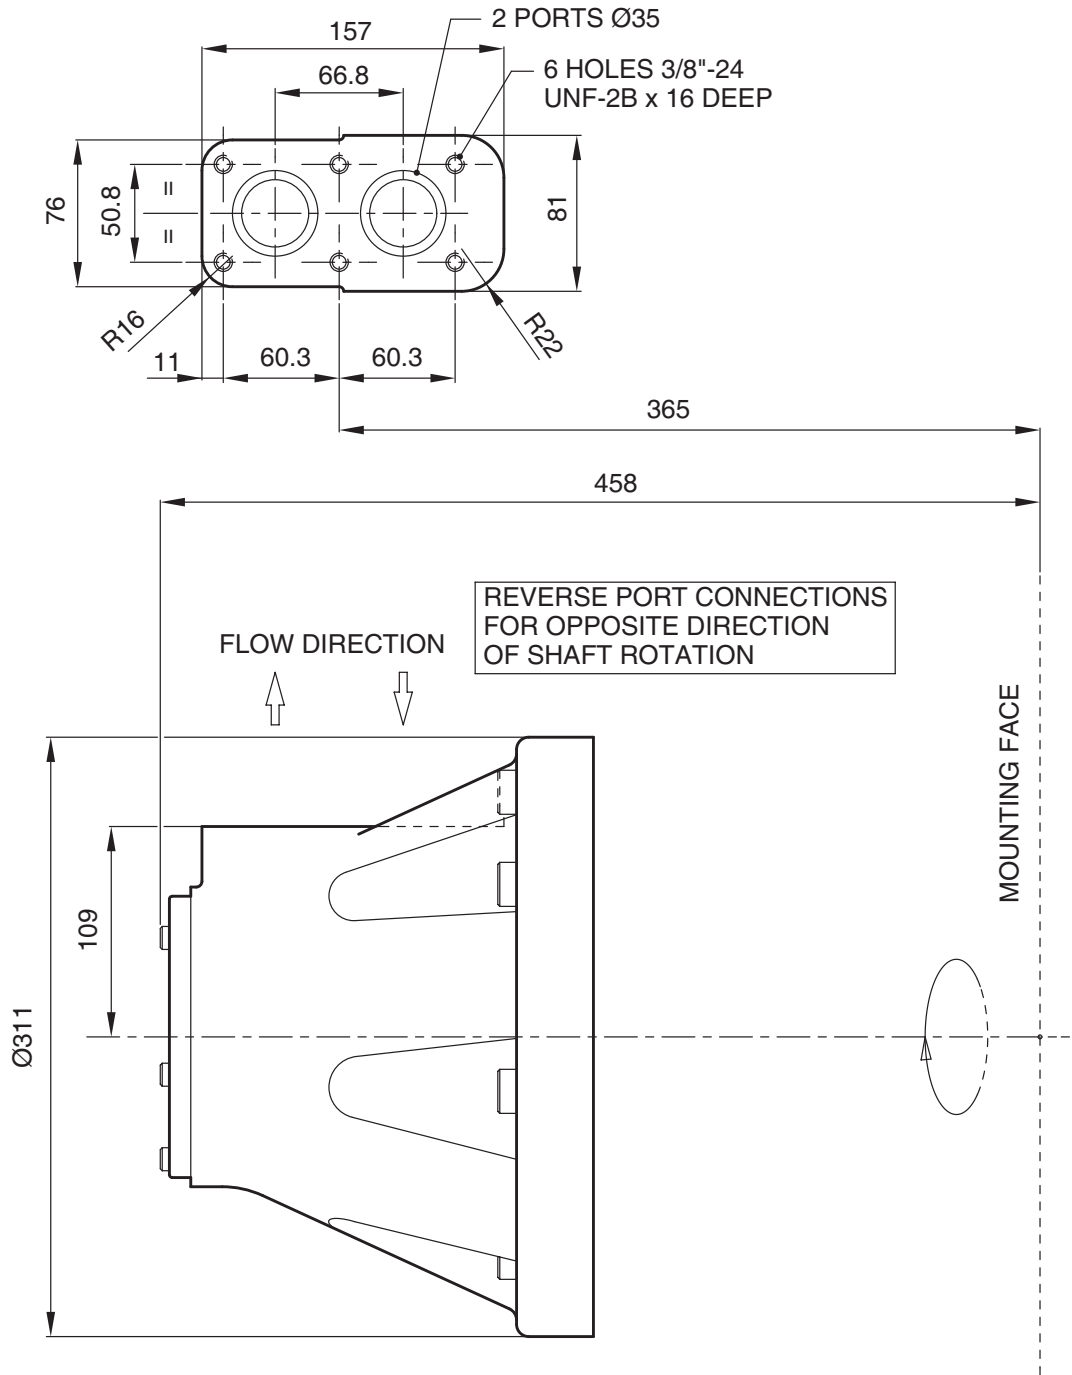

Model
 Staffa


Page
 65.70

Data Sheet
 M-1001/03.00

Installation Drawings

HMHDB400 Motor with 6-Bolt (UNF) Flange or SAE 2", 4-Bolt (UNF) Flanges

HDB400 MOTOR WITH 6-BOLT (UNF) FLANGE OR SAE 2" ,4-BOLT (UNF) FLANGES
SEE VIEWS FOR SHAFT TYPES & 'SO45' PORT CONNECTION.

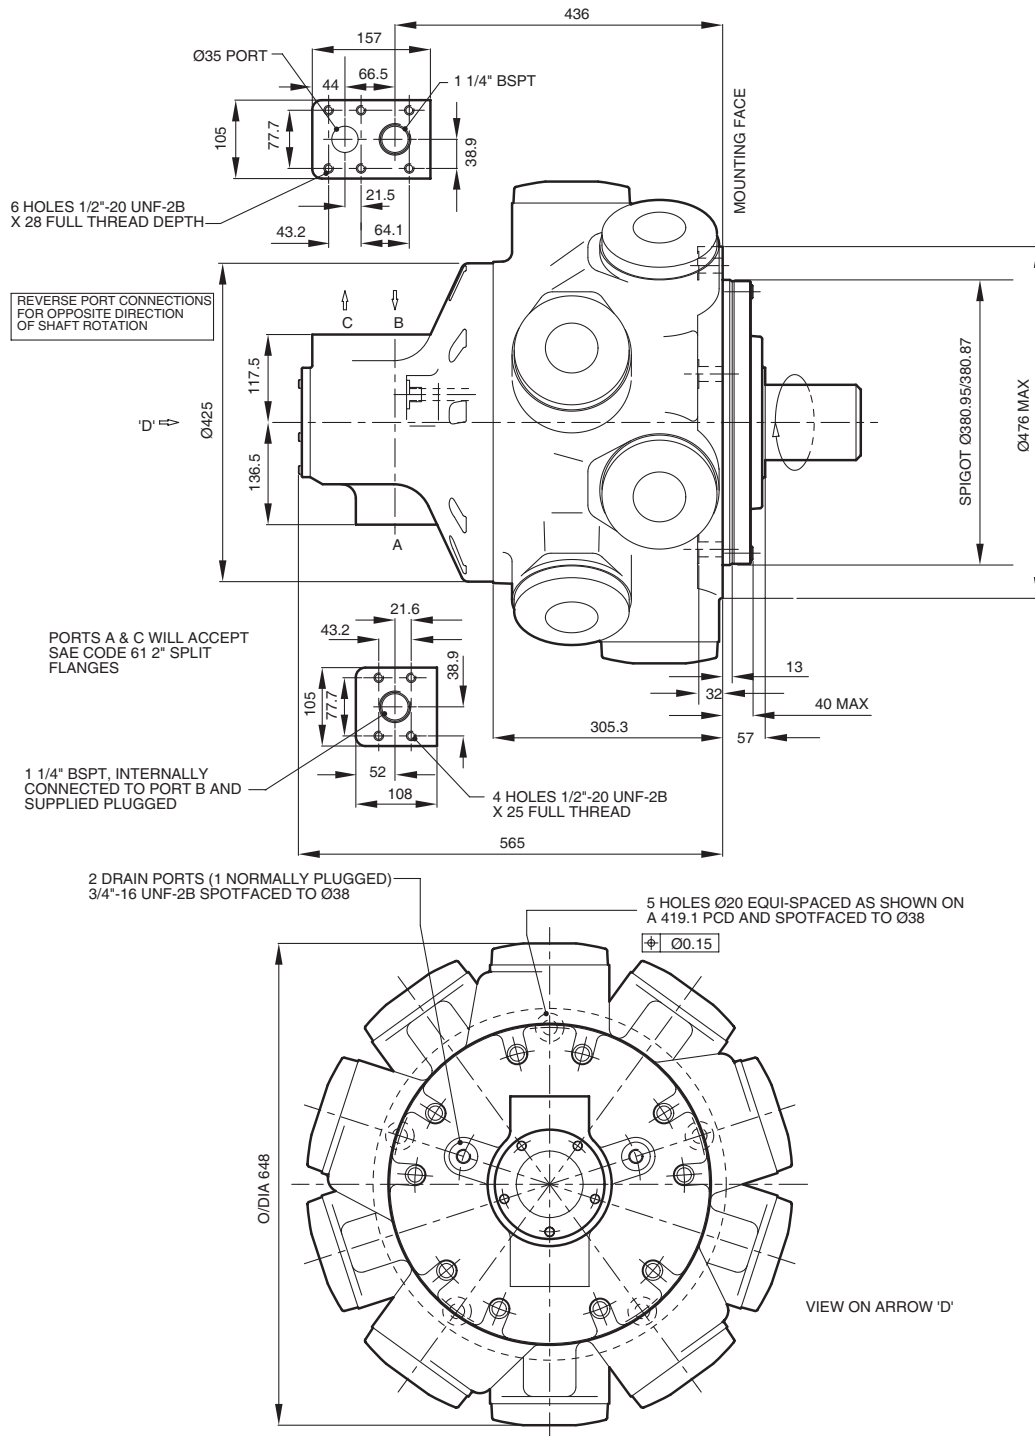


Model
Staffa

Page
66.70

Data Sheet
M-1001/03.00


HMHDB400 Shaft Specification

SHAFT TYPE 'P'
CYLINDRICAL SHAFT WITH 2 KEYS

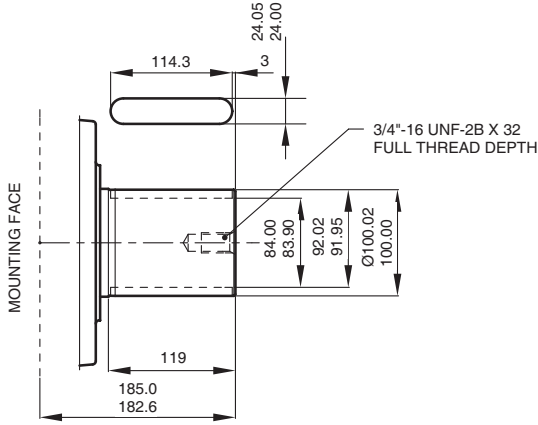

SHAFT TYPE 'S'
23 SPLINES TO BS 3550-1963

SHAFT TYPE 'Z'
24 SPLINES TO DIN 5480

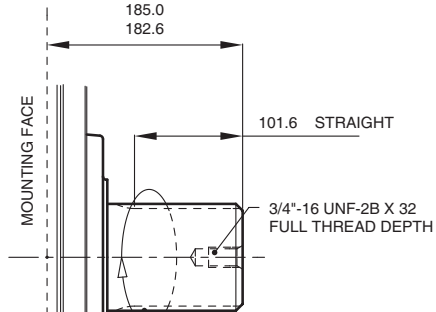


SPLINE DATA

FOR SHAFT TYPE 'S'
TO BS 3550-1963 (ANSI B92.1, 1970 CLASS 5)
FLAT ROOT SIDE FIT CLASS 1,
PRESSURE ANGLE 30°
NUMBER OF TEETH 23
PITCH 6/12
MAJOR DIAMETER 100.653/100.526
FORM DIAMETER 92.939
MINOR DIAMETER 92.184/91.625
PIN DIAMETER 8.128
DIAMETER OVER PINS 109.573/109.517

FOR SHAFT TYPE 'Z'
DIN 5480, W100 X 4 X 24 X 7h


SHAFT TYPE 'Q'
FEMALE SHAFT WITH 31 SPLINES TO BS 3550

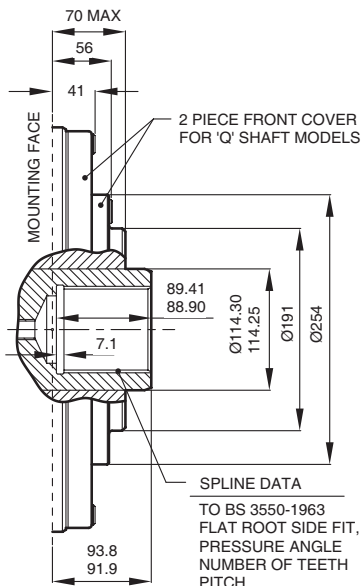

SPLINE DATA

TO BS 3550-1963
FLAT ROOT SIDE FIT,
PRESSURE ANGLE 30°
NUMBER OF TEETH 31
PITCH 10/20
MAJOR DIAMETER 81.66/81.28
FORM DIAMETER 80.83
MINOR DIAMETER 76.33/76.20
PIN DIAMETER 4.389
PIN FLATTED TO 4.293
DIAMETER BETWEEN PINS 72.466/72.309

SHAFT TYPE 'X'
SHORT TAPER WITH KEY

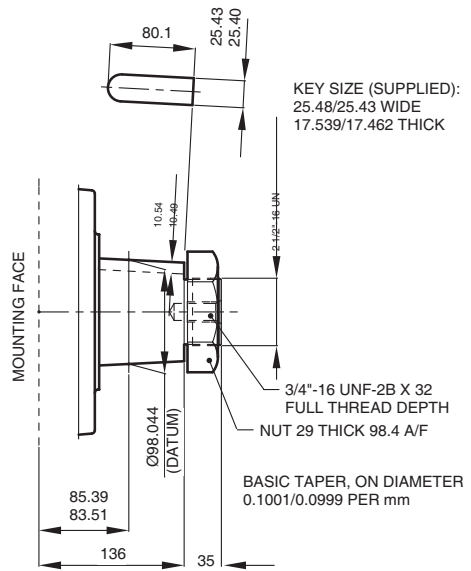


KEY SIZE (SUPPLIED):
25.48/25.43 WIDE
17.539/17.462 THICK

BASIC TAPER, ON DIAMETER
0.1001/0.0999 PER mm



HMHDB400 Valve Housings
Dual Port, 6-Bolt HDB400 Valve Housing

DUAL PORT, 6-BOLT FLANGE CONNECTION, 'SO45'

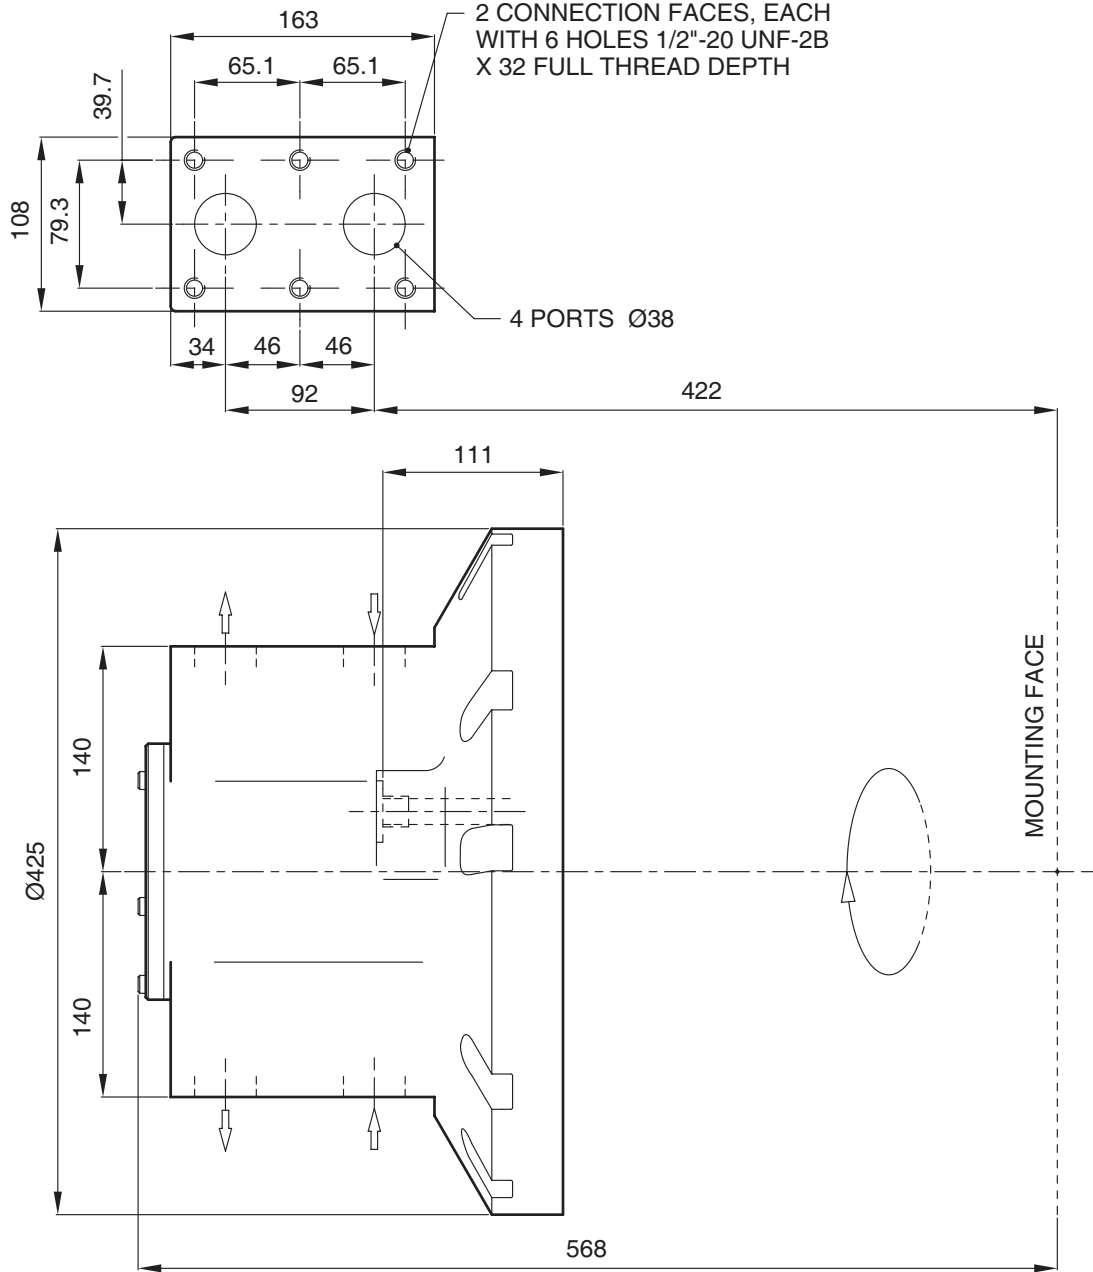

REVERSE PORT CONNECTIONS FOR OPPOSITE DIRECTION OF SHAFT ROTATION




Model Staffa

Page 68.70



Data Sheet M-1001/03.00

Installation Drawings
HMB700 Motor with 2 SAE (Code 62) Port
Flanges

SEE VIEWS FOR ADDITIONAL SHAFT TYPES.

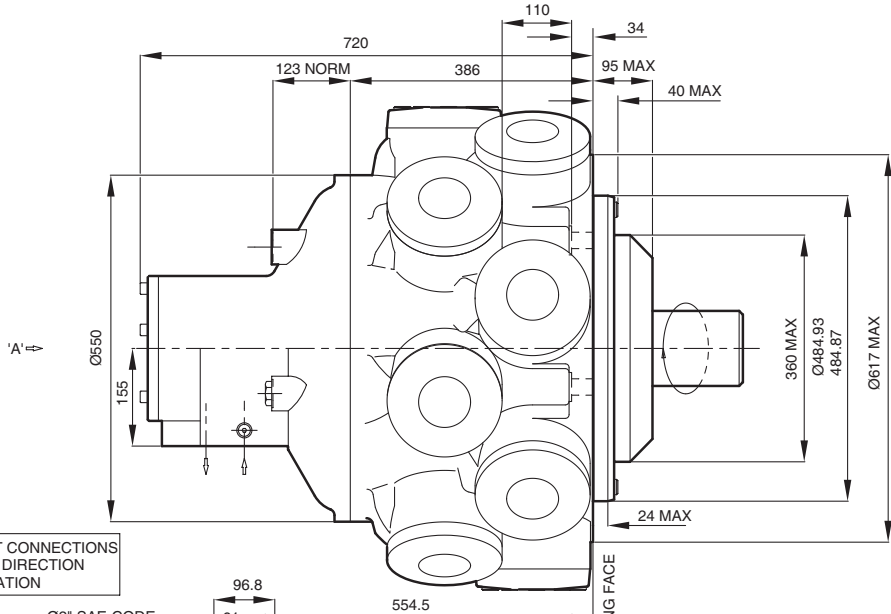

REVERSE PORT CONNECTIONS
 FOR OPPOSITE DIRECTION
 OF SHAFT ROTATION

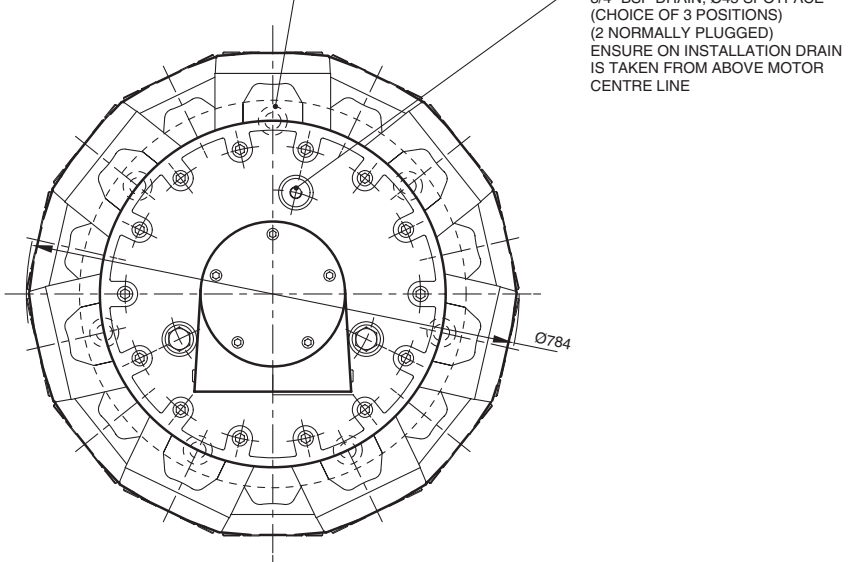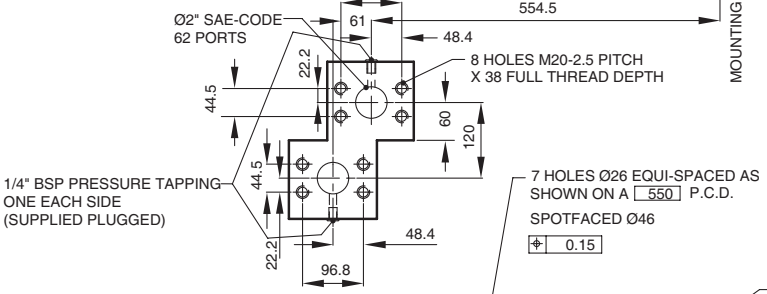

VIEW ON ARROW 'A'



| | | |
|-------------------------|-----------------------|------------------------------------|
| <p>Model Staffa</p> | <p>Page 69.70</p> | <p>Data Sheet M-1001/03.00</p> |
|-------------------------|-----------------------|------------------------------------|