



Electric Pick & Carry Cranes



MC 45SB (metric)
Max Capacity 4,500 Kg

MC 45SB

RADIO REMOTE CONTROLLED

FRONT-WHEELS DRIVE WITH COUNTER ROTATION

REMOVABLE COUNTERWEIGHT

SEQUENTIAL BOOM

Options :

- HYDRAULIC WINCH
- BENDABLE MANUAL JIB
- MANUAL EXTENSION
- NON-MARKING TIRES
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING



Technical features



Max Capacity kg	 4,500
Dimensions mm	 2390x930x1595

HOOK

	Front-wheels drive. 2 electric motors AC 5 kW 48V Insulation class H	LMI.	Electronic safe load indicator and tilting moment limiter
	Total Kg. 5,400 Removable counterweight Kg. 1,140		Automatic braking system on all wheels
	48 V - 560 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
	Front nr. 2 superelastic 22x9x16" Rear nr. 2 superelastic 8x6-12 1/8"		+65°/-12°
	Rear Steering angle -90°/+90°		Motor driven pump 9 kW - 48 V AC, Insulation class H



Load charts

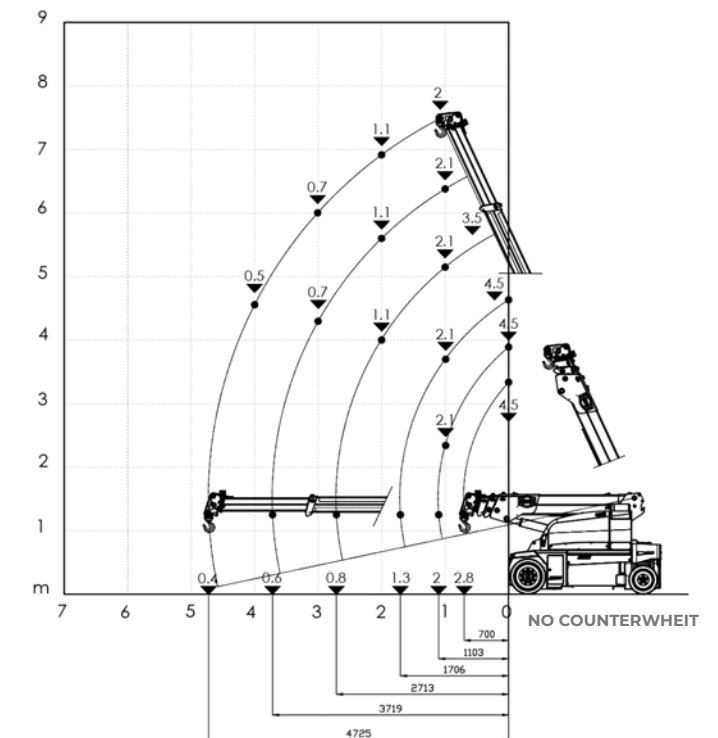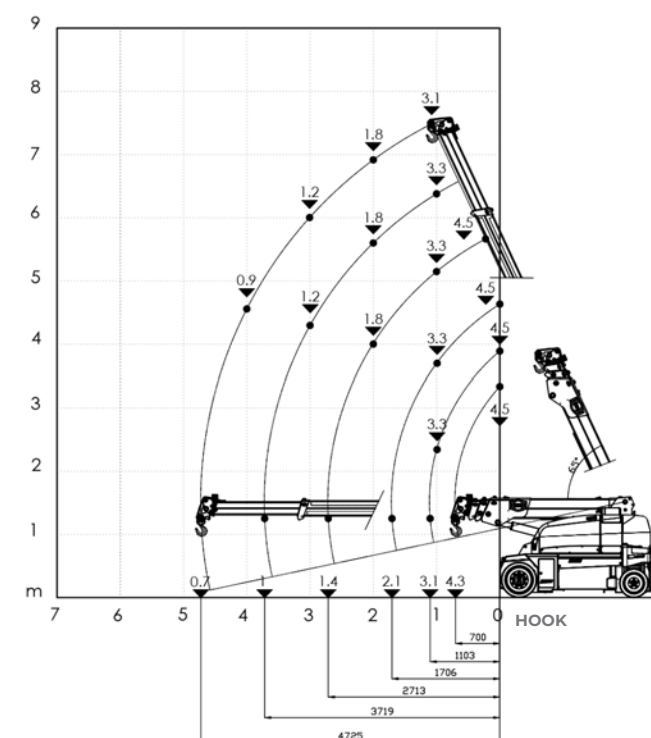

EU Standards CE

	UNI ISO 4301-2: A1
	2006/42 CE-2014/30 UE- 2000/14-4301 -1:A1 e and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 e and subsequent modifications



Dimensions

