EPAL CP5 PALLET

760 x 1,140 mm





Safety and quality are of particular importance in the chemicals industry. Protecting employees, the environment and the load itself take priority. With the new quality-assured EPAL CP pallets, EPAL is closing a major gap in the chemicals industry's logistics chain. You can obtain EPAL CP pallets 1 - 9 from any one of the more than 1,500 licensed manufacturers and repairers. Supplier search under www.epal.eu.

FACTS & FIGURES

Materials: 13 boards of quality timber, 9 woodchip or solid wood blocks, 60 nails. Produced according to the EPAL Technical Regulations.

 Length
 760 mm

 Width
 1,140 mm

 Height
 138 mm

MARKINGS



"EPAL in oval" on the right-hand corner block.



IPPC symbol, country code, registration number of the national plant protection authority, heat treatment on the left-hand corner block.

CP5


CP type marking and EPAL ID number (licence number-year-month) on the central block.



EPAL control staples

HANDLING

4-sided accessibility and high quality enable efficient handling during production, storage and transportation all the way along the supply chain. Compatible with all (conventional) standard load carriers, industrial trucks and warehouse systems. Use: As container pallet for cardboard boxes and crates.



QUALITY CONTROL

EPAL load carriers around the world are subject to independent quality inspections carried out by external inspection organisations. This is the only way for EPAL load carriers to guarantee the consistently high quality that they offer the markets.







ISPM 15

Compliance with the ISPM 15 standard is an essential condition for the unrestricted use of load carriers in the international movement of goods.

All EPAL CP pallets are therefore pro-


duced according to the stringent specifications of the IPPC and can thus be deployed around the globe. Local plant protection agencies will provide information on the countries that recognise the IPPC standard.

EPAL CP5 PALLET


760 x 1,140 mm



1,140 mm side

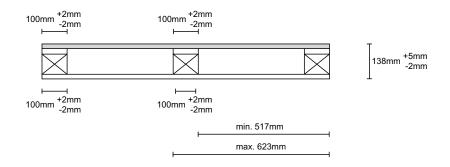

760 mm side



Top view

