


# ¡PROTEJA SUS EXPORTACIONES!



[www.j2servid.com](http://www.j2servid.com)

## ► SAFETY SHEET FOR CONTAINERS ◀

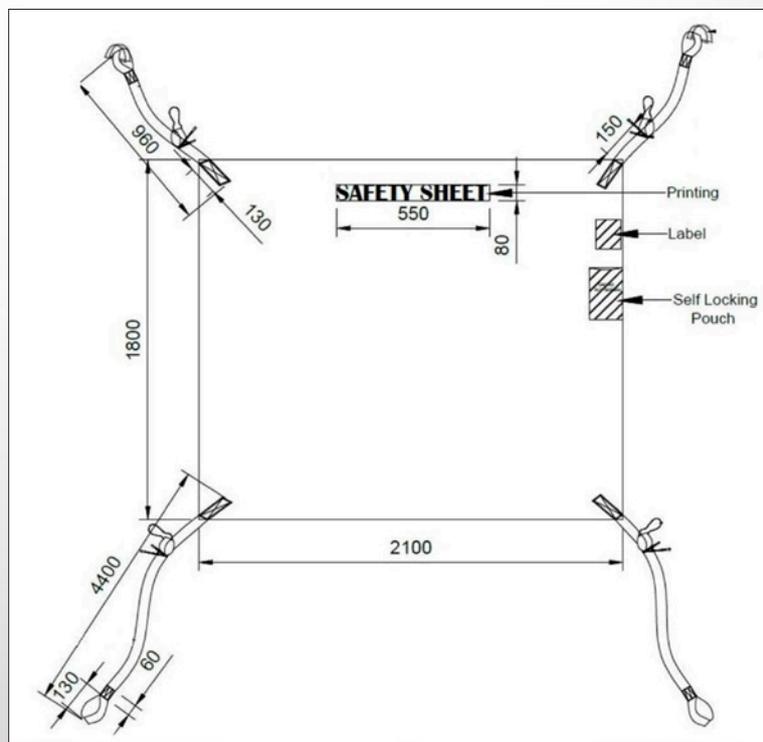

Carabine hooks (100x10mm) linked to nylon webbing by cable tie. Hooks are hanged to container lugs.


# ¡PROTEJA SUS EXPORTACIONES!



Carabine hooks linked to nylon webbing by cable tie. Hooks are hanged to container lugs.



Installed Safety Sheet

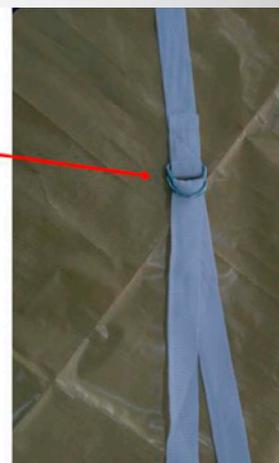

Manual tightener points with lashings passed into 'D' rings prepared during manufacturing

## SHEET :

- Woven Polypropylene
- GSM-160
- Lamination: Single side lamination.
- Size: 180 x 210cm
- Color: Yellow
- Strength: 1150kgs (uniformly spread on whole surface)



## LASHINGS :

- Material: Nylon
- Width: 50mm
- Color: White
- Strength: 880 daN each



## CARABINE SNAPHOOK :

- Material: Galvanised Steel
- Thickness: 10mm
- Size: 10x100x48mm
- Strength: 835 daN each



# ¡PROTEJA SUS EXPORTACIONES!



## STITCHING :

- 4 lines of polyester sewing with Auto Machine.



## LABELS :

- Quality label sewn on sheet including serial no. + production date + signature of QC dept.



The Safety Sheet has been tested recently.

The results of multiple tests:

Breaking strength: 6.38 kN - 7.13 kN  
(drawn diagonally)



## PACKAGING :

- Pallet type: eco pallet
- Size: 960 x 1120 x 600mm
- Shipping weight: 202kgs gross (approx.)
- Quantity per pallet: 100 units
- Stackable: Yes – max. 4 high

