


Drives & Motors for Tunnel Ventilation and Smoke Extraction



Drives & Motors for Tunnel Ventilation and Smoke Extraction

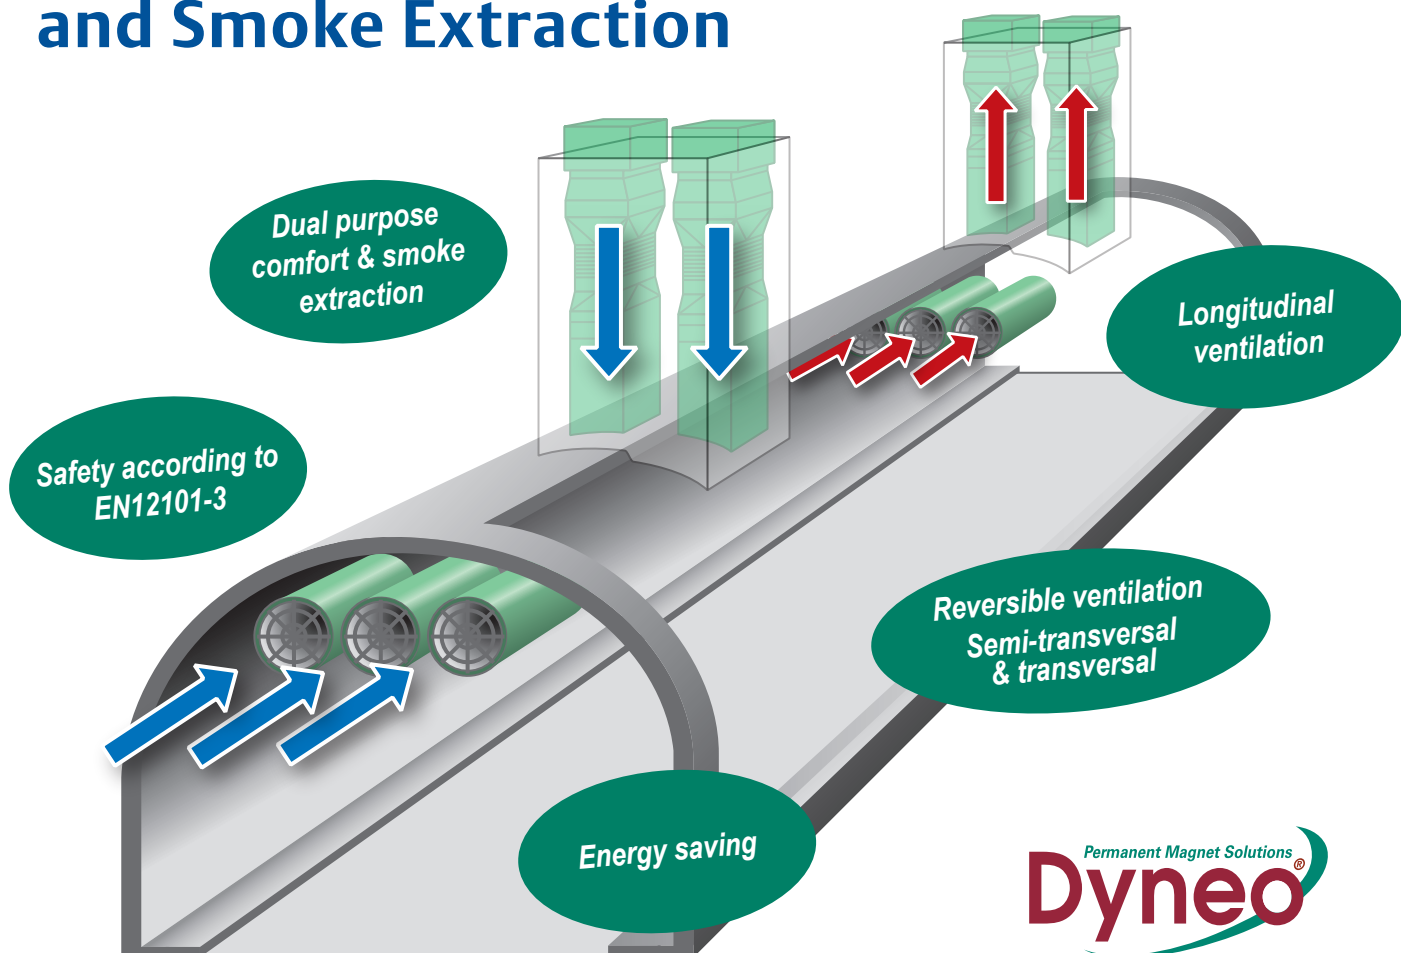


Complete offer up to 1MW


- **Single and 2 speed motors**
 - 200°C: 2 hours
 - 250°C: 2 hours
 - 300°C: 1 or 2 hours
 - 400°C: 2 hours
- **Synchronous permanent magnet motors**
 - energy saving
 - reduce dimensions and weight
 - easy maintenance
- **Smoke extraction motors adapted for VSD application with homologation according to EN 12101-3 standard**
- **Softstarter with integrated bypass up to 1000A**
 - fire mode 
- **Variable speed drives**
 - modular design
 - wall mount or free standing
 - local or remote HMI with drive parameters saving
 - vibration monitoring in option
 - low harmonic
 - 2/4 quadrants
 - fire mode 
 - 70°C 1 hour certification 

Service

- Service Centers
- Preventive maintenance
- Commissioning
- Training

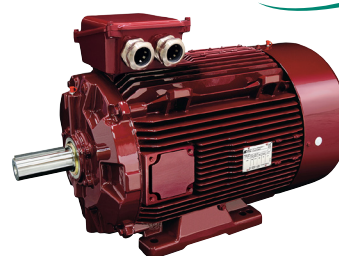

Synchronous permanent magnet motors

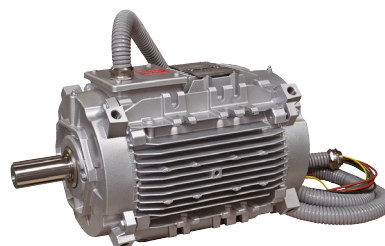

Smoke extraction asynchronous 3-phase motors



HMI



Softstarters



Variable speed drives