



HIGH TEMPERATURE DRYER BELTS

JOINT TYPES (SEAM)

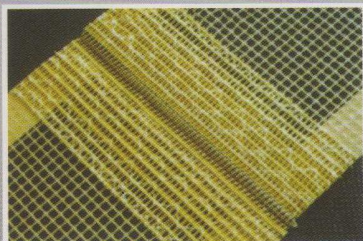

PEEK SPIRAL JOINT

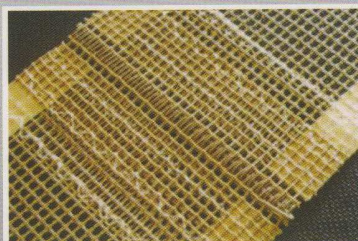

KEVLAR BULLNOZE JOINT




CLIPPER JOINT



ALLIGATOR JOINT


EDGE REINFORCEMENT TYPES




PTFE / GLASS
Type G



KEVLAR
Type K



PTFE FILM WHITE
Type T



PTFE FILM RED
Type U

SAMPLE BELT CODING

Please send us your belt inquiries using the form below.

9002
Belt Type

K
Edge Type

CLIPPER JOINT
Joint Type

19500 mm. x 2500 mm.
Belt Length Belt Width

HI-FRICTION ROLL COVERING TAPE FOR TEXTILE DRYERS

Product name : **SIL-AD Tape** – Hi-Friction Roll Covering Tape

SIL-AD Tape will provide hi-friction surface on drive roller and will prevent teflon coated open-mesh belt from sliding. If metal drive roller is covered by SIL-AD Tape, operators do not need to increase belt tension. This will improve the belt's life.

SIL-AD Tape has a high temperature resisting adhesive on back (covered with yellow liner) which makes it very easy to cover the roller. Metal roller surface should be free off dust, oil etc. (if necessary, it should be cleaned with xylene or acetone). Liner can easily be taken off from tape and covered on to the roller.

