


Túneles y Armarios de lavado



HIGIENE
INDUSTRIA
ALIMENTARIA

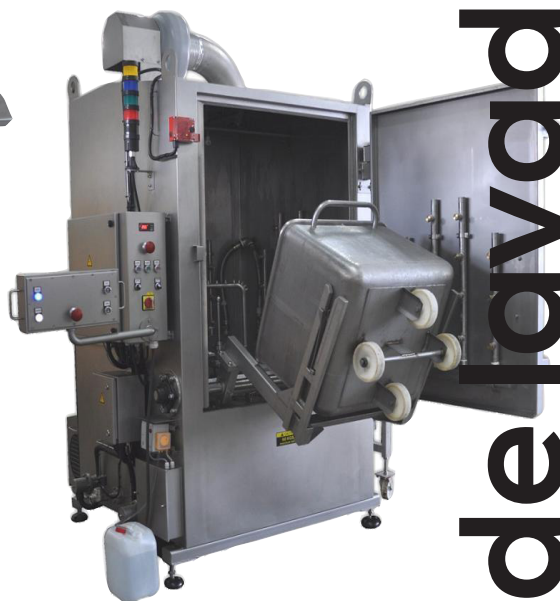

TÚNELES Y ARMARIOS DE LAVADO

	DIMENSIONES L/A/h(mm)	PRODUCCIÓN (uds./h.)	CALENTAMIENTO (eléctrico/vapor)	VOL. DEPÓSITO (Litros)	POTENCIA DE LA BOMBA	TIPO DE CAJA
--	--------------------------	-------------------------	------------------------------------	---------------------------	-------------------------	-----------------

TÚNELES DE LAVADO

STRM-20.0001.03	3100x1050x1650	100	14 kW	150	1,5kW/10m³/h	1
STRM-20.1001.03	3100x1050x1650	100	3-10 bar, 135°C	150	1,5kW/10m³/h	1
STRM-20.0001.00	3100x1050x1650	140	14kW	200	2,2kW/14m³/h	1
STRM-20.1001.00	3100x1050x1650	140	3-10 bar, 135°C	200	2,2kW/14m³/h	1
STRM-20.0002.00	3450x1050x1650	240	22kW	200	4kW/33m³/h	1
STRM-20.1002.00	3450x1050x1650	240	3-10 bar, 135°C	200	4kW/33m³/h	1
STRM-20.0003.00	3450x1300x1650	320	22kW	300	4kW/33m³/h	1
STRM-20.1003.00	3450x1300x1650	320	3-10 bar, 135°C	300	4kW/33m³/h	1
STRM-20.0004.00	5400x1050x2000	450	44kW	800	8kW/33m³/h	1
STRM-20.1004.00	5400x1050x2000	450	3-10 bar, 135°C	800	8kW/33m³/h	1
STRM-20.0006.00	5400x1300x2000	600	44kw	800	8kW/33m³/h	1
STRM-20.1006.00	5400x1300x2000	600	3-10 bar, 135°C	800	8kW/33m³/h	1

TÚNELES DE LAVADO CON MÓDULO DE SECADO

STRM-20.0202.00	4720x1250x1650	240	22kW	320	4kW/33m³/h	1
STRM-20.1202.00	4720x1250x1650	240	3-10 bar, 135°C	320	4kW/33m³/h	1
STRM-20.0203.00	4625x1500x1770	320	22kW	400	4kW/36m³/h	1
STRM-20.1203.00	4625x1500x1770	320	3-10 bar, 135°C	400	4kW/36m³/h	1
STRM-20.0204.00	6670x1050x1610	450	44kW	800	8kW/33m³/h	1
STRM-20.1204.00	6670x1050x1610	450	3-10 bar, 135°C	800	8kW/33m³/h	1
STRM-20.0206.00	6560x1500x1770	600	44kW	800	8kW/33m³/h	1
STRM-20.1206.00	6560x1500x1770	600	3-10 bar, 135°C	800	8kW/33m³/h	1

TÚNELES DE LAVADO CON SISTEMA PARA UN SOLO OPERARIO

STRM-20.0001.20	3250x1050x2260	140	14kW	200	2,2kW/14m³/h	1
STRM-20.1001.20	3250x1050x2260	140	3-10 bar, 135°C	200	2,2kW/14m³/h	1
STRM-20.0002.02	3650x1100x2260	240	22kW	300	4kW/33m³/h	1
STRM-20.1002.20	3650x1100x2260	240	3-10 bar, 135°C	300	4kW/33m³/h	1

ARMARIOS DE LAVADO PARA CARROS CUTTER 200L

STRM-21.0120.00	2040x1790x2740	30	33kW	~	7kW/48m³/h	2
STRM-21.1120.00	2040x1790x2740	30	3-10 bar, 135°C	~	7kW/48m³/h	2
STRM-21.8120.00	2040x1790x2740	30	33kW / 3-10 bar	~	7kW/48m³/h	2

ARMARIOS DE LAVADO PARA CARROS 200L Y CONTENEDORES 100L

STRM-21.6120.00	2650x1640x3560	30/25	33kW	~	11kW/90m³/h	2
STRM-21.7120.00	2650x1640x3560	30/25	3-10 bar, 135°C	~	11kW/90m³/h	2
STRM-21.4120.00	2080x1830x3200	30	33kW	~	7,5kW/62m³/h	2
STRM-21.5120.00	2080x1830x3200	30	3-10 bar, 135°C	~	7,5kW/62m³/h	2

MÁQUINAS DE LAVADO PARA EQUIPAMIENTO NO ESTANDAR

STRM-22.1020.00	1850x1620x1390	~	33kW	~	4kW/33m³/h	~
STRM-22.2020.00	1850x1620x1390	~	3-10 bar, 135°C	~	4kW/33m³/h	~

1- Las cajas tienen una dimensión de 600x400x120-400mm

2- Los tipo de contenedor es el DIN9797



Scanio Systems S.L.
Ronda General Mitre, 102 L/B, 08021, Barcelona
Tel: 93 432 69 39 Fax: 93 43262 97
e-mail: info@scaniosystems.com
www.scaniosystems.com