



VENTA, INSTALACION Y REPARACION DE MAQUINARIA INDUSTRIAL



420 - Tronzadora un cabezal ACK 420

Tronzadora un cabezal diseñada para corte recto y en ángulo para PVC y aluminio.

Información técnica:

- Puntos de ubicación a 60° -45° -30° -22.5° -15° 0°
- Ángulos intermedios a través de bloqueo manual
- Fácil acceso para el cambio disco
- Cerca trasera móvil para mayor capacidad de corte
- Cubierta protectora con interruptor de seguridad
- Cuchilla de alimentación hidro-neumática para corte suave (totalmente ajustable)
- 2 pinzas verticales neumáticas

Tecnical specifications:

- Two-hand safety operation
- Location points at 75°,60°,45°,30°,22.5°,15°,0°, both left and right
- Pivoting range from -75° left to +75° right infinitely adjustable
- Hydro-pneumatic saw feed
- Adjustable back fence for most effective use of the saw blade
- Adjustable saw blade feeding speed
- Manually opening safety guard
- Interior LED lighting




VENTA, INSTALACION Y REPARACION DE MAQUINARIA INDUSTRIAL

- Pistola de aire pulverizadora incluida
- Mesa de apoyo con rodillo incluido de 3m (MKN 300)
- Cuchilla de gran calidad incluida

OPCIONALES

- Abrazaderas horizontales
- Lubricador de hoja en aerosol

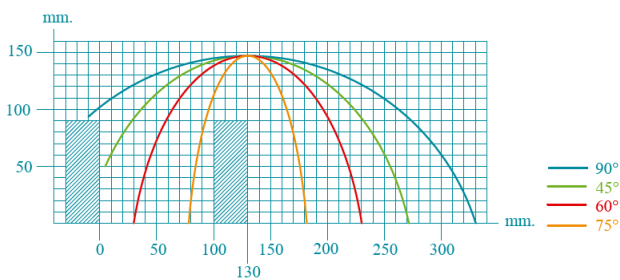

STANDARD ACCESSORIES

- Equipped with saw blade Ø 420 mm
- MKN 301 roller conveyor (3 m)
- 2 x vertical clamps
- Spray saw blade lubrication system (ACK 420S)
- Air gun

OPTIONAL ACCESSORIES

- Additional saw blade Ø 420 mm • 2x vertical clamps

Características:

2.2kW 50/60Hz	230V AC P N PE 400V AC 3P PE	3000 D/dak RPM	D: 420 d: 30/32 mm	34 Lt/dak.	6/8 Bar	W: 95 L: 95 H:149 cm	260 kg.	210 kg.

Product Gallery:

